




□ · BASF
We create chemistry

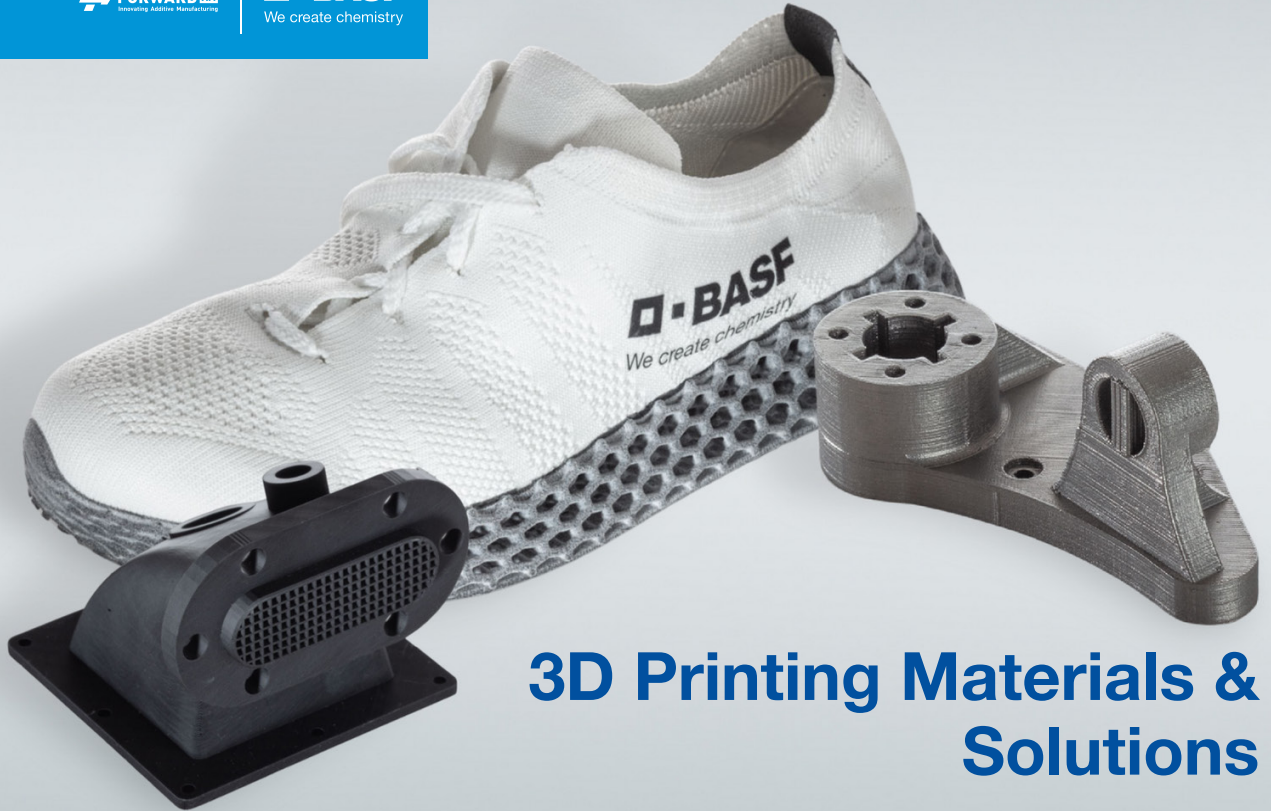

3D Printing Materials & Solutions

Fall 2023

Innovating Additive Manufacturing



Discover one of the largest portfolios of high-performance materials for Additive Manufacturing

At Forward AM, we accompany you from first idea to final printed part. Our portfolio includes materials and solutions for all major Additive Manufacturing technologies - from powders to plastic and metal filaments to photopolymers.

Table of Contents

Powder Bed Fusion

Ultrasint® PP 1400 Black

Ultrasint® AP26

Ultrasint® PA11

Ultrasint® PA11 Black

Ultrasint® PA11 CF

Ultrasint® PA11 rCF

Ultrasint® PA11 ESD

Ultrasint® TPU01

Ultrasint® TPU 88A

Ultrasint® TPU 88A Black

Ultrasint® TPU 90A LT

Photopolymers

Ultracur3D® RG 35

Ultracur3D® RG 1100

Ultracur3D® RG 3280

Ultracur3D® RG 9400 B FR

Ultracur3D® ST 45

Ultracur3D® ST 80

Ultracur3D® ST 1400

Ultracur3D® ST 7500 G

Ultracur3D® FL 300

Ultracur3D® FL 60

Ultracur3D® EL 60

Ultracur3D® EL 150

Ultracur3D® EL 4000

Ultracur3D® DM 2505

Ultracur3D® DM 2304

Ultracur3D® DMD 1005

Ultracur3D® EPD 1006

Ultracur3D® EPD 1086

Ultracur3D® EPD 2006

Ultracur3D® EPD 3500

Ultracur3D® EPD 4006

[Click to jump to page](#)

Fused Filament Fabrication

Ultrafuse® PLA

Ultrafuse® PET

Ultrafuse® ABS

Ultrafuse® PP

Ultrafuse® rPET

Ultrafuse® BVOH

Ultrafuse® HiPS

Ultrafuse® Support Layer

Ultrafuse® PPSU

Ultrafuse® PLA Tough

Ultrafuse® ABS Fusion+

Ultrafuse® ASA

Ultrafuse® PA

Ultrafuse® PC/ABS FR

Ultrafuse® PP GF30

Ultrafuse® PET CF15

Ultrafuse® PAHT CF15

Ultrafuse® PA6 GF 30

Ultrafuse® PC GF 30

Ultrafuse® TPU 85A

Ultrafuse® TPU 64D

Ultrafuse® TPU 95A

Ultrafuse® TPS 90A

Ultrafuse® 316L

Ultrafuse® 17-4PH

Solutions & Services

Ultrasim® 3D Lattice Design

Ultrasim® 3D Lattice Engine


Ultrasim® 3D Simulation (FEA)

Ultrasim® 3D Cost Analysis (TCO)

Ultrasim® 3D Sustainability Analysis

Ultracur3D® Coat F+

[Click to jump to page](#)

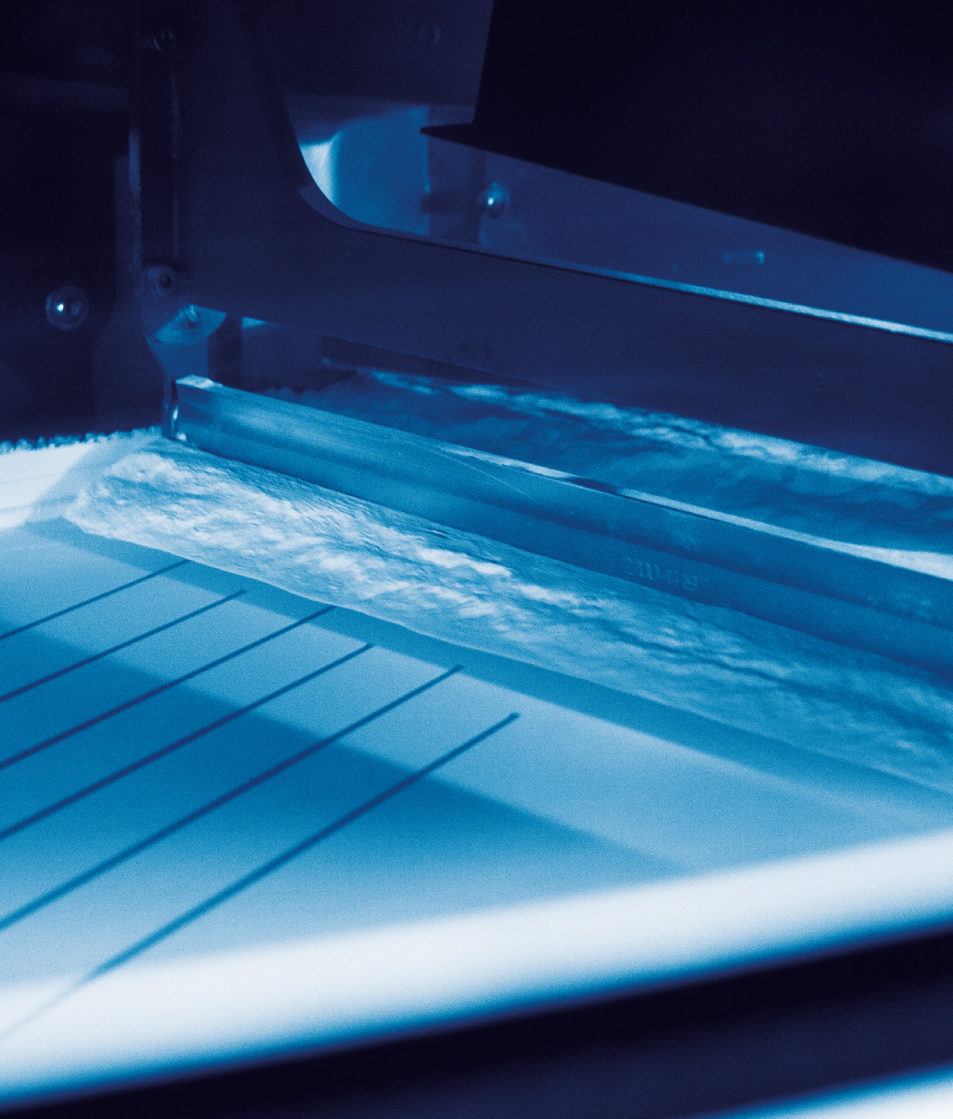

POWDER BED FUSION

Explore the Ultrasint® line of performance polymers that are perfectly adapted to scaled Additive Manufacturing production for any application.

Mechanical Properties Comparison

		PP Line	AP Line	PA11 Line				TPU Line		
		PP 1400 Black	AP26	PA11 (Conditioned)	PA11 Black (Conditioned)	PA11 CF (Conditioned)	PA11 ESD (Conditioned)	TPU01 for HP MUF	TPU 88A	TPU 88A Black
HDT A [°C] ISO 75-2		62	57	76	62	151	111	97 ⁽³⁾	98 ⁽³⁾	101,7 ⁽³⁾
HDT B [°C] ISO 75-2		102	94	176	177	189	186			
Shore A Hardness DIN ISO 7619-1		-	-	-	-	-	-	88-90	88-90	86-88
Tensile Strength [MPa] ISO 527-2 (23 °C)	XY	29	40	45	45	71	55	9	8	8
	ZX	29	30	46	45	48	47	7	7	5
Elongation at Break [%] ISO 527-2 (23 °C)	XY	25	2,5	45	42	11	22	280 ⁽¹⁾	270 ⁽¹⁾	360 ⁽¹⁾
	ZX	25	2,0	31	34	17	31	150 ⁽¹⁾	130 ⁽¹⁾	100 ⁽¹⁾
E Modulus [MPa] ISO 527-2 (23 °C)	XY	1250	2500	1100	1150	4500	2300	85 ⁽²⁾	75 ⁽²⁾	85 ⁽²⁾
	ZX	1300	2500	1250	1200	2000	1500	-	-	-
Charpy Impact Strength (notched) [kJ/m ²] ISO 179-1	XY	4,0	2,2	8,3	11	6,7	7,3	No break	No break	No break
	ZX	4,0	-	4,5	11	4,7	5,3	No break	No break	No break
Charpy Impact Strength (unnotched) [kJ/m ²] ISO 179-1	XY	34	12	198	No break	63	101	-	-	-
	ZX	28	-	85	75	51	107	-	-	-

(1) DIN 53504, S2

(2) ISO 527-2, 1A

(3) Vicat/A (10 N) / °C - DIN EN ISO 306

(4) Izod Test Method A with notched ASTM D256

Printer Compatibility

- Compatible
- Open parameter kit required

		PP Line	AP Line	PA11 Line				TPU Line		
		PP 1400 Black	AP26	PA11	PA11 Black	PA11 CF	PA11 ESD	TPU01 for HP MJF	TPU 88A	TPU 88A Black
HP	5200 Series							■		
Prodways	P1000 / P100X	□	□	□	□	□	□		□	□
3D Systems	Sinterstations / Vanguard / sPro 60	■	■	■	■	■	■		■	■
XYZp	MfgPro230 xS		■	■	■	■	■		■	■
	MfgPro236 xS		■	■	■	■	■		■	■
Farsoon	Flight Series	■			■	■				■
	HT403P / HT/ST25xP	■	■	■	■	■	■		■	■
	SS403P / eForm	■	■	■	■	■	■		■	■
EOS	P1xx		□	□	□				□	□
	P3xx/P7xx			□	□				□	□

Tests & Certification Summary

- Statement Available
- Test in Progress

		PP Line	AP Line	PA11 Line				TPU Line		
		PP 1400 Black	AP26	PA11	PA11 Black	PA11 OF	PA11 ESD	TPU01 for HP MJF	TPU 88A	TPU 88A Black
Product Statements	Skin Contact	■		■				■	■	■
	USP Class IV			■						
	Food Contact			■						
	UL Blue Card							■		
Application Specific Testing	Long Term Heat Aging									
	UV Resistance ISO 4892-2	■		■	■			■	■	■
	Hydrolysis Resistance							■	■	
	Air Tightness / Burst Pressure							■	■	
	Temperature Performance High Temperature Mechanicals	■	■	■		■	■	■	■	

		PP Line	AP Line	PA11 Line				TPU Line		
		PP 1400 Black	AP26	PA11	PA11 Black	PA11 CF	PA11 ESD	TPU01 for HP MJF	TPU 88A	TPU 88A Black
Electrical	Specific Volume Resistivity IEC 62631-3-1	■	■	■	■	■	■	■		
	Specific Surface Resistivity IEC 62631-3-2	■	■	■	■	■	■			
	Dielectric Strength IEC 60234-1	■	■	■	■	■	■	■		
	CTI IEC 60112									
Flame Retardance	Fatigue Rosslflex							■	■	■
	Flammability UL 94	■	□	■	■	■	■	■	■	
	Flammability FMVSS 302							■	■	

Sustainability Summary

- Currently Available
- In Progress

	PP Line	AP Line	PA11 Line				TPU Line		
	PP 1400 Black	AP26	PA11	PA11 Black	PA11 CF	PA11 ESD	TPU01 for HP MJF	TPU 88A	TPU 88A Black
Recyclable	■	■	■	■	■	■	■	■	■
Refresh Rate (Old/New in %) *	60/40	100/0	50/50	50/50	50/50	50/50	80/20	80/20	80/20
Take Back Program			■	■					
Life Cycle Assessment	■		■	■			■	■	■
Carbon Compensation	■						□	□	

*Typical value. The exact refresh rate depends on the machine type and printing technology, processing parameters, material usage intensity, packing density, part geometry and individual part property requirements.

Life Cycle Assessment (LCA): Study that calculates how much environmental impact is associated with every step of a product. The environmental score for these materials is representative of the stages of “Raw material extraction and production” and “Material preparation for 3D printing”.

Carbon Compensation: A strategy to reduce carbon emissions by investing in practices that absorb or mitigate CO2.

Take Back Program: The collection of powder and end parts to reduce plastic waste and promote sustainability.

Refresh Rate: minimum ratio of fresh / virgin powder one needs to add to your pre-used, unsintered powder to maintain its best printing quality.

Post-Processing Summary

■ Compatible

	PP Line	AP Line	PA11 Line				TPU Line		
	PP 1400 Black	AP26	PA11	PA11 Black	PA11 CF	PA11 ESD	TPU01 for HP MJF	TPU 88A	TPU 88A Black
Chemical Smoothing	■	■	■	■	■	■	■	■	■
Ultracur3D® Coat F+			■	■			■	■	■
Dyeing		■	■				■	■	

Materials enabled by BASF

Available through Printer Manufacturers



HP 3D HR PP



Prodways PP 1200



FLEXA Performance
PA11 Onyx
PA11 CF
PA11 ESD

Ultrasint® PP 1400 Black

Technology:

Powder Bed Fusion

Color:

Black

Machine Compatibility:

SLS machines equipped with roller recoater

Farsoon - Prodways - 3D Systems - Alternative laser systems (e.g. diode or fiber lasers)



Easy to Process

Time and cost savings



Isotropic Behaviour

Facilitates data preparation and gives printing flexibility



Chemical Resistance

Ideal for media flow and storage parts



Ultrasint® PP 1400 Black

Suited for:



Transportation



Industrial



Insoles



Automotive

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Technical Specifications

Mechanical properties	Standard	X / Z
Charpy Impact Strength Unnotched (kJ/m ²)	ISO 179-1	34 / 28
E-Modulus (MPa)	ISO 527-2	1250 / 1300
Tensile Strength (MPa)	ISO 527-2	29 / 29
Elongation at Break (%)	ISO 527-2	25 / 25



[Complete TDS](#)

Post-Processing

Chemical Smoothing



Read the whitepaper to learn in detail how to surface treat thermoplastic polymer 3D-printed parts and obtain parts with improved airtightness.

Whitepaper available.

Ultracur3D UV Adhesion Promoter



A solvent-borne UV-Primer to improve the adhesion for rigid 3D-Printing Materials. It is compatible with commercially available topcoats and clearcoats.



Ultrasint® AP26

Technology:

Powder Bed Fusion

Color:

Cream

Machine Compatibility:

SLS machines

Farsoon - Prodways - 3D Systems - EOS



**Reusability of
100%**

*Zero waste of material -
Eco Friendly*



**High Detail
Resolution**



**Insulating
Properties**

*Suited for electric and
electronic components*



Easy to Process

Time and cost savings

Ultrasint® AP26

Suited for:



Models



Electronics

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	X / Z
Charpy Impact Strength Unnotched (kJ/m ²)	ISO 179-1	12 / n.a
E-Modulus (MPa)	ISO 527-2	2500/ 2500
Tensile Strength (MPa)	ISO 527-2	40 / 30
Elongation at Break (%)	ISO 527-2	2.5 / 2



Complete TDS

Tests & Certifications

Dielectric Strength	Electrical Volume & Surface Resistivity
IEC 60234-1	IEC 62631-3-1 IEC 62631-3-2

Post-Processing

Chemical Smoothing



Both mechanical and chemical smoothing will improve material performance while enhancing the appeal, durability, surface roughness and overall quality.

Ultrasint® PA11



Technology:

Powder Bed Fusion

Color:

White/Black

Machine Compatibility:

SLS machines

EOS - Farsoon - Prodways - 3D Systems - XYZprinting



High Toughness

Able to withstand high mechanical loads and not splinter



Bio-sourced

Bio-derived from sustainable castor oil



High Elongation at Break

Elongation at Break up to 45%

Ultrasint® PA11

Suited for:



Medical
Applications



Industrial



Consumer
Goods



Automotive

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Technical Specifications

Mechanical properties	Standard	X / Z
Charpy Impact Strength Unnotched (kJ/m ²)	ISO 179-1	198 / 85
E-Modulus (MPa)	ISO 527-2	1100 / 1250
Tensile Strength (MPa)	ISO 527-2	45 / 46
Elongation at Break (%)	ISO 527-2	45/31



[Complete TDS](#)

Tests & Certifications

[Skin Contact /](#)

[Biocompatibility](#)

[Food Contact](#)

ISO 10993-10
ISO 10993-5
USP Class IV

Statement Available

Post-Processing

Chemical Smoothing



Both mechanical and chemical smoothing will improve material performance while enhancing the appeal, durability, surface roughness and overall quality.

Ultracur3D® Coat F+




The Forward AM Ultracur3D® Coat F+ is a flexible waterborn 2k-basecoat designed to offer exceptional flexibility for 3D Printing Materials and enables new possibilities for advanced applications.

Dyeing



Liquid dyeing ensures that color evenly reaches all surfaces of the parts including small cavities, lattices, and hollowed parts.

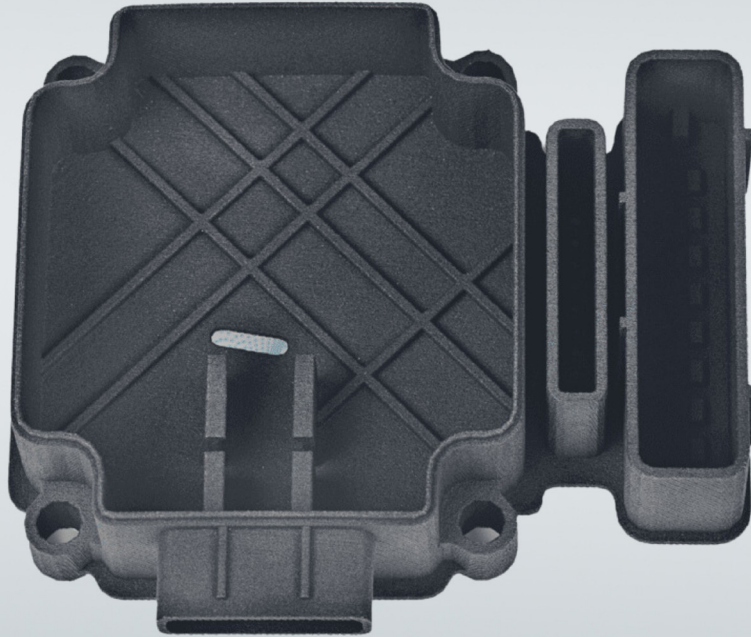

Ultrasint® PA11 Black

Technology:

Powder Bed Fusion

Color:

White/Black

Machine Compatibility:

SLS machines

EOS - Farsoon - Prodways - 3D Systems - XYZprinting



High Toughness

Able to withstand high mechanical loads and not splinter



Bio-sourced

Bio-derived from sustainable castor oil



High Elongation at Break

Elongation at Break up to 45%

Ultrasint® PA11 Black

Suited for:



Medical
Applications



Industrial



Consumer
Goods



Automotive

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Technical Specifications

Mechanical properties	Standard	X / Z
Charpy Impact Strength Unnotched (kJ/m ²)	ISO 179-1	no break / 75
E-Modulus (MPa)	ISO 527-2	1150 / 1200
Tensile Strength (MPa)	ISO 527-2	28 / 26
Elongation at Break (%)	ISO 527-2	42 / 34



[Complete TDS](#)

Post-Processing

Chemical Smoothing



Both mechanical and chemical smoothing will improve material performance while enhancing the appeal, durability, surface roughness and overall quality.

Ultracur3D® Coat F+



The Forward AM Ultracur3D® Coat F+ is a flexible waterborn 2k-basecoat designed to offer exceptional flexibility for 3D Printing Materials and enables new possibilities for advanced applications.

Ultrasint® PA11 CF

Carbon Fiber



Technology:

Powder Bed Fusion

Color:

Black

Machine Compatibility:

SLS machines

Farsoon - Prodways - 3D Systems



Carbon-Fiber Reinforced

Excellent for high strength and rigidity applications



High impact resistance

Charpy impact unnotched up to 63 kJ/m², good option to replace metal parts



High Strength to Weight Ratio

Key for lightweight structures

Ultrasint® PA11 CF

Suited for:



Manufacturing



Industrial



Consumer Goods



Automotive

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Technical Specifications

Mechanical properties	Standard	X / Z
Charpy Impact Strength Unnotched (kJ/m ²)	ISO 179-1	63 / 45
E-Modulus (MPa)	ISO 527-2	4550 / 1700
Tensile Strength (MPa)	ISO 527-2	71 / 37
Elongation at Break (%)	ISO 527-2	11 / 5.2



Complete TDS

Tests & Certifications

Bio-sourced

Bio-derived from sustainable castor oil

Thermal Performance

Good heat-ageing performance

Post-Processing

Chemical Smoothing



Both mechanical and chemical smoothing will improve material performance while enhancing the appeal, durability, surface roughness and overall quality.

Ultracur3D® Coat F+



The Forward AM Ultracur3D® Coat F+ is a flexible waterborn 2k-basecoat designed to offer exceptional flexibility for 3D Printing Materials and enables new possibilities for advanced applications.



Ultrasint® PA11 rCF

Carbon Fiber

Technology:

Powder Bed Fusion

Color:

Black

Machine Compatibility:

SLS machines

Farsoon - Prodways - 3D Systems



Carbon-Fiber Reinforced

Excellent for high strength and rigidity applications



High impact resistance

Charpy impact unnotched up to 63 kJ/m², good option to replace metal parts



High Strength to Weight Ratio

Key for lightweight structures



Recycled Carbon Fiber

Ultrasint® PA11 rCF

Suited for:



Manufacturing



Industrial



Consumer
Goods



Automotive

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Technical Specifications

Mechanical properties	Standard	X / Z
E-Modulus (MPa)	ISO 527-2	4300 / 1750
Tensile Strength (MPa)	ISO 527-2	69 / 42
Elongation at Break (%)	ISO 527-2	10 / 9



Complete TDS

Post-Processing

Chemical Smoothing




Both mechanical and chemical smoothing will improve material performance while enhancing the appeal, durability, surface roughness and overall quality.

Ultracur3D® Coat F+



The Forward AM Ultracur3D® Coat F+ is a flexible waterborn 2k-basecoat designed to offer exceptional flexibility for 3D Printing Materials and enables new possibilities for advanced applications.

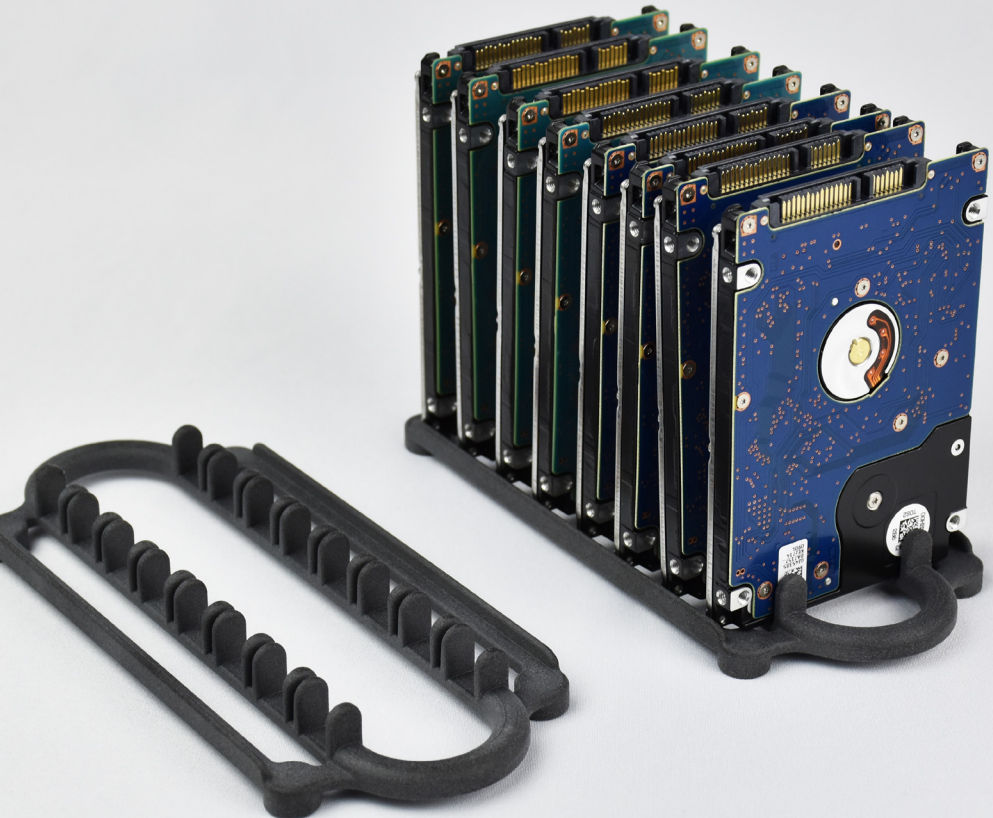

Ultrasint® PA11 ESD

Electrostatic Safety Discharge

Technology:

Powder Bed Fusion

Color:

Gray

Machine Compatibility:

SLS machines
Farsoon - Prodays - 3D Systems



High Toughness

Able to withstand high mechanical loads and not splinter



Electrostatic Safety Discharge

Reduces the risk of electrostatically induced damage or failure



Bio-sourced

Bio-derived from sustainable castor oil

Ultrasint® PA11 ESD

Suited for:



Electronics



Industrial



Robotics



Automotive

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	X / Z
Charpy Impact Strength Unnotched (kJ/m ²)	ISO 179-1	101 / 107
E-Modulus (MPa)	ISO 527-2	2300 / 1550
Tensile Strength (MPa)	ISO 527-2	55 / 47
Elongation at Break (%)	ISO 527-2	22 / 31



[Complete TDS](#)

Tests & Certifications

Electrical Volume & Surface Resistivity

IEC 62631-3-1
IEC 62631-3-2

Thermal Performance

Good heat-ageing performance

Post-Processing

Chemical Smoothing



Both mechanical and chemical smoothing will improve material performance while enhancing the appeal, durability, surface roughness and overall quality.

Ultracur3D® Coat F+



The Forward AM Ultracur3D® Coat F+ is a flexible waterborn 2k-basecoat designed to offer exceptional flexibility for 3D Printing Materials and enables new possibilities for advanced applications.



Ultrasint® TPU01

Technology:

Powder Bed Fusion

Color:

Gray

Machine Compatibility:

MJF Machines

HP Jet Fusion 5200 Series



Highly flexible

Shore A 88 hardness



High Reusability

*Up to 80% of powder
reusability*



Lattice Structures

*Enabled by
BASF Ultrasim®*

Ultrasint® TPU01

Suited for:



Footwear



Industrial



Sports



Automotive



Medical Applications

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Technical Specifications

Mechanical properties	Standard	X / Z
Charpy Impact Strength Notched -10°C (kJ/m ²)	ISO 179-1	46 / 44
E-Modulus (MPa)	ISO 527-2, 1A	85 / 85
Tensile Strength (MPa)	DIN 53504, S2	9 / 7
Elongation at Break (%)	DIN 53504, S2	280 / 150



Complete TDS

Tests & Certifications

Skin Contact

ISO 10993-10

& ISO 10993-5

UV Stability

ISO 4892-2B Cycle 3

ISO 4892-2A Cycle 1

Post-Processing and Related Services

Chemical Smoothing



Both mechanical and chemical smoothing will improve material performance while enhancing the appeal, durability, surface roughness and overall quality.


Whitepaper available.

Ultracur3D® Coat F+



Flexible waterborn 2k-basecoat designed to offer exceptional flexibility for elastic 3D Printing Materials and enables new possibilities for advanced applications.

Ultrasim® 3D Lattice Design



Lattice engineering unlocks the potential of high-performance materials for any application. Customized lattices can be engineered to specific mechanical properties.

Ultrasint® TPU 88A



Technology:

Powder Bed Fusion

Color:

White

Machine Compatibility:

All SLS machines

Farsoon - EOS - 3D Systems - XYZprinting



High Reusability

*Up to 80% of powder
reusability*



**Excellent
Surface Quality
and High Level
of Detail**



Highly flexible

Shore A 88 hardness

Ultrasint® TPU 88A

Suited for:



Footwear



Industrial



Sports



Automotive



Medical Applications

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Technical Specifications

Mechanical properties	Standard	X / Z
Charpy Impact Strength Notched -10°C (kJ/m²)	DIN EN ISO 179-1	60 / 58
E-Modulus (MPa)	ISO 527-2, 1A	75 / 75
Tensile Strength (MPa)	DIN 53504, S2	8 / 7
Elongation at Break (%)	DIN 53504, S2	270 / 130



Complete TDS

Tests & Certifications

Skin Contact	UV Stability
ISO 10993-10 & ISO 10993-5	ISO 4892-2B Cycle 3 ISO 4892-2A Cycle 1

Post-Processing and Related Services

Chemical Smoothing



Both mechanical and chemical smoothing will improve material performance while enhancing the appeal, durability, surface roughness and overall quality.

Ultracur3D® Coat F+




The Forward AM Ultracur3D® Coat F+ is a flexible waterborn 2k-basecoat designed to offer exceptional flexibility for 3D Printing Materials and enables new possibilities for advanced applications.

Dyeing



Liquid dyeing ensures that color evenly reaches all surfaces of the parts including small cavities, lattices, and hollowed parts.

Ultrasim® 3D Lattice Design



Lattice engineering unlocks the potential of high-performance materials for any application. Customized lattices can be engineered to specific mechanical properties.

Ultrasint® TPU 88A Black

Technology:


Powder Bed Fusion

Color:

Black

Machine Compatibility:

SLS machines including Desktop Machines
EOS - Farsoon - XYZprinting - 3D Systems

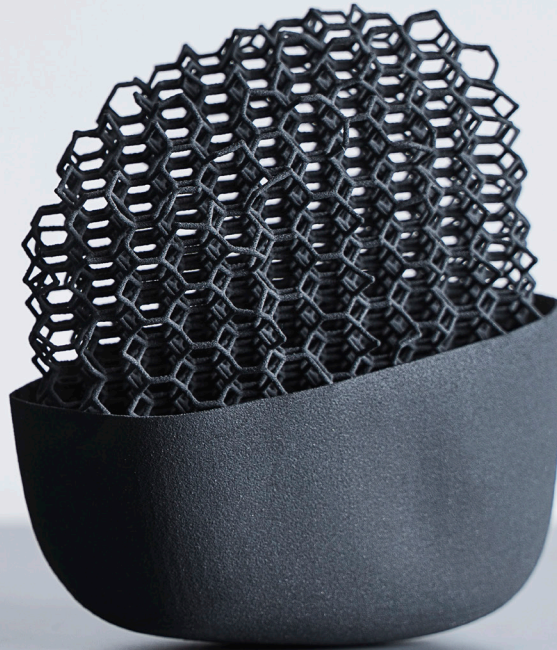

**Suitable for
Desktop
Machines**



High Reusability
*Up to 80% of powder
reusability*



**High Elasticity
and Rebound**

Elongation at Break
- up to 360%

Ultrasint® TPU 88A Black

Suited for:



Footwear



Industrial



Sports



Automotive



Medical
Applications

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	X / Z
Charpy Impact Strength Notched -30°C (kJ/m ²)	DIN EN ISO 179-1	No break / No break
E-Modulus (MPa)	ISO 527-2, 1A	85/85
Tensile Strength (MPa)	DIN 53504, S2	8/5
Elongation at Break (%)	DIN 53504, S2	360/100



[Complete TDS](#)

Tests & Certifications

UV Stability

ISO 4892-2A Cycle 1

Skin Contact

ISO 10993-10
& ISO 10993-5

Post-Processing

Chemical Smoothing



Read the whitepaper to learn in detail how to surface treat thermoplastic polymer 3D-printed parts and obtain parts with improved airtightness.

[Whitepaper available.](#)

Ultrasur3D® Coat F+



Flexible waterborn 2k-basecoat designed to offer exceptional flexibility for elastic 3D Printing Materials and enables new possibilities for advanced applications.



Ultrasint® TPU 90A LT

Technology:

Powder Bed Fusion

Color:

White

Machine Compatibility:

All SLS machines

Farsoon - EOS - 3D Systems - XYZprinting



Lightweight



High Rebound



Highly flexible

Ultrasint® TPU 90A LT

Suited for:



Footwear



Industrial



Sports



Automotive



Medical
Applications

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Technical Specifications

Mechanical properties	Standard	X / Z
Tensile Modulus (MPa)	ISO 527-2, 1A	110
Energy Return (%)	DIN 53512	66
Density (g/kg)	DIN EN ISO 1183-1	1.05
Elongation at Break (%)	DIN 53504, S2	300



Complete TDS

Tests & Certifications

Cytotoxicity

Passed

Post-Processing and Related Services

Chemical Smoothing



Both mechanical and chemical smoothing will improve material performance while enhancing the appeal, durability, surface roughness and overall quality.

Ultracur3D® Coat F+




The Forward AM Ultracur3D® Coat F+ is a flexible waterborn 2k-basecoat designed to offer exceptional flexibility for 3D Printing Materials and enables new possibilities for advanced applications.

Dyeing



Liquid dyeing ensures that color evenly reaches all surfaces of the parts including small cavities, lattices, and hollowed parts.

Ultrasim® 3D Lattice Design



Lattice engineering unlocks the potential of high-performance materials for any application. Customized lattices can be engineered to specific mechanical properties.



PHOTOPOLYMERS

Discover the wide range of
Ultracur3D® reactive urethane
photopolymers delivering class-
leading performance and consistency
to meet your specific application
needs.

Mechanical Properties Comparison

	Tough Line				Rigid Line				Dental Line		
	ST 45	ST 80	ST 1400	ST 7500 G	RG 35	RG 1100	RG 3280*	RG 9400 B FR	DM 2505	DM 2304	DMD 1005
E Modulus [MPa] ASTM D638	2300	1500	1900	2300	2600	3080	10 600	3940	2200	-	2710
Tensile Strength [MPa] ASTM D638	60	35	45	54	80	70	87	79	48	4 ⁽¹⁾	60
Elongation at Break [%] ASTM D638	25	20	43	13	6	5	1.3	2.8	4	160	4
Flexural Modulus [MPa] ASTM D790	2400	1700	1540	2150	2400	2880	8780	3400	2150	-	2400
Flexural Strength [MPa] ASTM D790	110	60	80	95	110	119	73	115	83	-	85
Impact Strength Izod Notched [J/m] ASTM D256	30	24	43	25	23	16	24		15	-	1.6
Hardness ASTM D2240	80 D	80 D	78 D	82 D	85 D	85 D	96 D	88 D	73 D	50 A	80 D
HDT (0.45 MPa) [°C] ASTM D648	73	46	57	64	83	116	284	260	69	-	93
HDT (1.85 MPa) [°C] ASTM D648	61	42	48	54	64	84	132	84	55	-	73
Flammability UL 94 1.5 mm	HB	-	-	-	HB	HB		V-0 ⁽³⁾	-	-	-
Viscosity - 30 °C [mPas] Cone/Plate Rheometer	210	400	280	130	600	200	230	450	80	160	110
Tear Strength - Graves [N/mm] ASTM D624 type C	-	-	-	-	-	-	-	-	-	-	-
Rebound Resilience [%] ASTM D1054	-	-	-	-	-	-	-	-	-	-	-

* Mechanical properties with regular UV post-curing and additional thermal post-curing available

Flexible / Elastomeric Line					Engineering Plastic Daylight Line				
FL 300	FL 60	EL 60	EL 150	EL 4000	EPD 1006	EPD 1086	EPD 2006	EPD 3500	EPD 4006
-	-	-	-	-	1500	1810	2370	2500	1800
5 ⁽¹⁾	4 ⁽¹⁾	9 ⁽¹⁾	7 ⁽¹⁾	11 ⁽¹⁾	40	42	50	60	45
245	90	95	182	170	25	26	10	18	45
-	-	-	-	-	1460	1620	2210	2400	1600
-	-	-	-	-	52	67	90	110	70
-	-	-	-	-	35	28	11	25	46
40 A	60 A	75 A	80 A	90 A	79 D	81 D	80 D	79 D	78 D
-	-	-	-	-	44	53	81	70	54
-	-	-	-	-	40	46	61	57	43
-	-	-	-	-	HB	HB	HB	-	HB ⁽²⁾
160	400	3400	90	350	1033	450	310	600	300
9	9	18	14	37	-	-	-	-	-
16	11 ⁽²⁾	21 ⁽²⁾	28	30 ⁽²⁾	-	-	-	-	-

(1) ASTM D412 C

(2) ASTM D7121

(3) UL 94 3 mm

- Validated by Forward AM
- Validated by machine manufacturer
- Preliminary

		Tough Line									Rigid Line					Dental Line		Flexible / Elastomeric Line						
		ST 45	ST 45 M	ST 45 B	ST 80	ST 80 B	ST 80 G	ST 80 W	ST 1400	ST 7500 G	RG 35	RG 35 B	RG 1100	RG 1100 B	RG 3280	DM 2505	DM 2304	FL 300	FL 60	EL 60	EL 150	EL 4000	EL 4000 B	
Nexa3D®	NXE 200 , NXE 400	■	■	■							■	■	□	□	■	■								
	XiP	■	■									■			■									
Photocentric®	LC Opus		■	■	■				■		■		■			■			■				■	
Phrozen®	Sonic Mini, Sonic Mini 4K , Sonic Mini 8K , Sonic Mighty 8K , Sonic Mega 8K	■	■	■	■	■			■		■	■	■	■	■	■	■		■					■
Prusa®	Original Prusa SL1	■	■	■	■		■	■			■													
	Original Prusa SL1S	□	□		□	□			□		□							□			□			
RapidShape®	i30+	■			■			■	■	■	■		■	■	■	■				■	■	■		
	i50+	■		■	■						□		■	■	■					■	■			
	i100+												■	■	■									
Shining 3D®	AccuFab-L4K	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■		■		■	■	■	■
Stratasys®	Origin® One	■		■	■					■		■	■	■	■	■		■		■	■	■		■
UnionTech®	Cute 300	□		■	□					□		■		■	□	□	□	□	■	□	■	□		□
	Pi 200														□	□								
Zortrax®	Inkspire 2	■		■	■	■	■		□	■	■	■	■	■					■	■	■	■		



Ultracur3D® RG 35

Rigid Line

Technology:

LCD (incl. MSLA) & DLP

Color:

Clear & Black



Very high
stiffness & high
temperature
resistance



High accuracy
and low
shrinkage



Low water
uptake



Easy to polish

Ultracur3D® RG 35

Suited for:



Automotive
housings



Jigs and
fixtures



Molds and
inserts



Electrical
castings

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638	2600
Tensile Strength (MPa)	ASTM D638	80
Heat Deflection Temperature (°C)	ASTM D648	83
Hardness (Shore D)	ASTM D2240	85



Complete TDS

Tests & Certifications

Flammability	Skin Contact	UV Stability	Sterilization	Chemical Resistance
UL 94 1.5mm	ISO 10993-5; ISO 10993-10; ISO 10993-11	ISO 4892-2A Cycle 1	Dataset available	Dataset available

Complementary Products

Ultracur3D® Cleaner




Cleaning solution for removal of any uncured photopolymer resin from printed parts

Ultracur3D® Color Kit



Color kit solution enabling parts in a wide range of colors without the need for post-processing


Ultracur3D® Coat F+



Flexible coating solution to improve part properties and appearance

Ultracur3D® RG 1100

Rigid Line

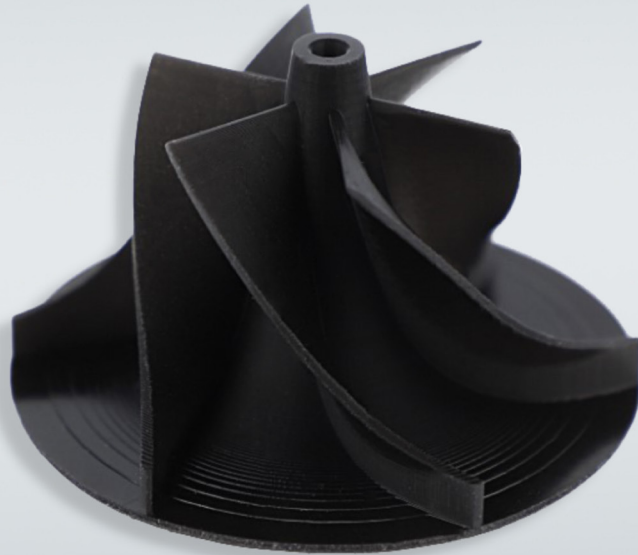

Technology:

LCD (incl. MSLA) & DLP

Color:

Clear & Black



Very high
stiffness



Impressive
all-round
temperature
resistance



Very high
chemical
resistance and
low water uptake

Ultracur3D® RG 1100

Suited for:



Automotive
connectors



Engineering
parts



Brackets and
housings

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638	3080
Tensile Strength (MPa)	ASTM D638	70
Heat Deflection Temperature (°C)	ASTM D648	116
Water Absorption, 24h (%)	ASTM D570	0.32



[Complete TDS](#)

Tests & Certifications

Flammability	UV Stability	Sterilization	Chemical Resistance
UL 94 1.5 mm	ISO 4892-2A Cycle 1	Dataset available	Dataset available

Complementary Products

Ultracur3D® Cleaner



Cleaning solution for removal of any uncured photopolymer resin from printed parts


Ultracur3D® Color Kit



Color kit solution enabling parts in a wide range of colors without the need for post-processing

Ultracur3D® RG 3280

Rigid Line

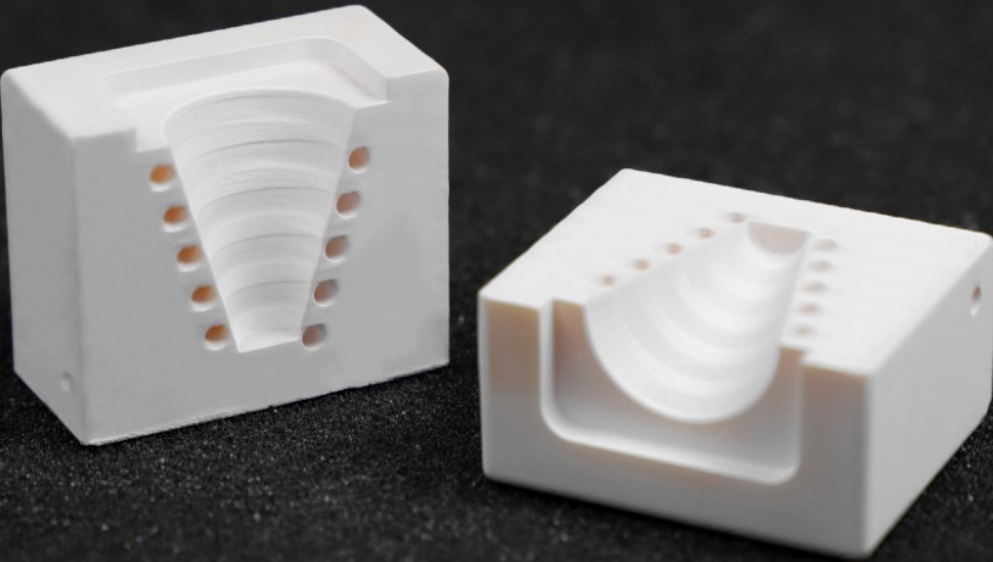

Technology:

LCD (incl. MSLA) & DLP

Color:

White, ceramic-like



Superior
stiffness



Superior
temperature
performance



Fast and easy to
print



High suspension
stability

Ultracur3D® RG 3280

Suited for:



Tooling



Molding

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638	10 600
Tensile Strength (MPa)	ASTM D638	87
Heat Deflection Temperature (°C)	ASTM D648	284
Viscosity, 30°C (mPas)	Cone/Plate Rheometer	230



[Complete TDS](#)

Tests & Certifications

Chemical Resistance

Dataset available

Ultracur3D® RG 9400 B FR

Rigid Line



Technology:

LOD (incl. MSLA) & DLP

Color:

Black



UL94 V0 flame
retardancy



Superior
temperature
performance



Easy to print and
process



Halogen Free

Ultracur3D® RG 9400 B FR

Suited for:



Electronics



Housings

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Technical Specifications

Mechanical properties	Standard	Value
Flammability	UL 94 (3mm)	V-0
Heat Deflection Temperature (°C)	ASTM D648	260
Young's Modulus (MPa)	ASTM D638	3940
Viscosity, 30°C (mPas)	Cone/Plate Rheometer	450



[Complete TDS](#)

Tests & Certifications

Flammability

UL 94 (V0 at 3mm)


Complementary Products

Ultracur3D® Cleaner



Cleaning solution for removal of any uncured photopolymer resin from printed parts

Ultracur3D® Coat F+



Flexible coating solution to improve part properties and appearance

Ultracur3D® ST 45

Tough Line

Technology:

LCD (incl. MSLA) & DLP

Color:

Clear & Black



High strength,
toughness
and impact
resistance



Very fast printing
and great
surface finishing



Lower curing
depth for higher
z-resolution (for
ST 45 M)

Ultracur3D® ST 45

Suited for:



Housings



Prototyping



High detail & textured parts



Customized gadgets and tools

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638	2300
Tensile Strength (MPa)	ASTM D638	60
Heat Deflection Temperature (°C)	ASTM D648	73
Hardness (Shore D)	ASTM D2240	80



[Complete TDS](#)

Tests & Certifications

Flammability	Skin Contact	UV Stability	Sterilization	Chemical Resistance
UL 94 1.5 mm	ISO 10993-5; ISO 10993-10	ISO 4892-2B Cycle 1	Dataset available	Dataset available

Complementary Products

Ultracur3D® Cleaner




Cleaning solution for removal of any uncured photopolymer resin from printed parts

Ultracur3D® Color Kit



Color kit solution enabling parts in a wide range of colors without the need for post-processing

Ultracur3D® Coat F+



Flexible coating solution to improve part properties and appearance

Ultracur3D® ST 80

Tough Line



Technology:

LCD (incl. MSLA) & DLP

Color:

Clear, Black, White, &
Grey



Well-balanced
multi-purpose
material



High toughness
and impact
resistance



Most cost-
effective solution



UV stability

Ultracur3D® ST 80

Suited for:



Electrical castings



Orthopedics



High detail & textured parts



Consumer goods and tools

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638	1500
Impact Strength, Notched Izod, 23°C (J/m)	ASTM D256	24
Elongation at Break (%)	ASTM D638	20
Hardness (Shore D)	ASTM D2240	80



Complete TDS

Tests & Certifications

Skin Contact	UV Stability	Sterilization	Chemical Resistance
ISO 10993-5; ISO 10993-10	ISO 4892-2A Cycle 1	Dataset available	Dataset available

Complementary Products

Ultracur3D® Cleaner



Cleaning solution for removal of any uncured photopolymer resin from printed parts

Ultracur3D® Color Kit



Color kit solution enabling parts in a wide range of colors without the need for post-processing

Ultracur3D® ST 1400

Tough Line

Technology:

LCD (incl. MSLA) & DLP

Color:

Clear



Outstanding
toughness
and impact
resistance



Bridge between
flexible and rigid
materials



Low viscosity
and fast printing

Ultracur3D® ST 1400

Suited for:



Housings



Prototyping



Orthopedics



Medical applications

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value
Water Absorption, 24h (%)	ASTM D570	0.33
Impact Strength, Notched Izod, 23°C (J/m)	ASTM D256	43
Elongation at Break (%)	ASTM D638	43
Young's modulus (MPa)	ASTM D638	1900



[Complete TDS](#)

Tests & Certifications

Skin Contact	UV Stability	Sterilization
ISO 10993-5 ISO 10993-10	ISO 4892-2A Cycle 1	Dataset available

Complementary Products

Ultracur3D® Cleaner



Cleaning solution for removal of any uncured photopolymer resin from printed parts

Ultracur3D® Color Kit



Color kit solution enabling parts in a wide range of colors without the need for post-processing

Ultracur3D® ST 7500 G

Tough Line

Technology:

LOD (incl. MSLA) & DLP

Color:

Grey



Surface quality
and details



Durability and
toughness



Fast and easy
printing



Ultracur3D® ST 7500 G

Suited for:



Figurines



Functional
Prototypes

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638	2300
Elongation at Break (%)	ASTM D638	13
Water Absorption, 24h (%)	ASTM D570	0.9
Viscosity, 30°C (mPas)	Cone/Plate Rheometer	130



[Complete TDS](#)

Tests & Certifications

UV Stability	Skin Contact	Chemical Resistance
ISO 4892-2A Cycle 1	ISO 10993-5	Dataset available

Complementary Products

Ultracur3D® Cleaner



Cleaning solution for removal of any uncured photopolymer resin from printed parts

Ultracur3D® FL 300

Flexible / Elastomeric Line

Technology:

LCD (incl. MSLA) & DLP

Color:

Clear



**Very low
hardness**
(Shore 40 A)



**Superior
elongation at
break**

Ultracur3D® FL 300

Suited for:



Footwear



Prototyping



Energy damping



Cushioning pads



Flexible grips

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value
Rebound Resilience (%)	ASTM D1054	16
Tear Strength, Graves (N/mm)	ASTM D624 type C	9
Elongation at Break (%)	ASTM D412 C	245
Hardness (Shore A)	ASTM D2240	40



[Complete TDS](#)

Tests & Certifications

Skin Contact	Chemical Resistance	UV Stability
ISO 10993-10	Dataset available	ISO 4892-2A Cycle 1

Complementary Products

Ultracur3D® Cleaner



Cleaning solution for removal of any uncured photopolymer resin from printed parts

Ultracur3D® Color Kit



Color kit solution enabling parts in a wide range of colors without the need for post-processing

Ultracur3D® Coat F+



Flexible coating solution to improve part properties and appearance

Ultracur3D® FL 60

Flexible / Elastomeric Line

Technology:

LCD (incl. MSLA) & DLP

Color:

Clear



Very low
hardness
(Shore 60 A)



Very good
haptics



Very stable
clear-white color



Ultracur3D® FL 60

Suited for:



Footwear



Functional prototyping



Flexible grips



Cushioning pads

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value
Rebound Resilience (%)	ASTM D7121	11
Tear Strength, Graves (N/mm)	ASTM D624 type C	9
Elongation at Break (%)	ASTM D412 C	90
Hardness (Shore A)	ASTM D2240	60



[Complete TDS](#)

Tests & Certifications

Sterilization	UV Stability
Dataset available	ISO 4892-2A Cycle 1

Complementary Products

Ultracur3D® Cleaner




Cleaning solution for removal of any uncured photopolymer resin from printed parts

Ultracur3D® Color Kit



Color kit solution enabling parts in a wide range of colors without the need for post-processing

Ultracur3D® Coat F+



Flexible coating solution to improve part properties and appearance

Ultracur3D® EL 60

Flexible / Elastomeric Line

Technology:

LCD (incl. MSLA) & DLP

Color:

Clear



Low hardness
(Shore 75 A)



**Quick elastic
response**



Easy to print



Ultracur3D® EL 60

Suited for:



Footwear



Functional prototyping



Flexible grips



Cushioning pads

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value
Rebound Resilience (%)	ASTM D7121	21
Elongation at Break (%)	ASTM D412 C	95
Water Absorption, 24h (%)	ASTM D570	0.60
Hardness (Shore A)	ASTM D2240	75



[Complete TDS](#)

Tests & Certifications

Sterilization	Skin Contact	Rossflex	Chemical Resistance
Dataset available	ISO 10993-5; 10993-10	ASTM D1052	Dataset available

Complementary Products

Ultracur3D® Cleaner




Cleaning solution for removal of any uncured photopolymer resin from printed parts

Ultracur3D® Color Kit



Color kit solution enabling parts in a wide range of colors without the need for post-processing

Ultracur3D® Coat F+



Flexible coating solution to improve part properties and appearance



Ultracur3D® EL 150

Flexible / Elastomeric Line

Technology:

LCD (incl. MSLA) & DLP

Color:

Clear



**Medium
Hardness**
(Shore 80 A)



Optimum
combination of
high strength,
elongation
at break and
rebound

Ultracur3D® EL 150

Suited for:



Footwear



Prototyping



Flexible grips



Cushioning pads

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value
Rebound Resilience (%)	ASTM D1054	28
Tear Strength, Graves (N/mm)	ASTM D624 type C	14
Elongation at Break (%)	ASTM D412 C	182
Hardness (Shore A)	ASTM D2240	80



[Complete TDS](#)

Tests & Certifications

Rosflex	Skin Contact	UV Stability	Chemical Resistance
ASTM D1052	ISO 10993-10	ISO 4892-2A Cycle 1	Dataset available

Complementary Products

Ultracur3D® Cleaner




Cleaning solution for removal of any uncured photopolymer resin from printed parts

Ultracur3D® Color Kit



Color kit solution enabling parts in a wide range of colors without the need for post-processing

Ultracur3D® Coat F+



Flexible coating solution to improve part properties and appearance

Ultracur3D® EL 4000

Flexible / Elastomeric Line

Technology:

LCD (incl. MSLA) & DLP

Color:

Clear & Black



High hardness
(Shore 90 A)



**Ideal for printing
intricate flexible
parts**



**Superior
strength,
rebound and
tear resistance**



Ultracur3D® EL 4000

Suited for:



Footwear



Bike saddle



Cushioning pads

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Technical Specifications

Mechanical properties	Standard	Value
Elongation at Break (%)	ASTM D412 C	170
Hardness (Shore A)	ASTM D2240	90
Rebound Resilience (%)	ASTM D7121	30
Tear Strength, Graves (N/mm)	ASTM D624 type C	37



[Complete TDS](#)

Tests & Certifications

UV Stability	Chemical Resistance	Skin Contact
ISO 4892-2A Cycle 1	Dataset available	ISO 10993-5

Complementary Products

Ultracur3D® Cleaner



Cleaning solution for removal of any uncured photopolymer resin from printed parts

Ultracur3D® Color Kit



Color kit solution enabling parts in a wide range of colors without the need for post-processing

Ultracur3D® DM 2505

Dental Line

Technology:

LOD (incl. MSLA) & DLP

Color:

Beige



Precise
manufacturing
of dental models
and molds



Ideal for
thermoforming



Parts can be
washed with
water



Ultracur3D® DM 2505

Suited for:



Dental
models and
molds

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638	2200
Tensile Strength (MPa)	ASTM D638	48
Viscosity, 30°C (mPas)	Cone/Plate Rheometer	80
Hardness (Shore D)	ASTM D2240	73



[Complete TDS](#)

Tests & Certifications

Accuracy

High printing and
thermoforming accuracy

Complementary Products

Ultracur3D® Cleaner



Cleaning solution
for removal of
any uncured
photopolymer
resin from printed
parts

Ultracur3D® DM 2304

Dental Line



Technology:

LCD (incl. MSLA) & DLP

Color:

Pink



Optimized
for producing
gingiva masks



Highly flexible
and very soft

Ultracur3D® DM 2304

Suited for:



Gingiva mask

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value
Elongation at Break (%)	ASTM D412 C	160
Tensile Strength (MPa)	ASTM D412 C	4
Viscosity, 30°C (mPas)	Cone/Plate Rheometer	160
Hardness (Shore A)	ASTM D2240	50



[Complete TDS](#)

Tests & Certifications

Accuracy

High printing and thermofforming accuracy

Complementary Products

Ultracur3D® Cleaner



Cleaning solution for removal of any uncured photopolymer resin from printed parts

Ultracur3D® DMD 1005

Dental Line



Technology:

LOD Photocentric

Color:

Beige



Ideal for
economic and
large-scale
production



Suitable for
thermoforming



Good printing
accuracy

Ultracur3D® DMD 1005

Suited for:



Dental
models and
molds

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638	2710
Tensile Strength (MPa)	ASTM D638	60
Heat Deflection Temperature (°C)	ASTM D648	93
Hardness (Shore D)	ASTM D2240	80



[Complete TDS](#)

Tests & Certifications

Accuracy

High printing and
thermoforming accuracy

Complementary Products

Ultracur3D® Cleaner



Cleaning solution
for removal of
any uncured
photopolymer
resin from printed
parts



Ultracur3D® EPD 1006

Daylight Line

Technology:

LOD Photocentric

Color:

Black



Good toughness
and impact
resistance



Easy to print,
nice surface
finish & intricate
geometries



Ideal for
prototyping, jigs
and fixtures

Ultracur3D® EPD 1006

Suited for:



Prototyping



Jigs and fixtures



Customized gadgets and tools



High detail and textured parts

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638	1500
Tensile Strength (MPa)	ASTM D638	40
Elongation at Break (%)	ASTM D638	25
Impact Strength, Notched Izod, 23°C (J/m)	ASTM D256	35



[Complete TDS](#)

Tests & Certifications

Flammability	Skin Contact
UL 94 1.5 mm	ISO 10993-5

Complementary Products

Ultracur3D® Cleaner



Cleaning solution for removal of any uncured photopolymer resin from printed parts

Ultracur3D® EPD 1086

Daylight Line



Technology:

LOD Photocentric

Color:

Black



Well-balanced
mechanical
properties



Cost-effective
solution for a
wide range of
applications

Ultracur3D® EPD 1086

Suited for:



High detail
and textured
parts



Customized
gadgets and
tools

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638	1810
Tensile Strength (MPa)	ASTM D638	42
Elongation at Break (%)	ASTM D638	26
Hardness (Shore D)	ASTM D2240	81



[Complete TDS](#)

Tests & Certifications

Flammability	UV Stability	Chemical Resistance
UL 94 1.5 mm	ISO 4892-2A Cycle 1	Dataset available

Complementary Products

Ultracur3D® Cleaner



Cleaning solution
for removal of
any uncured
photopolymer
resin from printed
parts

Ultracur3D® EPD 2006

Daylight Line

Technology:

LOD Photocentric

Color:

Black



Very high
stiffness and
temperature
resistance



Ideal for large-
scale objects



Printed parts
exhibit intricate
detail



Ultracur3D® EPD 2006

Suited for:



High detail
and textured
parts



Customized
gadgets and
tools

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638	2370
Tensile Strength (MPa)	ASTM D638	50
Elongation at Break (%)	ASTM D638	10.3
Heat Deflection Temperature (°C)	ASTM D648	81



[Complete TDS](#)

Tests & Certifications

Flammability	Skin Contact	UV Stability	Chemical Resistance
UL 94 1.5 mm	ISO 10993-5; ISO 10993-10	ISO 4892-2A Cycle 1	Dataset available

Complementary Products

Ultracur3D® Cleaner



Cleaning solution for removal of any uncured photopolymer resin from printed parts

Ultracur3D® EPD 3500

Daylight Line



Technology:

LCD Photocentric

Color:

Amber



High strength,
high stiffness
& good impact
resistance



Low water
uptake



Ideal for
engineering
prototypes

Ultracur3D® EPD 3500

Suited for:



High detail
and textured
parts



Customized
gadgets and
tools

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638	2500
Tensile Strength (MPa)	ASTM D638	60
Elongation at Break (%)	ASTM D638	18
Impact Strength, Notched Izod, 23°C (J/m)	ASTM D256	25



[Complete TDS](#)

Tests & Certifications

UV Stability

Chemical Resistance

ISO 4892-2A Cycle 1

Dataset available

Complementary Products

Ultracur3D® Cleaner



Cleaning solution
for removal of
any uncured
photopolymer
resin from printed
parts

Ultracur3D® EPD 4006

Daylight Line

Technology:

LOD Photocentric

Color:

Black




Extremely
tough & durable
material



Superior impact
resistance



Easy to print and
smooth surface
finish

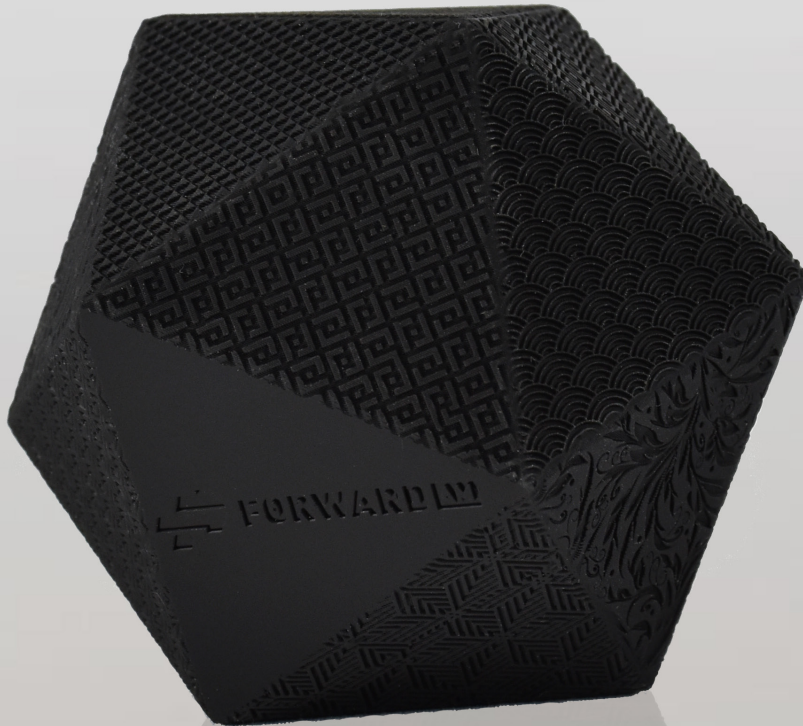

Ultracur3D® EPD 4006

Suited for:



High detail
and textured
parts



Customized
gadgets and
tools

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638	1800
Tensile Strength (MPa)	ASTM D638	45
Elongation at Break (%)	ASTM D638	45
Impact Strength, Notched Izod, 23°C (J/m)	ASTM D256	46



[Complete TDS](#)

Tests & Certifications

Flammability	Skin Contact	UV Stability	Chemical Resistance
UL 94 3 mm	ISO 10993-5	ISO 4892-2A Cycle 1	Dataset available

Complementary Products

Ultracur3D® Cleaner



Cleaning solution
for removal of
any uncured
photopolymer
resin from printed
parts



FUSED FILAMENT FABRICATION

Explore one of the broadest portfolios for Fused Filament Fabrication. Our Ultrafuse® line comprises filaments ranging from engineering-grade materials, through reinforced and support materials, to advanced metal filaments for a variety of industrial applications.

Mechanical Properties Comparison



Full Comparison Table

		Ultrafuse® Standard Filaments					Ultrafuse® Support Filaments	
		PLA	PET	ABS	PP	iPET	BVOH	HIPS
HDT (0.45 Mpa) [°C] ISO 75-2		65,0	63,0	96,0	54,0	71,0	-	91,0
Tensile Strength [MPa] ISO 527	XY	34,7	33,4	36,3	15,5	38,6	33,7	18,4
	ZX	21,2	17,2	21,3	9,0	14,7	8,7	13,7
Elongation at Break [%] ISO 527	XY	4,2	2,7	7,4	118,6	4,3	14,8	1,4
	ZX	1,2	1,1	1,8	5,4	1,2	0,6	1,3
Young's Modulus [MPa] ISO 527	XY	2308,0	1933,0	1958,0	541,0	1640,0	2339,0	1588,0
	XZ	2131,0	1665,0	1608,0	435,0	1334,0	1426,0	1603,0
Impact Strength Charpy (unnotched) [kJ/m²] ISO 179-2	XY	13,2	18,4	36,4	41,8	55,5	-	36,0
	XZ	14,3	9,7	42,2	62,3	33,7	-	57,6
	ZX	4,3	4,6	6,8	13,6	3,3	-	8,6
Impact Strength Izod (unnotched) [kJ/m²] ISO 180	XY	11,0	12,3	40,0	37,7	48,2	-	35,0
	XZ	9,6	7,7	35,7	37,6	21,9	-	57,1
	ZX	4,7	4,1	7,2	11,6	4,4	-	9,1

Ultrafuse® High Temp Filaments	Ultrafuse® Engineering Filaments					Ultrafuse® Reinforced Filaments				
PPSU	PLA Tough	ABS Fusion+	ASA	PA (Conditioned)	PC/ABS FR	PP GF30	PET CF15	PAHT CF15 (Conditioned)	PA6 GF30 (Conditioned)	PC GF30
215,0	55	91,0	101,0	135,0	86,0	127,0	108,0	128,0	114,0	134,0
74,5	40	29,5	34,6	33,2	50,1	41,7	63,2	62,9	46,4	36,1
49,0	28	17,9	12,0	17,6	17,3	15,9	12,5	19,1	12,2	11,2
7,3	7,4	10,9	4,5	143,3	10,7	4,4	3,7	2,9	3,2	2,4
2,9	2,2	2,1	1,0	12,8	0,8	0,8	0,5	0,8	1,9	1,1
2221,0	2672	1379,0	1828,0	395,0	2545,0	2628,0	6178,0	5052,0	2469,0	2664,0
2150,0	2576	1106,0	1400,0	334,0	2188,0	2242,0	2822,0	2455,0	1156,0	1231,0
224,8	33	71,9	42,7	No break	49,8	23,1	27,8	21,9	41,8	17,1
270,5	34	118,7	41,2	No break	65,4	25,8	32,0	20,4	48,8	18,9
16,3	10	6,9	5,1	13,4	2,9	2,5	1,3	2,8	3,1	3,7
No break	28	73,1	36,8	No break	57,0	20,5	25,1	16,3	36,9	13,9
No break	27	131,1	39,3	No break	87,9	2,4	22,6	15,1	41,4	17,8
21,0	10	6,6	6,8	17,4	3,0	2,6	2,4	4,1	3,8	3,4

		Ultrafuse® Flexible Filaments			
		TPU 85A	TPU 64D	TPU 95A	TPS 90A
Shore A Hardness (3 s) ISO 7619-1		85,0	58 (Shore D)	92,0	89,0
Abrasion Resistance [mm³] ISO 4649		82,0	43,0	64,0	111,0
Compression Set at 23 °C, 72 h [%] ISO 815		26,0	25,0	38,0	75,0
Elongation at Break TPE [%] ISO 527	XY	600,0	399,0	611,0	-
	ZX	320,0	115,0	192,0	-
Stress at Break TPE [MPa] ISO 527	XY	34,0	37,0	44.2	7,0
	ZX	10,0	19,0	12.2	2,0
Tear Strength [kN/m] ISO 34-1	XY	80,0	66,0	90,0	10,0
	XZ	18,0	37,0	8,0	5,0
	ZX	30,0	79,0	14,0	4,0

		Ultrafuse® Metal Filaments	
		316L	17-4 PH
Sintered Part Density [kg/m³] ISO 1183-1		7850,0	7600,0
Elongation at Break [%] ISO 6892-1 ¹	XY	53,0	4,0
	ZX	36,0	4,0
Yield Strength, R_{p0.2} [MPa] ISO 6892-1 ¹	XY	251,0	756
	ZX	234,0	764
Vickers Hardness HV10 ISO 6507-1	XY	128	291
	ZX	128	309

Print Profile Availability

- Available from Forward AM
- Available from machine manufacturer
- To be validated
- ✘ Not compatible

See complete print profile availability



	Bambu Lab			Prusa		BCN3D				Ultimaker					Raise3D				Zortrax	
	P1P	P1S	X1-Carbon	Mk3	Mk3s	Sigma R19	Sigmax R19	Epsilon W27	Epsilon W50	2+ Connect	3	S3	S5	S7	E2	Pro2	Pro3	Pro3 hyper speed	M300 Dual	Endureal
rPET	■ HS	■ HS	■ HS	■	■	■	■	■	■	■	□	■	■	■	■	■	■	□	□	□
PLA Tough	■ HS	■ HS	■ HS	■	■	■	■	■	■	■	□	■	■	□	■	■	■	■ HS	□	□
PC/ABS FR	✘	✘	■ HS	■	■	■	■	■	■	■	□	■	■	■	■	■	■	■ HS	□	■
TPU 64D	□	□	□	■	■	■	■	■	■	■	■	□	■	■	■	■	■	□	□	□
17-4 PH	□	□	□	■	■	□	■	■	■	✘	■	■	■	■	✘	■	■	✘	■	■

Ultrafuse® PLA

Standard Filaments

Technology:

Fused Filament Fabrication

Color:

Natural, Black, White
+ 22 others



High success
rate



Repeatability



Relatively
low printing
temperatures



Non/extremely
low warpage/
shrinkage

Ultrafuse® PLA

Suited for:



Prototyping

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZY
HDT (0.45 MPa) (°C)	ISO 75-2	65,0
Tensile Strength (MPa)	ISO 527	80
Elongation at Break (%)	ISO 527	4,2 / - / 1,2
Young's Modulus (MPa)	ISO 527	2308 / - / 2131
Impact Strength Izod (notched) (kJ/m ²)	ISO 180	3,3 / 2,1 / 1,6
Impact Strength Izod (unnotched) (kJ/m ²)	ISO 180	11 / 9,6 / 4,7



[Complete TDS](#)

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
210-230	-	50-70	glass	≥0,4	40-80

This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Ultrafuse® PET

Standard Filaments

Technology:

Fused Filament Fabrication

Color:

Black, White, Red, Blue
+ 4 others



Watertight prints
possible



Easy to print like
PLA



High resolution
prints



Ultrafuse® PET

Suited for:



Food applications



Parts where watertightness is required

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZX
HDT (0.45 MPa) (°C)	ISO 75-2	63,0
Tensile Strength (MPa)	ISO 527	33,4 / - / 17,2
Elongation at Break (%)	ISO 527	2,7 / - / 1,1
Young's Modulus (MPa)	ISO 527	1933 / - / 1665
Impact Strength Izod (notched) (kJ/m ²)	ISO 180	2,1 / 1,9 / 1,8
Impact Strength Izod (unnotched) (kJ/m ²)	ISO 180	12,3 / 7,7 / 4,1




[Complete TDS](#)

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
210-230	-	60-80	glass	≥0,4	40-80

This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

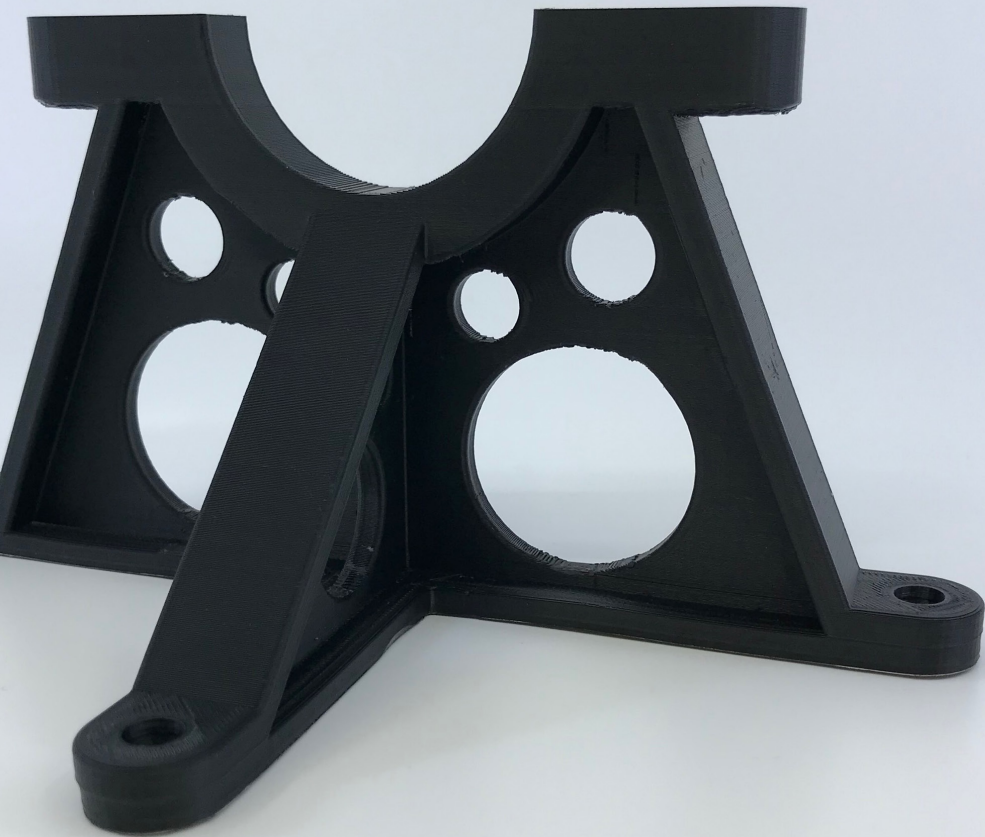

Ultrafuse® ABS

Standard Filaments

Technology:

Fused Filament Fabrication

Color:

White, Blue, Yellow
+6 others



Chemical
Resistance



Very tough



High wear and
tear



Can be used for
working parts

Ultrafuse® ABS

Suited for:



Functional
prototypes



Chemical
environment



Reasonable
heat
resistance

Technical Specifications

Mechanical properties	Standard	Value
		XY / XZ / ZX
HDT (0.45 MPa) (°C)	ISO 75-2	96,0
Tensile Strength (MPa)	ISO 527	36,3 / - / 21,3
Elongation at Break (%)	ISO 527	7,4 / - / 1,8
Young's Modulus (MPa)	ISO 527	1958 / - / 1608
Impact Strength Izod (notched) (kJ/m ²)	ISO 180	18,8 / 18,9 / 3,5
Impact Strength Izod (unnotched) (kJ/m ²)	ISO 180	40 / 35,7 / 7,2



[Complete TDS](#)

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
240-260	-	90-110	Tape, spray or glue	≥0,4	40-80

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Ultrafuse® PP

Standard Filaments

Technology:

Fused Filament Fabrication

Color:

White



**Tough and
Strong**




**Fatigue
Resistant**



**Chemical
Resistant**



Light weight
(low density)

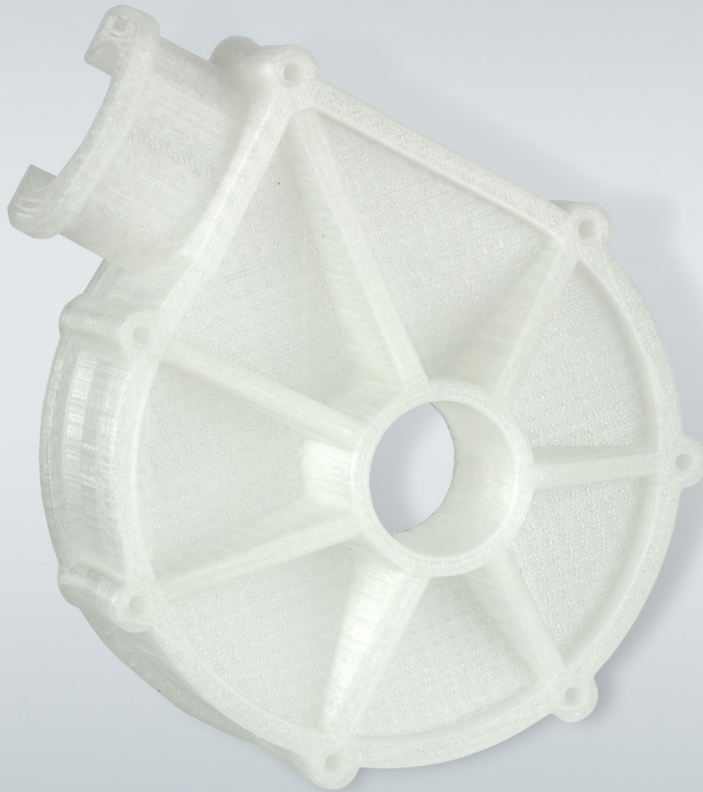

Ultrafuse® PP

Suited for:



Chemical
contact



Prototyping

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZX
HDT (0.45 MPa) (°C)	ISO 75-2	54,0
Tensile Strength (MPa)	ISO 527	15,5 / - / 9
Elongation at Break (%)	ISO 527	118,6 / - / 5,4
Young's Modulus (MPa)	ISO 527	541 / - / 435
Impact Strength Izod (notched) (kJ/m ²)	ISO 180	5,3 / 10,6 / 2,3
Impact Strength Izod (unnotched) (kJ/m ²)	ISO 180	37,7 / 37,6 / 11,6



[Complete TDS](#)

Advanced Testing

Skin Contact / Biocompatibility

ISO 10993-5; ISO
10993-10

Passed

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
220-240	-	60-80	PP tape or PP adhesive	≥0,4	20-50



Ultrafuse® rPET

Standard Filaments

Technology:

Fused Filament Fabrication

Color:

Blue Transparent



> 99% recycled
PETG



Easy to print



Great end results

Ultrafuse® rPET

Suited for:



Jigs & fixtures



Automotives parts



Prototyping

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZY
HDT (0.45 MPa) (°C)	ISO 75-2	71,0
Tensile Strength (MPa)	ISO 527	38,6 / - / 14,7
Elongation at Break (%)	ISO 527	4,3 / - / 1,2
Young's Modulus (MPa)	ISO 527	1640 / - / 1334
Impact Strength Izod (notched) (kJ/m ²)	ISO 180	4,4 / 3,3 / 1,5
Impact Strength Izod (unnotched) (kJ/m ²)	ISO 180	48,2 / 21,9 / 4,4



[Complete TDS](#)


Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
225-245	-	65-85	adhesive spray or glue	≥0,4	30-60

This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Ultrafuse® BVOH

Support Filaments

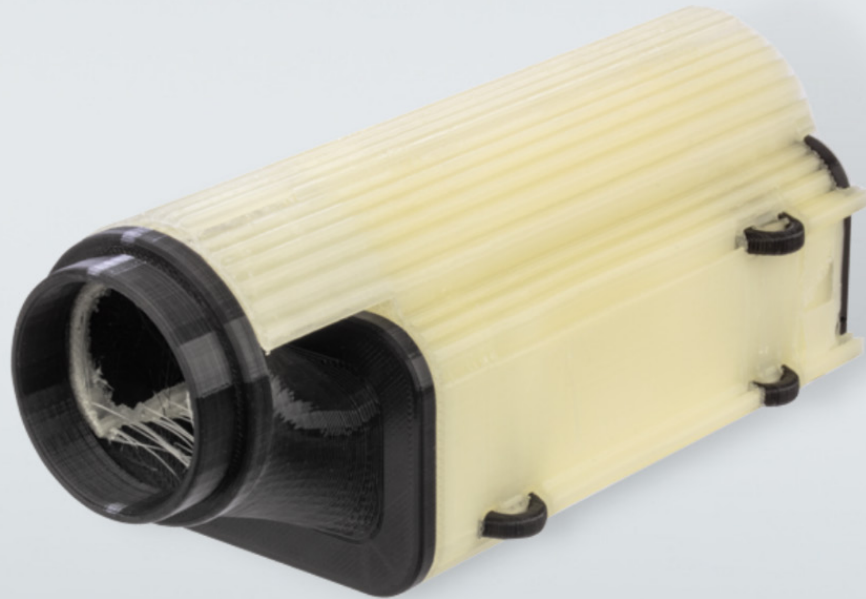

Technology:

Fused Filament Fabrication

Color:

Natural Yellow



Water soluble



Dissolves 2
times faster than
other PVA



Support
compatible
with multiple
materials

Ultrafuse® BVOH

Suited for:



Parts with
overhang



Complex parts



Hollow parts

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value
HDT (0.45 MPa) (°C)	ISO 75-2	-
Tensile Strength (MPa)	ISO 527	33,7 / - / 8,7
Elongation at Break (%)	ISO 527	14,8 / - / 0,6
Young's Modulus (MPa)	ISO 527	2339 / - / 1426



[Complete TDS](#)

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
190-210	-	60-100	glass	≥0,4	30-60

This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Ultrafuse® HiPS

Support Filaments

Technology:

Fused Filament Fabrication

Color:

White



**Easy post
processing**
(Glue and painting)



Good aesthetics



**Compatible with
many materials**



Ultrafuse® HiPS

Suited for:



Support material for printing applications with ABS

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZY
HDT (0.45 MPa) (°C)	ISO 75-2	91,0
Tensile Strength (MPa)	ISO 527	18,4 / - / 13,7
Elongation at Break (%)	ISO 527	1,4 / - / 1,3
Young's Modulus (MPa)	ISO 527	1588 / - / 1603
Impact Strength Izod (notched) (kJ/m ²)	ISO 180	6,9 / 7,1 / 4,8
Impact Strength Izod (unnotched) (kJ/m ²)	ISO 180	35 / 57,1 / 9,1



[Complete TDS](#)


Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
240-260	-	100-120	spray	≥0,4	40-80

This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Ultrafuse® Support Layer

Support Filaments

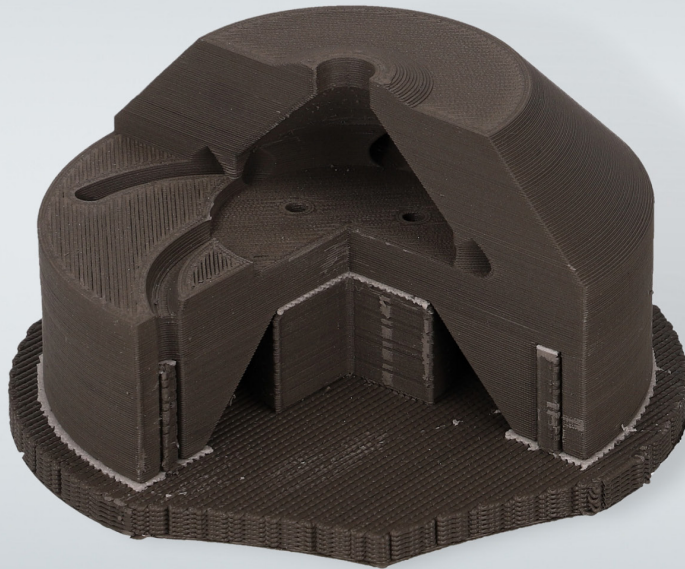

Technology:

Fused Filament Fabrication

Color:

Natural



Suitable for
Ultrafuse® metal
filaments



Allows a wider
range of designs



Excellent
surface quality
of supported
areas of the part



Minimizes
distortion during
debinding and
sintering

Ultrafuse® Support Layer

Suited for:



Series production



Functional parts and prototypes



Tooling



Jigs and fixtures

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Additional Information

Ultrafuse® Support Layer is not developed to print stand-alone parts and should only be printed as a layer attached to the support structures in dual extrusion prints for Ultrafuse® metal filaments.

****This product is not intended for sale, distribution or use in the US and Canada and is not available to our customers in those countries.**



[Complete TDS](#)

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
245-260	passively heated, closed chamber	-	-	≥0,4	15-20

This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Ultrafuse® PPSU

High Temperature Filaments

Technology:

Fused Filament Fabrication

Color:

Natural



High
dimensional
stability



Resistant to
hot water and
coolants



Resistant
to long-
term service
temperatures up
to 180°C



Inherently flame
retardant

Suited for:



Suitable for autoclaving processes



Aerospace



High-temperature applications

Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZX
HDT (0.45 MPa) (°C)	ISO 75-2	215,0
Tensile Strength (MPa)	ISO 527	74.5 / - / 49
Elongation at Break (%)	ISO 527	7.3 / - / 2.9
Young's Modulus (MPa)	ISO 527	2221 / - / 2150
Impact Strength Izod (notched) (kJ/m ²)	ISO 180	13,7 / 15,8 / 5,3
Impact Strength Charpy (notched) (kJ/m ²)	ISO 179-2	21,8 / 15,0 / 5,7



[Complete TDS](#)

Advanced Testing

Volume resistivity [Ωcm]	Surface resistivity [Ωcm]	Dielectric strength (ortho) [kV/mm]	Vicat softening point (50 N) [°C]	Flame class rating	Glow wire test (GWEPT)	Coefficient of Thermal Expansion
IEC 62631-3-1	IEC 62631-3-2	IEC 62631-3-1	ISO 306	UL94	IEC 60695-2-11	ISO 11359-2
2,60E+15 / - / -	2,60E+15	18,5	217,0	V0 @ 1.5 mm and 3.0 mm thickness	960 °C @ 1.5 mm and 3.0 mm thickness	55 E-6/K
Flammability F1 60 sec. vertical	Flammability F2 12 sec. vertical	HR Total Heat Release [KW*min/m ²]	HRRmax [KW/m ²]	Optical Smoke Density	Smoke Toxicity	Railway
FAR 25.853 (a) (thickness 1.6 and 6.35 mm)	FAR 25.853 (a) (thickness 1.6 and 6.35 mm)	FAR 25.853 (d) (thickness 1.0 and 4.0 mm)	FAR 25.853 (d) (thickness 1.0mm)	FAR 25.853 (d) (thickness 1.0 and 4.5 mm)	AITM 3.0005 (thickness 1.5 and 4.5 mm)	EN 45545-2 (thickness 1.5 and 3.0 mm)
Passed	Passed	Passed	Passed	Passed	Passed	Classified HL1-3 R7*, R23, R24, R26 * HL1-2 1.5mm

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
390-410	170-210	190-220	glass	≥0,4	25-80

Ultrafuse® PLA Tough

Engineering Filaments

Technology:

Fused Filament Fabrication

Color:

Natural, Black




Speed of
printing



Strength



Consistency

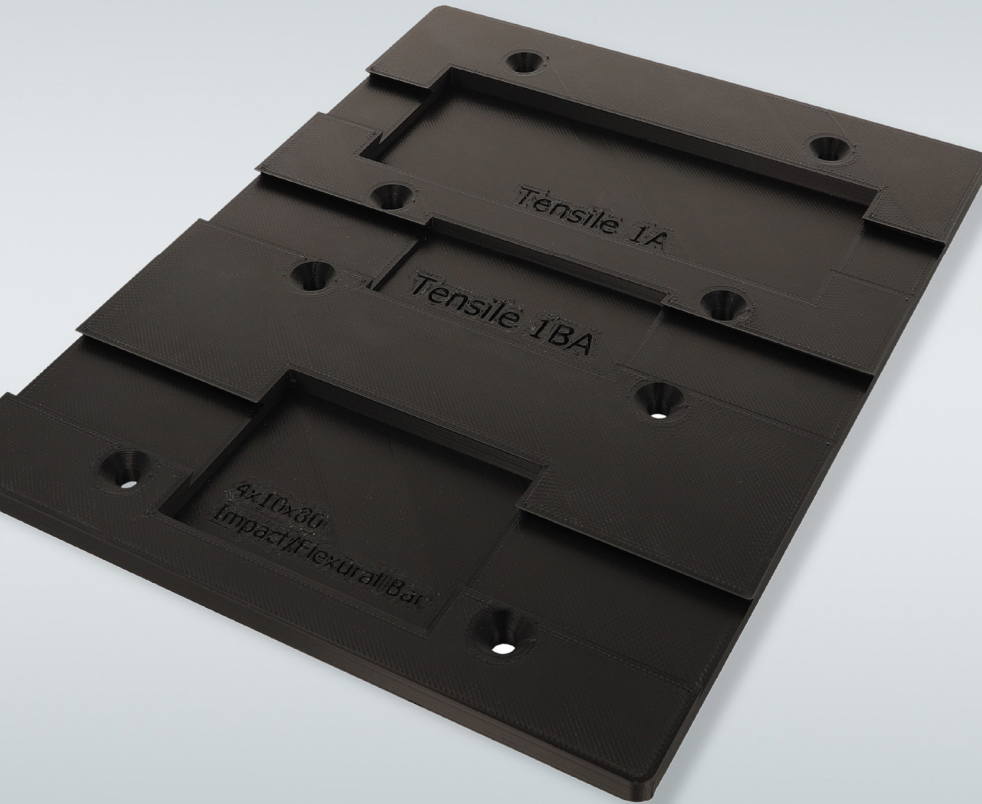

Ultrafuse® PLA Tough

Suited for:



Jigs & fixtures



Prototyping



Orthotics and Prostheses

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Technical Specifications

Mechanical properties	Standard	Value <i>XY / XZ / ZY</i>
Tensile Strength (MPa)	ISO 527	40 / - / 28
Elongation at Break (%)	ISO 527	7.4 / - / 2.2
Young's Modulus (MPa)	ISO 527	2672 / - / 2576
Impact Strength	ISO 179-2	33 / 34 / 10
Flexural Strength	ISO 178	73 / 75 / 51



[Complete TDS](#)

Advanced Testing

Skin Contact / Biocompatibility


ISO 10993-5;
ISO 10993-10

Passed

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
200-220	-	50-70	glass	≥0,4	40-300

This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

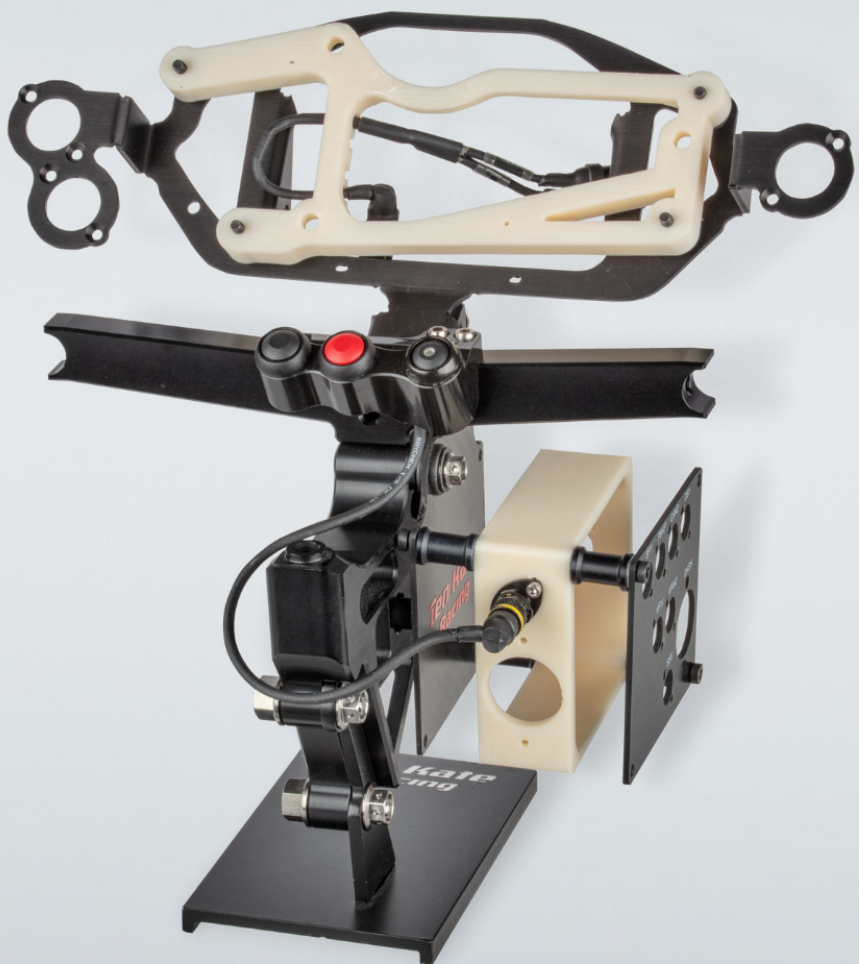

Ultrafuse® ABS Fusion+

Engineering Filaments

Technology:

Fused Filament Fabrication

Color:

Natural, Black, Grey



Easy to print



Direct printing
on heated glass
or print bed
surfaces



High heat
resistance



Adheres to water
soluble support

Ultrafuse® ABS Fusion+

Suited for:



Jigs &
fixtures



Automotive
parts

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZY
HDT (0.45 MPa) (°C)	ISO 75-2	91,0
Tensile Strength (MPa)	ISO 527	29,5 / - / 17,9
Elongation at Break (%)	ISO 527	10,9 / - / 2,1
Young's Modulus (MPa)	ISO 527	1379 / - / 1106
Impact Strength Izod (notched) (kJ/m ²)	ISO 180	26,4 / 38,4 / 2,2
Impact Strength Izod (unnotched) (kJ/m ²)	ISO 180	73,1 / 131,1 / 6,6



Complete TDS

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
240-260	-	100-120	glass + spray glue	≥0,4	40-80

This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Ultrafuse® ASA

Engineering Filaments

Technology:

Fused Filament Fabrication

Color:

Natural, Black



UV Stabilized



Weather
resistance



Chemical
resistance



Resistant to
wear and tear



Ultrafuse® ASA

Suited for:



Outdoor use



Functional
prototypes



Chemical
environment



Reasonable
heat
resistance

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZY
HDT (0.45 MPa) (°C)	ISO 75-2	101,0
Tensile Strength (MPa)	ISO 527	34,6 / - / 12
Elongation at Break (%)	ISO 527	4,5 / - / 1
Young's Modulus (MPa)	ISO 527	1828 / - / 1400
Impact Strength Izod (notched) (kJ/m ²)	ISO 180	8,7 / 11,4 / 1,9
Impact Strength Izod (unnotched) (kJ/m ²)	ISO 180	36,8 / 39,3 / 6,8



[Complete TDS](#)

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
260-280	passively heated, closed chamber	100-120	spray or PC adhesive	≥0,4	30-60

This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.



Ultrafuse® PA

Engineering Filaments

Technology:

Fused Filament Fabrication

Color:

Natural & Black



Good fatigue
resistance



Good wear
resistance/
lubricity



Good impact
resistance at low
temperatures



Low melting
point makes
it printable
for many FFF
printers

Ultrafuse® PA

Suited for:



Suitable for a wide range of different components and machine elements

Most engineering sectors

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZY
HDT (0.45 MPa) (°C)	ISO 75-2	135,0
Tensile Strength (MPa)	ISO 527	33,2 / - / 17,6
Elongation at Break (%)	ISO 527	143,3 / - / 12,8
Young's Modulus (MPa)	ISO 527	395,0 / - / 334,0
Impact Strength Izod (notched) (kJ/m ²)	ISO 180	85,4 / 106,0 / 10,1
Impact Strength Charpy (notched) (kJ/m ²)	ISO 179-2	- / 136,0 / 9,4



Complete TDS

Advanced Testing

Vicat softening point (50 N) [°C]

ISO 306

172,0

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
220-250	-	90-120	glass with PVA	≥0,4	30-60



Ultrafuse® PC/ABS FR

Engineering Filaments

Technology:

Fused Filament Fabrication

Color:

Black



Outstanding
aesthetics



Strong layer
adhesion



High print
speeds possible



UL94 V0 flame
retardancy

Ultrafuse® PC/ABS FR

Suited for:



Housing for
Raspberry pi



Sockets and
plugs



Housing for
handheld
devices or
powertools



Automotive
components

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZX
HDT (0.45 MPa) (°C)	ISO 75-2	86,0
Tensile Strength (MPa)	ISO 527	50,1 / - / 17,3
Elongation at Break (%)	ISO 527	10,7 / - / 0,8
Young's Modulus (MPa)	ISO 527	2545 / - / 2188
Impact Strength Izod (notched) (kJ/m ²)	ISO 180	16,8 / 30,3 / 1,8
Impact Strength Izod (unnotched) (kJ/m ²)	ISO 180	16,8 / 30,3 / 1,8




Complete TDS

Advanced Testing

Flame class rating	Glow wire test (GWEPT)	Railway
UL94	IEC 60695-2-11	EN 45545-2 (thickness 1.5 and 3.0 mm)
VO @ 1.5 mm and 3.0 mm thickness	725 °C @ 1.5 mm thickness 960 °C @ 3.0 mm thickness	Classified HL1-3 R26

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
260-280	passively heated, closed chamber	90-110	glass	≥0,4	30-50

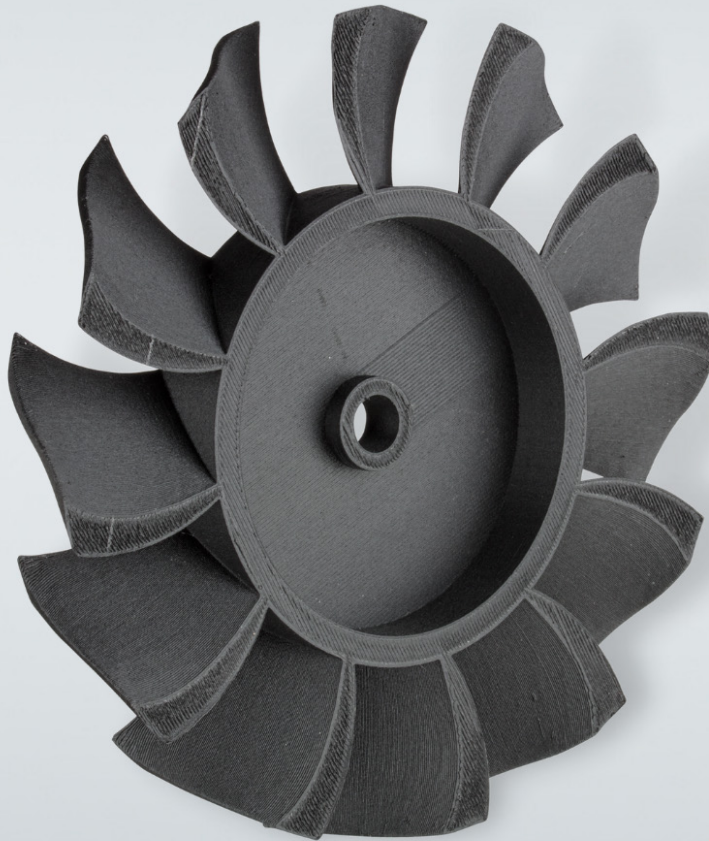

Ultrafuse® PP GF30

Reinforced Filaments

Technology:

Fused Filament Fabrication

Color:

Black



Excellent
chemical
resistance



High heat
resistance



Improved UV
resistance



Low moisture
uptake

Ultrafuse® PP GF30

Suited for:



Functional
prototyping



Automotive/
transportation



Jigs and
fixtures

Technical Specifications

Mechanical properties	Standard	Value
		XY / XZ / ZY
HDT (0.45 MPa) (°C)	ISO 75-2	127,0
Tensile Strength (MPa)	ISO 527	41,7 / - / 15,9
Elongation at Break (%)	ISO 527	4,4 / - / 0,8
Young's Modulus (MPa)	ISO 527	2628 / - / 2242
Impact Strength Izod (notched) (kJ/m ²)	ISO 180	5,6 / 6,2 / 1,4
Impact Strength Izod (unnotched) (kJ/m ²)	ISO 180	20,5 / 2,4 / 2,6



[Complete TDS](#)

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
240-260	-	20-40 / 70-90	PP strapping tape / PPGF adhesive	≥0,6	30-80

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.



Ultrafuse® PET CF15

Reinforced Filaments

Technology:

Fused Filament Fabrication

Color:

Black



Strong, rigid
components



Very low
moisture
absorption



High
dimensional
stability



Heat resistant up
to 108 °C

Ultrafuse® PET CF15

Suited for:



Automotive



Jigs & fixtures



Applications
for humid
operating
environments

Technical Specifications

Mechanical properties	Standard	Value
		XY / XZ / ZX
HDT (0.45 MPa) (°C)	ISO 75-2	108,0
Tensile Strength (MPa)	ISO 527	63,2 / - / 12,5
Elongation at Break (%)	ISO 527	3,7 / - / 0,5
Young's Modulus (MPa)	ISO 527	6178 / - / 2822
Impact Strength Izod (notched) (kJ/m ²)	ISO 180	5,7 / 5 / 2
Impact Strength Izod (unnotched) (kJ/m ²)	ISO 180	25,1 / 22,6 / 2,4



[Complete TDS](#)

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
250-270	-	65-85	PEI or glass	≥0,6	30-80

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Ultrafuse® PAHT CF15

Reinforced Filaments

Technology:

Fused Filament Fabrication

Color:

Black



Higher chemical
resistance than
most PA grades



Strong, rigid
components



High
dimensional
stability



Low moisture
absorption



Ultrafuse® PAHT CF15

Suited for:



Automotive



Complex geometries in challenging environments

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZY
HDT (0.45 MPa) (°C)	ISO 75-2	128,0
Tensile Strength (MPa)	ISO 527	62,9 / - / 19,1
Elongation at Break (%)	ISO 527	2,9 / - / 0,8
Young's Modulus (MPa)	ISO 527	5052,0 / - / 2455,0
Impact Strength Izod (notched) (kJ/m ²)	ISO 180	6,5 / 5,8 / -
Impact Strength Izod (unnotched) (kJ/m ²)	ISO 180	16,3 / 15,1 / 4,1



[Complete TDS](#)

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
260-280	-	100-120	PEI or glass	≥0,6	30-80

This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.



Ultrafuse® PA6 GF30

Reinforced Filaments

Technology:

Fused Filament Fabrication

Color:

Black



Good chemical
resistance



Very high
stiffness and
strength



Resistance
to UV light
exposure



Excellent layer
adhesion

Ultrafuse® PA6 GF30

Suited for:



Industrial tooling



Automotive / transportation



Functional prototyping

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value <small>XY / XZ / ZX</small>
HDT (0.45 MPa) (°C)	ISO 75-2	114,0
Tensile Strength (MPa)	ISO 527	46,4 / - / 12,2
Elongation at Break (%)	ISO 527	3,2 / - / 1,9
Young's Modulus (MPa)	ISO 527	2469,0 / - / 1156,0
Impact Strength Izod (notched) (kJ/m ²)	ISO 180	20,9 / 19,0 / 2,7
Impact Strength Izod (unnotched) (kJ/m ²)	ISO 180	36,9 / 41,4 / 3,8



[Complete TDS](#)

Advanced Testing

Vicat softening point (50 N) [°C]

ISO 306

192,0

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
240-280	-	70-100	glass	≥0,6	30-80

Ultrafuse® PC GF30

Reinforced Filaments

Technology:

Fused Filament Fabrication

Color:

Black



UL94 V0 flame
retardancy



Very low
moisture
absorption



Good
temperature
resistance



Good heat
deflection
temperature



Ultrafuse® PC GF30

Suited for:



Electronics



Automotive /
transportation



Functional
prototyping

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZY
HDT (0.45 MPa) (°C)	ISO 75-2	134,0
Tensile Strength (MPa)	ISO 527	36,1 / - / 11,2
Elongation at Break (%)	ISO 527	2,4 / - / 1,1
Young's Modulus (MPa)	ISO 527	2664,0 / - / 1231,0
Impact Strength Izod (notched) (kJ/m ²)	ISO 180	5,6 / 5,4 / 2,1
Impact Strength Izod (unnotched) (kJ/m ²)	ISO 180	13,9 / 17,8 / 3,4



[Complete TDS](#)

Advanced Testing

Flame class rating

UL94

Railway

EN 45545-2
(thickness 1.5 and 3.0 mm)

V0 @ 1.5 mm and 3.0
mm thickness

Classified
HL1-3 R22, R23, R24, R26

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
280-330	-	80-100	PC adhesive	≥0,6	30-60



Ultrafuse® TPU 85A

Flexible Filaments

Technology:

Fused Filament Fabrication

Color:

Natural



High tensile strength and outstanding resistance to tear propagation



Excellent damping characteristics



High resistance to oils, greases, oxygen and ozone



Very good low-temperature flexibility

Ultrafuse® TPU 85A

Suited for:



Automotive,
industrial
manufacturing
agriculture and
construction

Footwear,
sports and
leisure

Functional
flexible parts

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZX
Compression Set at 23 °C, 72 h (%)	ISO 815	26,0
Abrasion Resistance (mm ³)	ISO 4649	82,0
Shore A Hardness (3 s)	ISO 7619-1	85,0
Elongation at Break TPE (%)	ISO 527	600 / - / 320
Stress at Break TPE (MPa)	ISO 527	34 / - / 10
Tear Strength (kN/m)	ISO 34-1	80 / 18 / 30



[Complete TDS](#)

Advanced Testing

Volume resistivity [Ωcm]	Dielectric strength (orthogonal) [kV/mm]	Skin Contact / Biocompatibility
IEC 62631-3-1	IEC 62631-3-1	ISO 10993-5; ISO 10993-10
2,60E+11 / - / 2,10E+11	21,0	Passed

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
200-220	-	40	glass	≥0,4	15-40

This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Ultrafuse® TPU 64D

Flexible Filaments

Technology:

Fused Filament Fabrication

Color:

White, Black



High resistance
to oils, greases,
oxygen and
ozone



Compatible with
water soluble
support



High impact
resistance



High wear
and abrasion
resistance

Ultrafuse® TPU 64D

Suited for:



Tooling, jigs
and fixtures



Functional
flexible parts



Wear and tear
application

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZX
Compression Set at 23 °C, 72 h (%)	ISO 815	25,0
Abrasion Resistance (mm ³)	ISO 4649	43,0
Elongation at Break TPE (%)	ISO 527	399 / - / 115
Stress at Break TPE (MPa)	ISO 527	37 / - / 19
Tear Strength (kN/m)	ISO 34-1	66 / 37 / 79



[Complete TDS](#)

Advanced Testing

Skin Contact / Biocompatibility

ISO 10993-5; ISO
10993-10

Passed

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
230-255	-	55	glass	≥0,4	30-60



Ultrafuse® TPU 95A

Flexible Filaments

Technology:

Fused Filament Fabrication

Color:

White, Black



Perfect for fast
printing



High abrasion
resistance



Good resistance
to oils and
common
industrially used
chemicals



Printable on
direct drive and
bowden style
printers

Ultrafuse® TPU 95A

Suited for:



Wear and tear application



Functional flexible parts

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value <small>XY / XZ / ZX</small>
Compression Set at 23 °C, 72 h (%)	ISO 815	38,0
Abrasion Resistance (mm ³)	ISO 4649	64,0
Shore A Hardness (3 s)	ISO 7619-1	92,0
Elongation at Break TPE (%)	ISO 527	611 / - / 192
Stress at Break TPE (MPa)	ISO 527	44,2 / - / 12,2
Tear Strength (kN/m)	ISO 34-1	90 / 8 / 14



[Complete TDS](#)

Advanced Testing

Skin Contact / Biocompatibility

ISO 10993-5; ISO 10993-10

Passed

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
210-230	-	40	glass	≥0,4	15-40

Ultrafuse® TPS 90A

Flexible Filaments

Technology:

Fused Filament Fabrication

Color:

Natural White



Non-slip
properties



Reduced
moisture uptake



Excellent layer
adhesion



Very good low-
temperature
flexibility



Ultrafuse® TPS 90A

Suited for:



Functional flexible parts



Handles of appliances



Seals and gaskets



Tooling, jigs and fixtures

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value <small>XY / XZ / ZX</small>
Compression Set at 23 °C, 72 h (%)	ISO 815	75,0
Abrasion Resistance (mm ³)	ISO 4649	111,0
Shore A Hardness (3 s)	ISO 7619-1	89,0
Strain at Break TPE (%)	ISO 527	280 / - / 9
Stress at Break TPE (MPa)	ISO 527	7 / - / 2
Tear Strength (kN/m)	ISO 34-1	10 / 5 / 4



[Complete TDS](#)

Advanced Testing

Skin Contact / Biocompatibility

ISO 10993-5; ISO 10993-10

Passed

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
260-280	-	70-90	PEI, PI or glue	≥0,4	10-30

Ultrafuse® 316L

Metal Filaments

Technology:

Fused Filament Fabrication

Color:

Steel



Attractive
Total Cost of
Ownership



Fast material
exchange



Easily applicable
filament for FFF



Easy and
affordable metal
3D printing

Ultrafuse® 316L

Suited for:



Tooling



Jigs & fixtures



Functional
prototypes



Suitable
for serial
production

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.

Technical Specifications

Mechanical properties	Standard	Value XY / ZY
Impact Strength Charpy (notched) (kJ/m ²)	ISO 148-12	111,0
Tensile Strength (MPa)	ISO 6892-11	561 / 521
Elongation at Break (%)	ISO 6892-11	53 / 36
Yield Strength, R _p 0.2 (MPa)	ISO 6892-11	251 / 234
Vickers Hardness	ISO 6507-1	128 HV10 / 128HV10



Complete TDS

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
230-250	-	90-120	glass + tape or glue	≥0,4	15-50

This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated February 2023.



Ultrafuse® 17-4 PH

Metal Filaments

Technology:

Fused Filament Fabrication

Color:

Steel



Easy and affordable way of metal 3D printing



Fully hardened enables highest strength



Wide range of post-processing options for green parts



High mechanical strength and hardness

Ultrafuse® 17-4PH

Suited for:



Tooling



Jigs & fixtures



Functional parts & prototypes



Series production

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Technical Specifications

Mechanical properties	Standard	Value XY / ZX
Tensile Strength (MPa)	ISO 6892-11	990 / 1004
Elongation at Break (%)	ISO 6892-11	4 / 4
Yield Strength, Rp 0.2 (MPa)	ISO 6892-11	756 / 764
Vickers Hardness HV10	ISO 6507-1	291 / 309



[Complete TDS](#)

Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
230-250	-	90-120	glass + tape or glue	≥0,4	15-50


This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.




SOLUTIONS & SERVICES

More than just material – From design
to the finished product

Discover the full range of Ultrasim® 3D
Services to support customers, from
design for AM and simulation of part
behavior to post-processing the final
part.

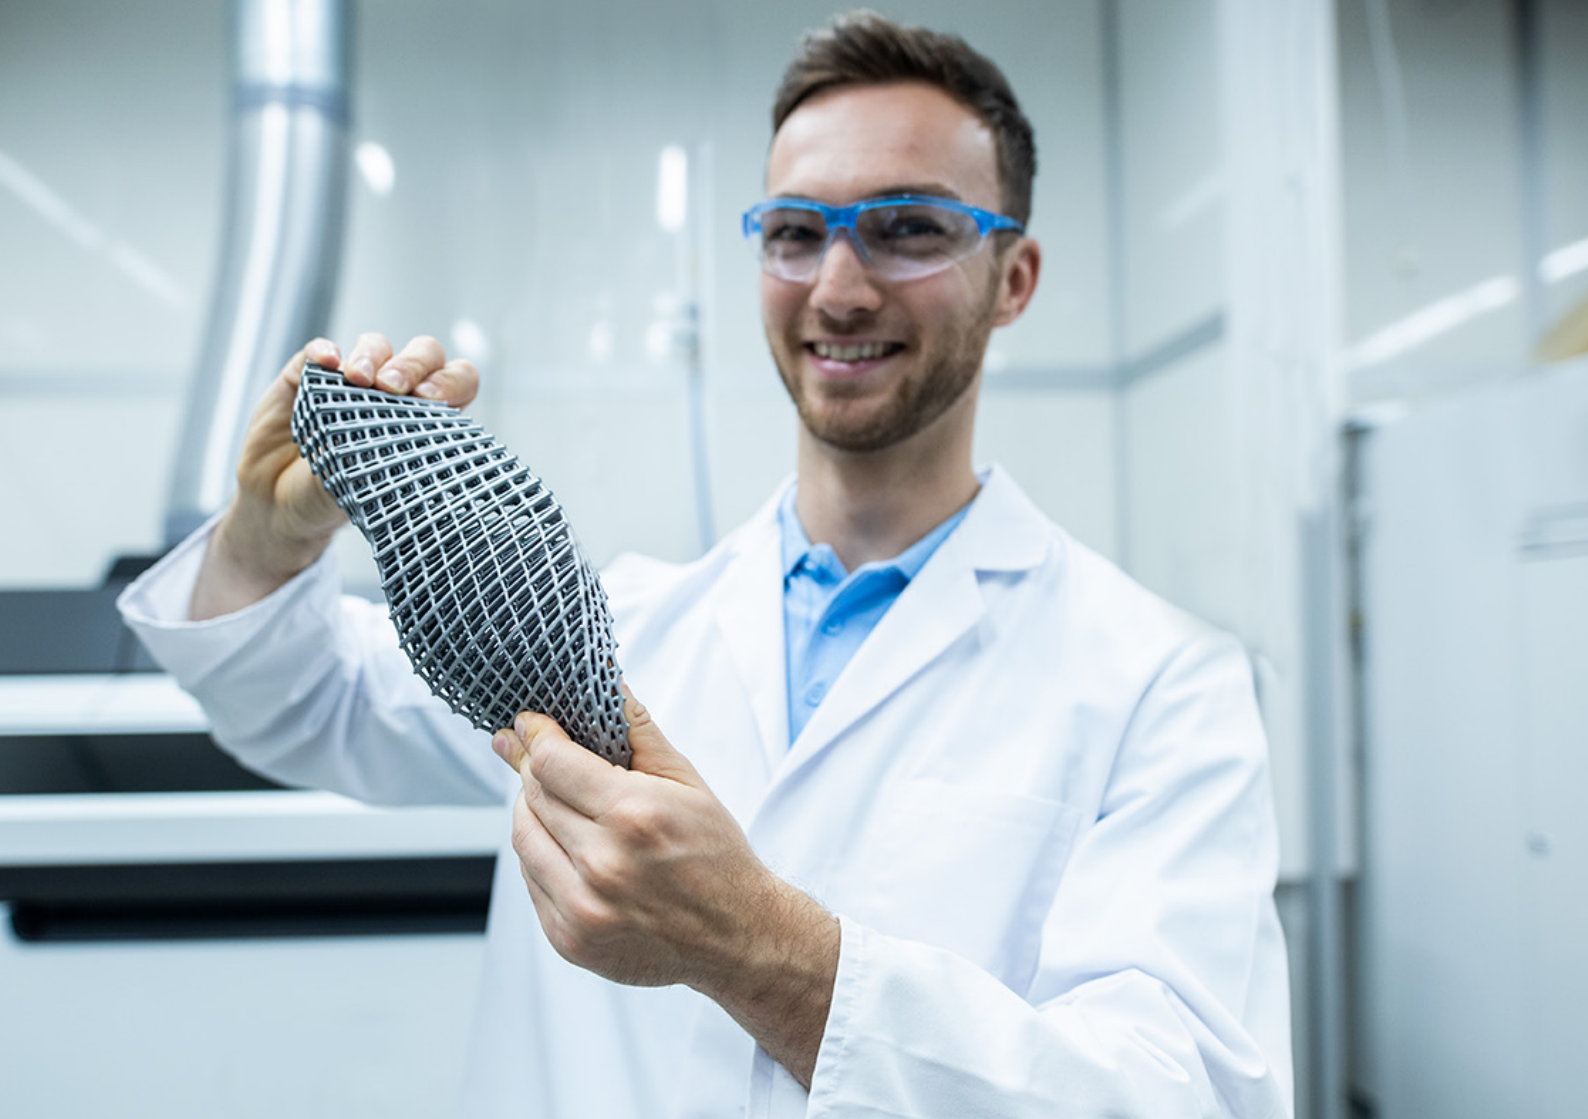

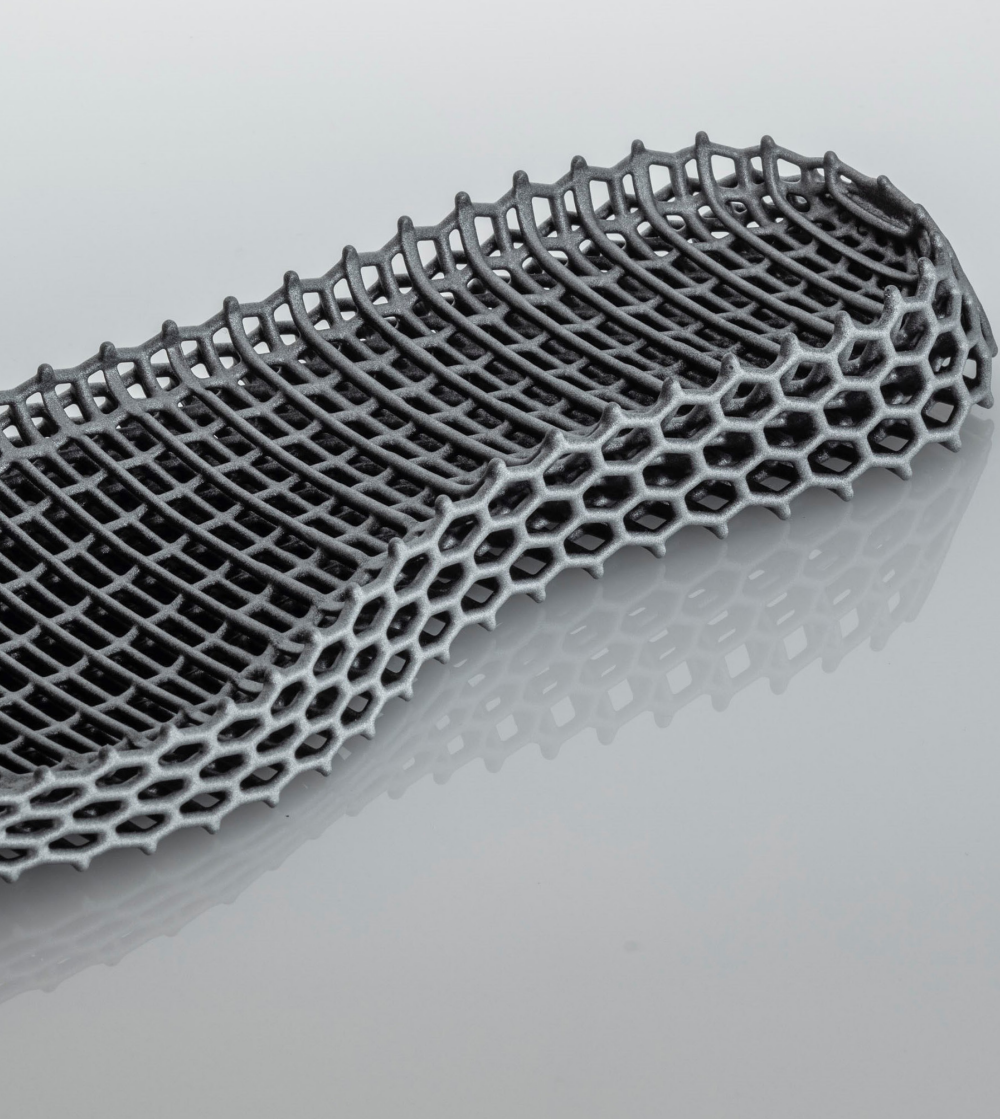

Ultrasim® 3D Lattice Design

Technologies:

HP MJF Technologies

SLS Technologies

- Increased Comfort
- Aeration
- Weight Reduction
- Optimized Material Performance

Ultrasim® 3D Lattice Design

Suited for:



Footwear



Industrial



Sports



Automotive



Medical Applications



Consumer Goods

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Offers

	Starter: Lattice Design Service	Premium: Foam Replacement	Enterprise: Full Engineering Support
Description	Custom designed lattice including partial and multi-zone lattices	Custom foam replacement lattice design using proprietary FEA and lattice library	Complete product design development lattice engineering
STL file of digital lattice part	■	■	■
Digital Stress-Strain Curves of all lattices	■	■	■
Customized 3D Printed Lattice sample		■	■
Digital Stress-Strain Curves of tested foam		■	■
Full Engineering			■
Material Compatibility	Full Ultrasim® Powders line	Ultrasim® TPU01	Full Ultrasim® Powders line Full Ultracur3D® Photopolymers line Full Ultrafuse® Filaments line

Ultrasim® 3D Lattice Engine



Material Compatibility:

Ultrasim® Powders

- Pre-selected, validated lattices
- One-click lattice engineering
- On-premise software solution

Ultrasim® 3D Lattice Engine

Suited for:



Footwear



Seating






Protection

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Workflow



1. Upload STL

Upload your solid STL file and choose the material the part will be produced in.

2. Select Lattice

Choose from pre-engineered lattices designed specifically for different applications by using either:

a) The Ultrasim® 3D Lattice Test Pad to select the desired lattice by feel.

b) The Ultrasim® 3D Lattice Library to select by mechanical data of stress-strain curves and specifying different mechanical properties.

3. Generate and Download Lattice File

The selected lattice is automatically generated into the part. You can download the ready-to-print STL and print your part.

Ultrasim® 3D Simulation (FEA)



Material Compatibility:

Ultrasint® Powders

Ultracur3D® Photopolymers

- Ensure your design works
- Material data & modeling
- Quicker development cycles
- 3D design optimization

Ultrasim® 3D Simulation (FEA)

Suited for:



Footwear



Industrial



Sports



Automotive



Medical Applications



Consumer Goods

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Offers

	Starter: Raw Material Data	Premium: 3D Simulation as a Service	Enterprise: Material Model as a Service
Description	Get the curves behind our TDS data to start basic simulation work. Add additional temperatures or strain-rates to the starter solution.	We run the simulation for you. We help you to speed up your engineering process and increases confidence in part performance using a digital twin of your part.	Use our in-house developed material models for 3D-Printing including anisotropy of the process and our experience in virtual Engineering.
Material Data at room temperature	■	■	■
3D Simulation (FEA) support		■	■
Ultrasim 3D material model as a service (incl. installation)			■
Material Compatibility <i>(Preliminary Compatibility)</i>	Ultrasint® TPU01 Ultrasint® PA6 MF Ultracur3D® RG 35 Ultracur3D® RG 1100 Ultracur3D® ST 45 Ultracur3D® ST 80 Ultracur3D® EPD 2006 --- Ultrasint® PA11 Ultrasint® PA11 ESD Ultrasint® PA11 CF	Ultrasint® TPU01 Ultrasint® PA6 MF Ultracur3D® RG 35 Ultracur3D® RG 1100 Ultracur3D® ST 45 Ultracur3D® ST 80 Ultracur3D® EPD 2006 --- Ultrasint® PA11 Ultrasint® PA11 ESD Ultrasint® PA11 CF	Ultrasint® TPU01 Ultrasint® PA6 MF Ultracur3D® RG 35 --- Ultrasint® PA11 Ultrasint® PA11 ESD Ultrasint® PA11 CF



Ultrasim® 3D Cost Analysis (TCO)

Material Compatibility:

Ultrasint® Powders

Ultracur3D® Photopolymers

Ultrafuse® Filaments

- Transparent cost breakdown
- Compare AM technologies
- Sensitivity Analysis
- Cost potential of commercialization

Ultrasim® 3D Cost Analysis (TCO)

Suited for:



Footwear



Industrial



Sports



Automotive



Medical
Applications



Consumer
Goods

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Offers

**Starter:
Single Cost Pricing**

**Premium:
Cost
Benchmarking**

**Enterprise:
AM Cost Tool**

	Starter: Single Cost Pricing	Premium: Cost Benchmarking	Enterprise: AM Cost Tool
Description	Understanding the cost structure of your 3D printed part and what drives the costs.	Compare the costs of several AM technologies and understand what technology might be most suitable for you.	Use our in-house developed AM Cost Tool for your own calculations.
PDF Cost report	■	■	■
Cost comparison of two AM technologies		■	■
Sensitivity analysis		■	■
AM cost tool			■

Material Compatibility

Full Ultrasim® Powders line

Full Ultrasim® Powders line

Coming Soon


Full Ultracur3D®
Photopolymers line

Full Ultracur3D®
Photopolymers line

Full Ultrafuse® Filaments line

Full Ultrafuse® Filaments line

Ultrasim® Sustainability Analysis

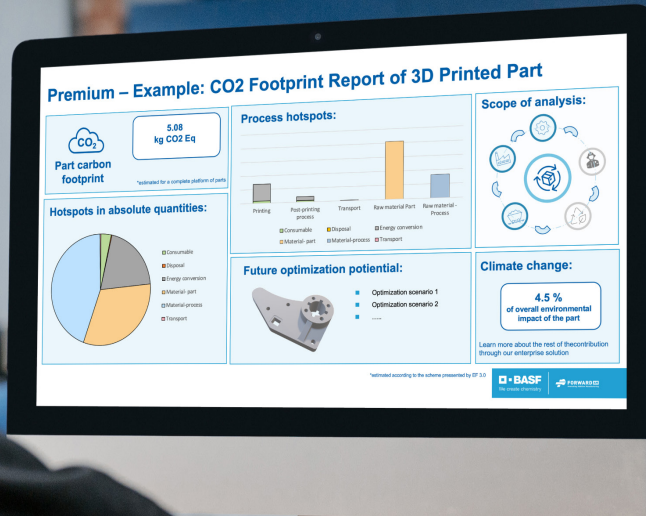

Material Compatibility:

Ultrasim® Powders

Ultrafuse® Filaments

- Transparency of sustainability by material and part
- Critically-reviewed Lifecycle Assessment Study: ISO 14040:2006 & ISO 14044:2006
- Analysis of 16 environmental impact categories according to EF 3.0

Ultrasim® 3D Sustainability Analysis

Suited for:



Footwear



Industrial



Sports



Automotive



Medical
Applications



Consumer
Goods

Access all resources by scanning the
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Offers

	Starter: Material LCA	Premium: Part LCA Service (CO2)	Enterprise: Become a Partner
LCA Material One-Pager	■	■	■
CO2 footprint report of 3D printed part		■	■
Add your printer			■
Implement LCA data with your software			■

Material Compatibility

Ultrasint® TPU01
Ultrasint® TPU 88A
Ultrasint® PP 1400 Black
Ultrasint® PA11
Ultrasint® PA11 Black

Ultrafuse® PLA
Ultrafuse® ABS
Ultrafuse® PET
Ultrafuse® rPET

Ultrasint® TPU01
Ultrafuse® PLA
Ultrafuse® ABS
Ultrafuse® PET
Ultrafuse® rPET

Coming Soon:
Ultrasint® TPU 88A
Ultrasint® PP 1400 Black
Ultrasint® PA11
Ultrasint® PA11 Black

BASF Forward AM Materials



Ultracur3D® Coat F+

Material Compatibility:

Ultrasint® Powders

Ultracur3D® Photopolymers

Ultrafuse® Filaments

Colors:

10+ Standard Colors

Custom Color services available

Application Method:

Spraying



Highly Flexible



Waterbased

Low VOC content



Broad Color
Portfolio

Ultracur3D® Coat F+

Suited for:



Footwear



Industrial



Sports



Automotive



Medical Applications



Consumer Goods

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

Technical Specifications

Mechanical properties	Standard	Typical Value
Ph Value	DIN EN ISO 3251	7.0 – 8.0
Viscosity at 23°C, 1000 1/s	Spindle Viscometer	100 – 300 mPas
Density at 23°C	DIN EN ISO 2811-3	1.0 – 1.3 g/cm ³
Solid content	DIN EN ISO 3251	34 – 48%
Flashpoint	ISO 3679	> 95°C



[Complete TDS](#)

Tests & Certifications

Skin Contact	UV Stability	Hydrolysis Resistance
ISO 10993-5	ISO 4892-2A ISO 4892-2B Cycle 3	70°C / 95% rH / 168h

User Guidelines

Mixing Ratio	Hardener	Reducer	Potlife at 20°C	Shelf life (5-35°C)	
100 : 4 by weight	Ultracur3D® Hardener F+	DI-Water	2 h	6 months	
Nozzle pressure	Nozzle size	Spray passes	Flash off at 23°C	Dry film thickness	Drying conditions
2 – 2.5 bar	1.3 mm	1.5 - 2	5 min	25 ± 5 µm	30 minutes at 80°C

Material Compatibility

Ultrasint® TPU01
Ultrasint® TPU 88A
Ultrasint® PA11
Ultrasint® PA11 Black CF

Ultracur3D® RG 35
Ultracur3D® ST 45
Ultracur3D® FL 300
Ultracur3D® FL 60

Ultracur3D® EL 60
Ultracur3D® EL 4000
Ultracur3D® EPD 1086

Ultrafuse® ASA
Ultrafuse® TPU 85A
Ultrafuse® TPU 90A
Ultrafuse® TPU 64D
Ultrafuse® TPS 90A



Have a 3D printing project in mind?

At Forward AM, we drive the industrialization of Additive Manufacturing.

We accompany customers from first idea to final printed part - on global scale, at highest quality.

Get in touch with us:

sales@basf-3dps.com



Speyerer Straße 4
69115 Heidelberg, Germany

+49 6221 67417900

sales@basf-3dps.com

forward-am.com