

**3D Printing Materials  
& Solutions  
Fall 2024**

**forwardam.**

**Make the Incredible**

[www.forward-am.com](http://www.forward-am.com)



# forward**am**.

## Make the Incredible with Forward AM's Materials and Solutions



Ultrafuse®  
Filaments & Pellets



Ultrasint®  
Powders



Ultracur3D®  
Photopolymers



Ultrasim® 3D  
Services & Solutions

We believe in a future where  
AM is a core element in every  
manufacturing process.

[www.forward-am.com](http://www.forward-am.com)







## Have a 3D printing project in mind?

At Forward AM, we drive the industrialization of Additive Manufacturing. We accompany customers from first idea to final printed part - on global scale, at highest quality.

**Get in  
Touch!**



[forward-am.com](https://forward-am.com)

# Table of Contents



<b>Powder Bed Fusion</b>	<b>1</b>	<b>Photopolymers</b>	<b>29</b>		
Ultrasint® PP 1400 Black	9	Ultracur3D® RG 35	37	Ultracur3D® EL 150	57
Ultrasint® PA11	11	Ultracur3D® RG 1100	39	Ultracur3D® EL 4000	59
Ultrasint® PA11 Black	13	Ultracur3D® RG 3280	41	Ultracur3D® DM 2505	61
Ultrasint® PA11 CF	15	Ultracur3D® ST 45	43	Ultracur3D® DM 2304	63
Ultrasint® PA11 rCF	17	Ultracur3D® ST 80	45	Ultracur3D® DMD 1005	65
Ultrasint® PA11 ESD	19	Ultracur3D® ST 1400	47	Ultracur3D® EPD 1006	67
Ultrasint® TPU01	21	Ultracur3D® ST 7500 G	49	Ultracur3D® EPD 1086	69
Ultrasint® TPU 88A	23	Ultracur3D® FL 300	51	Ultracur3D® EPD 2006	71
Ultrasint® TPU 88A Black	25	Ultracur3D® FL 60	53	Ultracur3D® EPD 3500	73
Ultrasint® TPU 90 LT	27	Ultracur3D® EL 60	55	Ultracur3D® EPD 4006	75

# Table of Contents



## Fused Filament Fabrication 79


Ultrafuse® PLA	85	Ultrafuse® ASA	107	Ultrafuse® TPS 90A	129
Ultrafuse® PET	87	Ultrafuse® PA	109	Ultrafuse® 316L	131
Ultrafuse® ABS	89	Ultrafuse® PC/ABS FR	111	Ultrafuse® 17-4PH	133
Ultrafuse® PP	91	Ultrafuse® PP GF30	113		
Ultrafuse® rPET	93	Ultrafuse® PET CF15	115	<b>Fused Granulate Fabrication</b>	<b>135</b>
Ultrafuse® BVOH	95	Ultrafuse® PAHT CF15	117	Ultrafuse® Pellets rPETG	136
Ultrafuse® HiPS	97	Ultrafuse® PA6 GF 30	119	Ultrafuse® Pellets PP GF30	136
Ultrafuse® Support Layer	99	Ultrafuse® PC GF 30	121	Ultrafuse® Pellets PC GF30	136
Ultrafuse® PPSU	101	Ultrafuse® TPU 85A	123		
Ultrafuse® PLA Tough	103	Ultrafuse® TPU 64D	125		
Ultrafuse® ABS Fusion+	105	Ultrafuse® TPU 95A	127		

# Table of Contents



## Solutions & Services 137

Ultrasim® 3D Lattice Design	139
Lattice Design in HyDesign	141
Simulation (FEA) Ultrasim® 3D	143
Ultracur3D® Coat F+	145
Ultrasim® 3D Testing for AM (TfAM)	147
Ultrasim® 3D NextMold	149

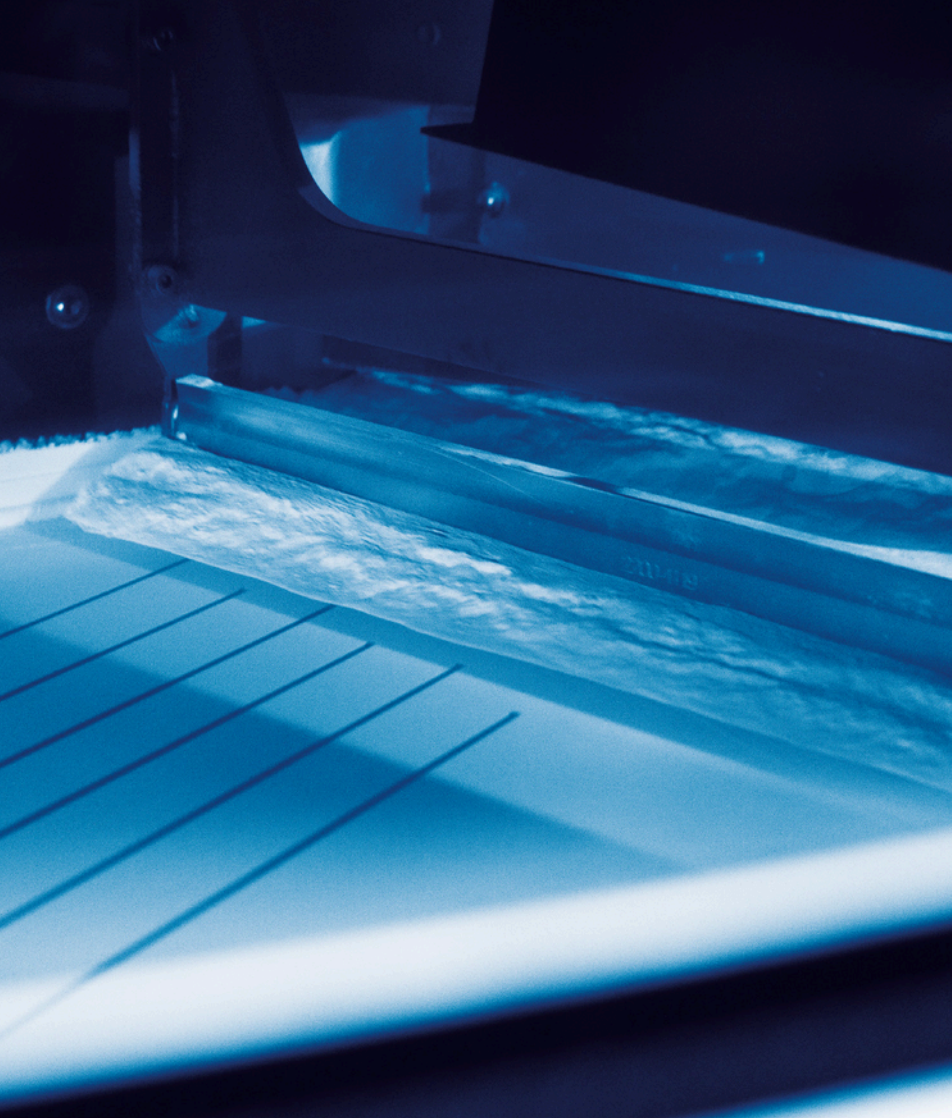

## POWDER BED FUSION

Explore the Ultrasint® line of performance polymers that are perfectly adapted to scaled Additive Manufacturing production for any application.

# Mechanical Properties Comparison

		PP Line	PA11 Line					TPU Line			
		PP 1400 Black	PA11 (Conditioned)	PA11 Black (Conditioned)	PA11 CF (Conditioned)	PA11 rCF (Conditioned)	PA11 ESD (Conditioned)	TPU01 for HP MuF	TPU 88A	TPU 88A Black	TPU 90A LT
HDT A [°C] ISO 75-2		62	76	62	151	182	111	97 <sup>(3)</sup>	98 <sup>(3)</sup>	101,7 <sup>(3)</sup>	
HDT B [°C] ISO 75-2		102	176	177	189	191	186				
Shore A Hardness DIN ISO 7619-1		-	-	-	-	-	-	88-90	88-90	86-88	90
Tensile Strength [MPa] ISO 527-2 (23 °C)	XY	29	45	45	71	69	55	9	8	8	9
	ZX	29	46	45	48	42	47	7	7	5	7
Elongation at Break [%] ISO 527-2 (23 °C)	XY	25	45	42	11	10	22	280 <sup>(1)</sup>	270 <sup>(1)</sup>	360 <sup>(1)</sup>	280 <sup>(1)</sup>
	ZX	25	31	34	17	9	31	150 <sup>(1)</sup>	130 <sup>(1)</sup>	100 <sup>(1)</sup>	120 <sup>(1)</sup>
E Modulus [MPa] ISO 527-2 (23 °C)	XY	1250	1100	1150	4500	4300	2300	85 <sup>(2)</sup>	75 <sup>(2)</sup>	85 <sup>(2)</sup>	110 <sup>(1)</sup>
	ZX	1300	1250	1200	2000	1750	1500	-	-	-	
Charpy Impact Strength (notched) [kJ/m²] ISO 179-1	XY	4,0	8,3	11	6,7	7,2	7,3	No break	No break	No break	No break
	ZX	4,0	4,5	11	4,7	2,7	5,3	No break	No break	No break	No break
Charpy Impact Strength (unnotched) [kJ/m²] ISO 179-1	XY	34	198	No break	63	52	101	-	-	-	-
	ZX	28	85	75	51	38	107	-	-	-	-

(1) DIN 53504, S2

(2) ISO 527-2, 1A

(3) Vicat/A (10 N) / °C - DIN EN ISO 306

(4) Izod Test Method A with notched ASTM D256

# Printer Compatibility

- Compatible
- Open parameter kit required

		PP Line		PA11 Line				TPU Line			
		PP 1400 Black	PA11	PA11 Black	PA11 CF	PA11 rCF	PA11 ESD	TPU01 for HP MJF	TPU 88A	TPU 88A Black	TPU 90A LT
HP	5200 Series							■			
Prodways	P1000 / P1000 S / P1000 X	□	□	□	□	□	□		□	□	□
3D Systems	Sinterstation / Vanguard / sPro 60	■	■	■	■	■	■		■	■	■
Nexa3D	QLS 230 / QLS 236 / QLS 260 / XYZprinting MfgPro Series		■	■	■	■	■		■	■	■
Farsoon	Flight Series	■		■	■	■				■	
	252P Series / 403P Series / eForm	■	■	■	■	■	■		■	■	■
EOS	P1 Series / P3 Series / P7 Series		□	□					□	□	□

# Tests & Certification Summary

- Statement Available
- Test in Progress

		PP Line	PA11 Line					TPU Line			
		PP 1400 Black	PA11	PA11 Black	PA11 CF	PA11 rCF	PA11 ESD	TPU01 for HP MJF	TPU 88A	TPU 88A Black	TPU 90A LT
Product Statements	Skin Contact	■	■					■	■	■	■
	USP Class IV		■								
	Food Contact		■								
	UL Blue Card							■			
Application Specific Testing	Long Term Heat Aging										
	UV Resistance ISO 4892-2	■	■	■				■	■	■	■
	Hydrolysis Resistance							■	■		■
	Air Tightness / Burst Pressure							■	■		
	Temperature Performance High Temperature Mechanicals	■	■		■	■	■	■	■		



		PP Line	PA11 Line					TPU Line			
		PP 1400 Black	PA11	PA11 Black	PA11 CF	PA11 rCF	PA11 ESD	TPU01 for HP MJF	TPU 88A	TPU 88A Black	TPU 90A LT
Electrical	Specific Volume Resistivity IEC 62631-3-1	■	■	■	■	■	■	■			
	Specific Surface Resistivity IEC 62631-3-2	■	■	■	■	■	■				
	Dielectric Strength IEC 60234-1	■	■	■	■	■	■	■			
	CTI IEC 60112										
Flame Retardance	Fatigue Rossflex							■	■	■	■
	Flammability UL 94	■	■	■	■	■	■	■	■		
	Flammability FMVSS 302							■	■		

# Sustainability Summary

- Currently Available
- In Progress

	PP Line	PA11 Line					TPU Line			
	PP 1400 Black	PA11	PA11 Black	PA11 CF	PA11 rCF	PA11 ESD	TPU01 for HP MJF	TPU 88A	TPU 88A Black	TPU 90A LT
Recyclable	■	■	■	■	■	■	■	■	■	■
Refresh Rate (Old/New in %) *	60/40	50/50	50/50	50/50	50/50	50/50	80/20	80/20	80/20	80/20
Take Back Program		■	■				■	■	■	■
Life Cycle Assessment	■	■	■				■	■	■	
Carbon Compensation	■						■	□	□	□

\*Typical value. The exact refresh rate depends on the machine type and printing technology, processing parameters, material usage intensity, packing density, part geometry and individual part property requirements.

**Life Cycle Assessment (LCA):** Study that calculates how much environmental impact is associated with every step of a product. The environmental score for these materials is representative of the stages of “Raw material extraction and production” and “Material preparation for 3D printing”.

**Carbon Compensation:** A strategy to reduce carbon emissions by investing in practices that absorb or mitigate CO2.

**Take Back Program:** The collection of powder and end parts to reduce plastic waste and promote sustainability.

**Refresh Rate:** minimum ratio of fresh / virgin powder one needs to add to your pre-used, unsintered powder to maintain its best printing quality.

# Post-Processing Summary

■ Compatible

	PP Line	PA11 Line					TPU Line			
	PP 1400 Black	PA11	PA11 Black	PA11 CF	PA11 rCF	PA11 ESD	TPU01 for HP MJF	TPU 88A	TPU 88A Black	TPU 90A LT
Chemical Smoothing	■	■	■	■	■	■	■	■	■	■
Ultracur3D® Coat F+		■	■				■	■	■	■
Dyeing		■					■	■		■

# Materials enabled by Forward AM

Available through Printer Manufacturers



HP 3D HR PP



FLEXA Performance  
PA11 Onyx  
PA11 CF  
PA11 ESD

# Ultrasint® PP 1400

## Black



### Technology:

Powder Bed Fusion

### Color:

Black

### Machine Compatibility:

SLS machines equipped with roller recoater

Farsoon - Prodways - 3D Systems - Alternative laser systems (e.g. diode or fiber lasers)



### Easy to Process

Time and cost savings



### Isotropic Behaviour

Facilitates data preparation and gives printing flexibility



### Chemical Resistance

Ideal for media flow and storage parts

# Ultrasint® PP 1400 Black

## Suited for:



Transportation



Industrial



Insoles



Automotive

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

## Technical Specifications

Mechanical properties	Standard	X / Z
Charpy Impact Strength Unnotched (kJ/m <sup>2</sup> )	ISO 179-1	34 / 28
E-Modulus (MPa)	ISO 527-2	1250 / 1300
Tensile Strength (MPa)	ISO 527-2	29 / 29
Elongation at Break (%)	ISO 527-2	25 / 25



Complete TDS

## Post-Processing

### Chemical Smoothing



Read the whitepaper to learn in detail how to surface treat thermoplastic polymer 3D-printed parts and obtain parts with improved airtightness.

Whitepaper available.

### Ultracur3D UV Adhesion Promoter



A solvent-borne UV-Primer to improve the adhesion for rigid 3D-Printing Materials. It is compatible with commercially available topcoats and clearcoats.



## Technology:

Powder Bed Fusion

## Color:

White/Black

## Machine Compatibility:

SLS machines

EOS - Farsoon - Prodways - 3D Systems - XYZprinting



## High Toughness

Able to withstand high mechanical loads and not splinter



## Bio-sourced

Bio-derived from sustainable castor oil



## High Elongation at Break

Elongation at Break up to 45%



# Ultrasint® PA11

## Suited for:



Medical Applications



Industrial



Consumer Goods



Automotive

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

## Technical Specifications

Mechanical properties	Standard	X / Z
Charpy Impact Strength Unnotched (kJ/m²)	ISO 179-1	198 / 85
E-Modulus (MPa)	ISO 527-2	1100 / 1250
Tensile Strength (MPa)	ISO 527-2	45 / 46
Elongation at Break (%)	ISO 527-2	45/31



Complete TDS

## Tests & Certifications

Skin Contact / Biocompatibility	Food Contact
ISO 10993-10	
ISO 10993-5	Statement Available
USP Class IV	

## Post-Processing

### Chemical Smoothing



Both mechanical and chemical smoothing will improve material performance while enhancing the appeal, durability, surface roughness and overall quality.

### Ultracur3D® Coat F+




The Forward AM Ultracur3D® Coat F+ is a flexible waterborn 2k-basecoat designed to offer exceptional flexibility for 3D Printing Materials and enables new possibilities for advanced applications.

### Dyeing



Liquid dyeing ensures that color evenly reaches all surfaces of the parts including small cavities, lattices, and hollowed parts.



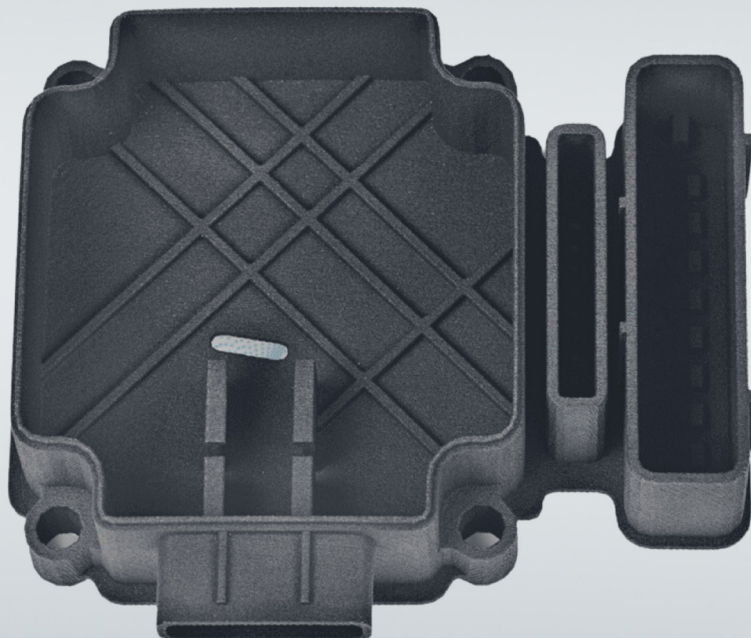

# Ultrasint® PA11 Black

## Technology:

Powder Bed Fusion

## Color:

White/Black

## Machine Compatibility:

SLS machines

EOS - Farsoon - Prodways - 3D Systems - XYZprinting



## High Toughness

Able to withstand high mechanical loads and not splinter



## Bio-sourced

Bio-derived from sustainable castor oil



## High Elongation at Break

Elongation at Break  
up to 45%

# Ultrasint® PA11 Black

## Suited for:



Medical  
Applications



Industrial



Consumer  
Goods



Automotive

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

## Technical Specifications

Mechanical properties	Standard	X / Z
Charpy Impact Strength Unnotched (kJ/m²)	ISO 179-1	no break / 75
E-Modulus (MPa)	ISO 527-2	1150 / 1200
Tensile Strength (MPa)	ISO 527-2	28 / 26
Elongation at Break (%)	ISO 527-2	42 / 34



Complete TDS

## Post-Processing

### Chemical Smoothing



Both mechanical and chemical smoothing will improve material performance while enhancing the appeal, durability, surface roughness and overall quality.

### Ultrasur3D® Coat F+



The Forward AM Ultrasur3D® Coat F+ is a flexible waterborn 2k-basecoat designed to offer exceptional flexibility for 3D Printing Materials and enables new possibilities for advanced applications.



# Ultrasint® PA11 CF

Carbon Fiber

## Technology:

Powder Bed Fusion

## Color:

Black

## Machine Compatibility:

SLS machines

Farsoon - Prodways - 3D Systems



### Carbon-Fiber Reinforced

Excellent for high strength and rigidity applications



### High impact resistance

Charpy impact unnotched up to 63 kJ/m², good option to replace metal parts



### High Strength to Weight Ratio

Key for lightweight structures

# Ultrasint® PA11 CF

## Suited for:



Manufacturing



Industrial



Consumer  
Goods



Automotive

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

## Technical Specifications

Mechanical properties	Standard	X / Z
Charpy Impact Strength Unnotched (kJ/m²)	ISO 179-1	63 / 45
E-Modulus (MPa)	ISO 527-2	4550 / 1700
Tensile Strength (MPa)	ISO 527-2	71 / 37
Elongation at Break (%)	ISO 527-2	11 / 5.2



Complete TDS

## Tests & Certifications

### Bio-sourced

Bio-derived from  
sustainable castor oil

### Thermal Performance

Good heat-ageing  
performance

## Post-Processing

### Chemical Smoothing



Both mechanical and chemical smoothing will improve material performance while enhancing the appeal, durability, surface roughness and overall quality.

### Ultracur3D® Coat F+



The Forward AM Ultracur3D® Coat F+ is a flexible waterborn 2k-basecoat designed to offer exceptional flexibility for 3D Printing Materials and enables new possibilities for advanced applications.



# Ultrasint® PA11 rCF

Carbon Fiber

## Technology:

Powder Bed Fusion

## Color:

Black

## Machine Compatibility:

SLS machines

Farsoon - Prodways - 3D Systems



### Carbon-Fiber Reinforced

Excellent for high strength and rigidity applications



### High impact resistance

Charpy impact unnotched up to 63 kJ/m², good option to replace metal parts



### High Strength to Weight Ratio

Key for lightweight structures



### Recycled Carbon Fiber

# Ultrasint® PA11 rCF

## Suited for:



Manufacturing



Industrial



Consumer  
Goods



Automotive

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

## Technical Specifications

Mechanical properties	Standard	X / Z
E-Modulus (MPa)	ISO 527-2	4300 / 1750
Tensile Strength (MPa)	ISO 527-2	69 / 42
Elongation at Break (%)	ISO 527-2	10 / 9



Complete TDS

## Post-Processing

### Chemical Smoothing




Both mechanical and chemical smoothing will improve material performance while enhancing the appeal, durability, surface roughness and overall quality.

### Ultracur3D® Coat F+



The Forward AM Ultracur3D® Coat F+ is a flexible waterborn 2k-basecoat designed to offer exceptional flexibility for 3D Printing Materials and enables new possibilities for advanced applications.



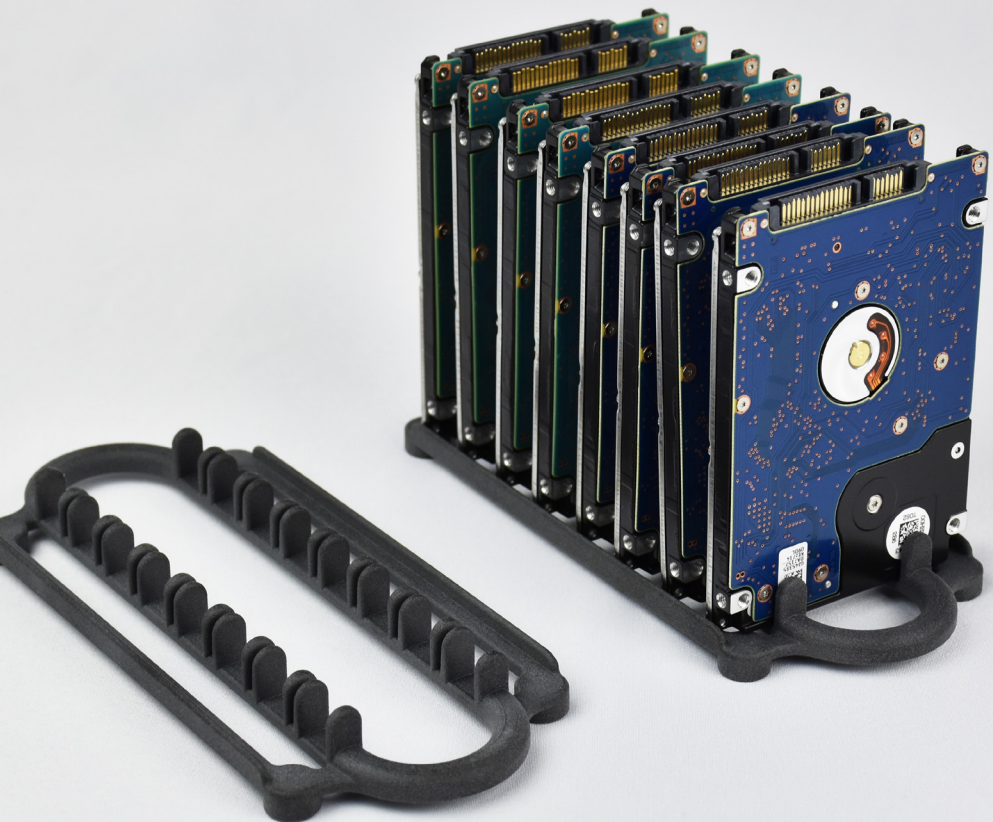

# Ultrasint® PA11 ESD

Electrostatic Safety Discharge

## Technology:

Powder Bed Fusion

## Color:

Gray

## Machine Compatibility:

SLS machines

Farsoon - Prodways - 3D Systems



## High Toughness

Able to withstand high mechanical loads and not splinter



## Electrostatic Safety Discharge

Reduces the risk of electrostatically induced damage or failure



## Bio-sourced

Bio-derived from sustainable castor oil

# Ultrasint® PA11 ESD

## Suited for:



Electronics



Industrial



Robotics



Automotive

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	X / Z
Charpy Impact Strength Unnotched (kJ/m²)	ISO 179-1	101 / 107
E-Modulus (MPa)	ISO 527-2	2300 / 1550
Tensile Strength (MPa)	ISO 527-2	55 / 47
Elongation at Break (%)	ISO 527-2	22 / 31



Complete TDS

## Tests & Certifications

Electrical Volume & Surface Resistivity	Thermal Performance
IEC 62631-3-1	Good heat-ageing
IEC 62631-3-2	performance

## Post-Processing

### Chemical Smoothing



Both mechanical and chemical smoothing will improve material performance while enhancing the appeal, durability, surface roughness and overall quality.

### Ultrasint3D® Coat F+



The Forward AM Ultrasint3D® Coat F+ is a flexible waterborn 2k-basecoat designed to offer exceptional flexibility for 3D Printing Materials and enables new possibilities for advanced applications.





# Ultrasint® TPU01

## Technology:

Powder Bed Fusion

## Color:

Gray

## Machine Compatibility:

MJF Machines

HP Jet Fusion 5200 Series



## Highly flexible

Shore A 88 hardness



## High Reusability

Up to 80% of powder  
reusability



## Lattice Structures

Enabled by  
BASF Ultrasim®

# Ultrasint® TPU01

## Suited for:



Footwear



Industrial



Sports



Automotive



Medical  
Applications

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

## Technical Specifications

Mechanical properties	Standard	X / Z
Charpy Impact Strength Notched -10°C (kJ/m <sup>2</sup> )	ISO 179-1	46 / 44
E-Modulus (MPa)	ISO 527-2, 1A	85 / 85
Tensile Strength (MPa)	DIN 53504, S2	9 / 7
Elongation at Break (%)	DIN 53504, S2	280 / 150



Complete TDS

## Tests & Certifications

### Skin Contact

ISO 10993-10

& ISO 10993-5

### UV Stability

ISO 4892-2B Cycle 3

ISO 4892-2A Cycle 1

## Post-Processing and Related Services

### Chemical Smoothing



Both mechanical and chemical smoothing will improve material performance while enhancing the appeal, durability, surface roughness and overall quality.


Whitepaper available.

### Ultracur3D® Coat F+



Flexible waterborn 2k-basecoat designed to offer exceptional flexibility for elastic 3D Printing Materials and enables new possibilities for advanced applications.

### Ultrasim® 3D Lattice Design



Lattice engineering unlocks the potential of high-performance materials for any application. Customized lattices can be engineered to specific mechanical properties.

# Ultrasint® TPU 88A



## Technology:

Powder Bed Fusion

## Color:

White

## Machine Compatibility:

All SLS machines

Farsoon - EOS - 3D Systems - XYZprinting



## High Reusability

Up to 80% of powder  
reusability



Excellent  
Surface Quality  
and High Level  
of Detail



## Highly flexible

Shore A 88 hardness

# Ultrasint® TPU 88A

## Suited for:



Footwear



Industrial



Sports



Automotive



Medical  
Applications

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

## Technical Specifications

Mechanical properties	Standard	X / Z
Charpy Impact Strength Notched -10°C (kJ/m²)	DIN EN ISO 179-1	60 / 58
E-Modulus (MPa)	ISO 527-2, 1A	75 / 75
Tensile Strength (MPa)	DIN 53504, S2	8 / 7
Elongation at Break (%)	DIN 53504, S2	270 / 130



Complete TDS

## Tests & Certifications

Skin Contact	UV Stability
ISO 10993-10 & ISO 10993-5	ISO 4892-2B Cycle 3 ISO 4892-2A Cycle 1

## Post-Processing and Related Services

### Chemical Smoothing



Both mechanical and chemical smoothing will improve material performance while enhancing the appeal, durability, surface roughness and overall quality.

### Ultracur3D® Coat F+




The Forward AM Ultracur3D® Coat F+ is a flexible waterborn 2k-basecoat designed to offer exceptional flexibility for 3D Printing Materials and enables new possibilities for advanced applications.

### Dyeing



Liquid dyeing ensures that color evenly reaches all surfaces of the parts including small cavities, lattices, and hollowed parts.

### Ultrasim® 3D Lattice Design



Lattice engineering unlocks the potential of high-performance materials for any application. Customized lattices can be engineered to specific mechanical properties.



# Ultrasint® TPU 88A Black

## Technology:

Powder Bed Fusion

## Color:

Black

## Machine Compatibility:

SLS machines including Desktop Machines

EOS - Farsoon - XYZprinting - 3D Systems



**Suitable for  
Desktop  
Machines**



**High Reusability**  
Up to 80% of powder  
reusability



**High Elasticity  
and Rebound**

Elongation at Break

- up to 360%

# Ultrasint® TPU 88A Black

Suited for:



Footwear



Industrial



Sports



Automotive



Medical  
Applications

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	X / Z
Charpy Impact Strength Notched -30°C (kJ/m²)	DIN EN ISO 179-1	No break / No break
E-Modulus (MPa)	ISO 527-2, 1A	85/85
Tensile Strength (MPa)	DIN 53504, S2	8/5
Elongation at Break (%)	DIN 53504, S2	360/100



Complete TDS

## Tests & Certifications

UV Stability

Skin Contact

ISO 4892-2A Cycle 1

ISO 10993-10  
& ISO 10993-5

## Post-Processing

Chemical Smoothing



Read the whitepaper to learn in detail how to surface treat thermoplastic polymer 3D-printed parts and obtain parts with improved airtightness.

Whitepaper available.

Ultracur3D® Coat F+



Flexible waterborn 2k-basecoat designed to offer exceptional flexibility for elastic 3D Printing Materials and enables new possibilities for advanced applications.



# Ultrasint® TPU 90A LT

---

## Technology:

Powder Bed Fusion

## Color:

White

## Machine Compatibility:

All SLS machines

Farsoon - EOS - 3D Systems - XYZprinting

---



Lightweight



High Rebound



Highly flexible

# Ultrasint® TPU 90A LT

## Suited for:



Footwear



Industrial



Sports



Automotive



Medical  
Applications

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

## Technical Specifications

Mechanical properties	Standard	X / Z
Tensile Modulus (MPa)	ISO 527-2, 1A	110
Energy Return (%)	DIN 53512	66
Density (g/kg)	DIN EN ISO 1183-1	1.05
Elongation at Break (%)	DIN 53504, S2	280



Complete TDS

## Tests & Certifications

Cytotoxicity

Passed

## Post-Processing and Related Services

### Chemical Smoothing



Both mechanical and chemical smoothing will improve material performance while enhancing the appeal, durability, surface roughness and overall quality.

### Ultracur3D® Coat F+




The Forward AM Ultracur3D® Coat F+ is a flexible waterborn 2k-basecoat designed to offer exceptional flexibility for 3D Printing Materials and enables new possibilities for advanced applications.

### Dyeing




Liquid dyeing ensures that color evenly reaches all surfaces of the parts including small cavities, lattices, and hollowed parts.

### Ultrasim® 3D Lattice Design



Lattice engineering unlocks the potential of high-performance materials for any application. Customized lattices can be engineered to specific mechanical properties.



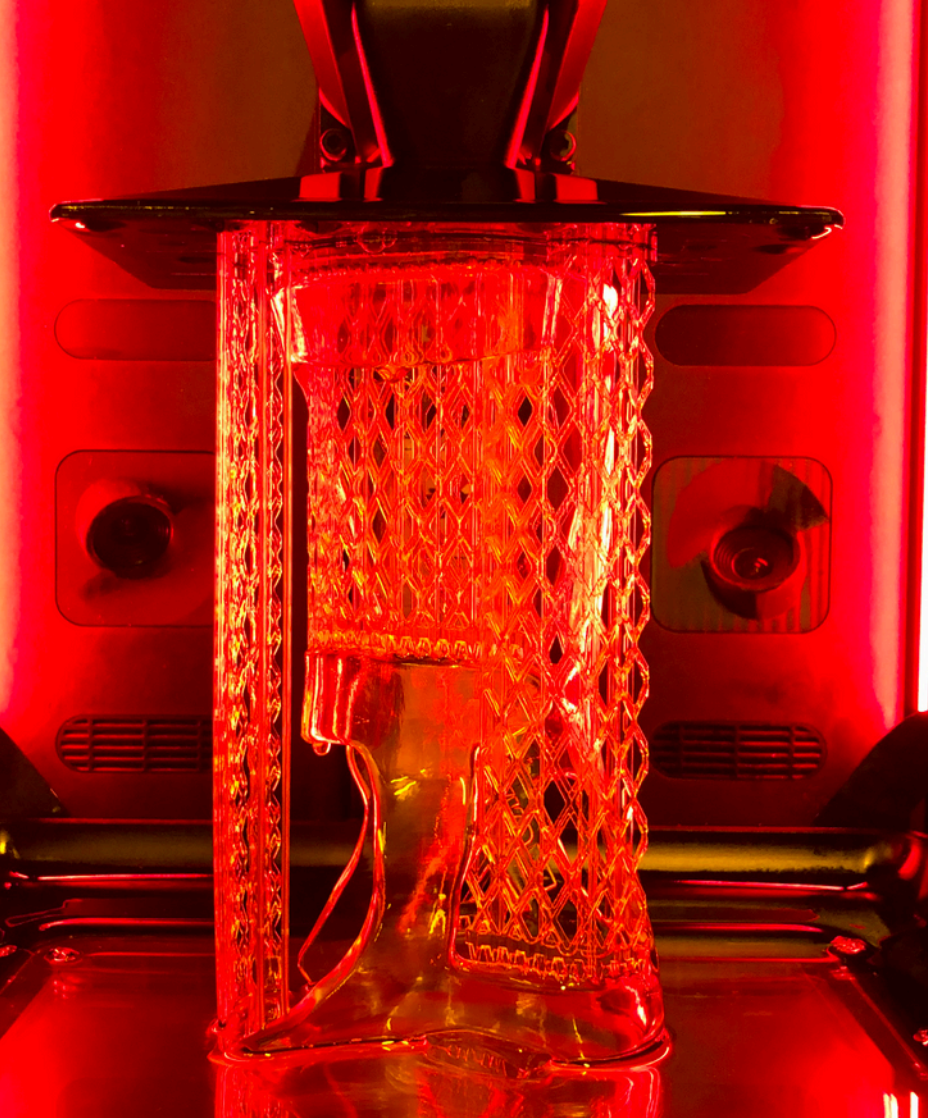

## PHOTOPOLYMERS

Discover the wide range of Ultracur3D®  
reactive urethane photopolymers  
delivering class-leading performance and  
consistency to meet your specific  
application needs.

# Mechanical Properties Comparison

	Tough Line				Rigid Line				Dental Line		
	ST 45	ST 80	ST 1400	ST 7500 G	RG 35	RG 1100	RG 3280*	RG 9400 B FR*	DM 2505	DM 2304	DMD 1005
E Modulus [MPa] ASTM D638 type IV	2300	1500	1900	2300	2600	3080	10 600	3900	2200	-	2710
Tensile Strength [MPa] ASTM D638 type IV	60	35	45	54	80	70	87	78	48	4 <sup>(1)</sup>	60
Elongation at Break [%] ASTM D638 type IV	25	20	43	13	6	5	1.3	3	4	160	4
Flexural Modulus [MPa] ASTM D790	2400	1700	1540	2150	2400	2880	8780	3400	2150	-	2400
Flexural Strength [MPa] ASTM D790	110	60	80	95	110	119	73	115	83	-	85
Impact Strength Izod Notched [J/m] ASTM D256	30	24	43	25	23	16	24	20	15	-	1.6
Hardness ASTM D2240	80 D	80 D	78 D	82 D	85 D	85 D	96 D	88 D	73 D	50 A	80 D
HDT (0.45 MPa) [°C] ASTM D648	73	46	57	64	83	116	284	255	69	-	93
HDT (1.82 MPa) [°C] ASTM D648	61	42	48	54	64	84	132	86	55	-	73
Flammability UL 94 1.5 mm	HB	-	-	-	HB	HB	HB <sup>(1,8)</sup>	V-0 <sup>(2&amp;3)</sup>	-	-	-
Viscosity - 25 °C [mPas] Cone/Plate Rheometer	320	600	390	180	900	275	300	830	100	200	150
Tear Strength - Graves [N/mm] ASTM D624 type C	-	-	-	-	-	-	-	-	-	-	-
Rebound Resilience [%] ASTM D7121	-	-	-	-	-	-	-	-	-	-	-

\* Mechanical properties with regular UV post-curing and additional thermal post-curing available

Flexible / Elastomeric Line					Engineering Plastic Daylight Line				
FL 300	FL 60	EL 60	EL 150	EL 4000	EPD 1006	EPD 1086	EPD 2006	EPD 3500	EPD 4006
-	-	-	-	-	1500	1810	2370	2500	1800
5 <sup>(1)</sup>	4 <sup>(1)</sup>	9 <sup>(1)</sup>	7 <sup>(1)</sup>	11 <sup>(1)</sup>	40	42	50	60	45
245 <sup>(1)</sup>	90 <sup>(1)</sup>	95 <sup>(1)</sup>	182 <sup>(1)</sup>	170 <sup>(1)</sup>	25	26	10	18	45
-	-	-	-	-	1460	1620	2210	2400	1600
-	-	-	-	-	52	67	90	110	70
-	-	-	-	-	35	28	11	25	46
40 A	60 A	75 A	80 A	90 A	79 D	81 D	80 D	79 D	78 D
-	-	-	-	-	44	53	81	70	54
-	-	-	-	-	40	46	61	57	43
-	-	-	-	-	HB	HB	HB	-	HB <sup>(3)</sup>
200	500	4900	120	470	1500	580	460	900	430
9	9	18	14	37	-	-	-	-	-
16	11	21	28	30	-	-	-	-	-

(1) ASTM D412 C

(3) UL 94 3 mm

# Tests & Certification Summary

■ Test Completed

	Tough Line				Rigid Line				Dental Line			Flexible / Elastomeric Line					Engineering Plastic Daylight Line				
	ST 45	ST 80	ST 1400	ST 7500 G	RG 35	RG 1100	RG 9400 B FR	RG 3280	DM 2505	DM 2304	DMD 1005	FL 300	FL 60	EL 60	EL 150	EL 4000	EPD 1006	EPD 1086	EPD 2006	EPD 3500	EPD 4006
Temperature Resistance	□□	□	□	□□	□□	□□□	□□□	□□□	□□		□□						□	□	□□	□□	□
Water Absorption	□	□□□	□□□	□□□	□□□	□□□	□□□	□□□	□□	□□	□□□	□□	□□	□□□	□	□	□□□	□□□	□□□	□□□	□□□
Chemical Resistance	□□	□□□		□□□	□□□	□□□	□□□	□□□				□□		□□	□□	□□		□□□	□□□	□□	□□
UV Resistance	□□	□□□	□□	□□□	□□	□□	□□□	□□				□	□□□		□□	□□□		□□	□□	□□	□□
Flammability	■				■	■	■	■									■	■	■		■
Biocompatibility	■	■	■	■	■	■		■				■		■	■	■	■		■		■
Sterilization	■	■	■		■	■		■					■	■							

# Printer Compatibility

## LEGEND

- Validated, available via Forward AM
- Validated, available via machine manufacturer
- Preliminary

	DM 2304	DM 2505	EL 60	EL 150	EL 4000	EL 4000 B	FL 60	FL 300	RG 35	RG 35 B	RG 1100	RG 1100 B	RG 3280	RG 9400 B FR	ST 45	ST 45 B	ST 45 M	ST 80	ST 80 B	ST 80 G	ST 80 W	ST 1400	ST 7500 G
Asiga® - MAX X27, MAX X35, MAX X43, MAX UV, PRO 4K 45, PRO 4K 65, PRO 4K 80	●	●		●		●		●	●	●	●	●	●	●		●	●	●			●		○
atun3D® - DLP STATION 5, DLP STATION EXZ (405 nm)			●	●	●	●	●			●	●		●	●	●	●		●	●	●	●	●	●
atun3D® - DLP STATION 5 EXZ (365 nm)			●	●		●		●	●	●	●	●		●	●	●		●					
Axtra3D® - Lumia X1			○										●										
Crealiti3D® - LD-002R							●		●						●	●	●	●			●		
Crealiti3D® - Halot One CL-60							○		○							○				○			
Crealiti3D® - Halot Sky-CL-89	●	●			●		●	●	●		●	●	●			●			●	○		●	●
ELEGOO® - Mars 2				○					○							○		○					
ELEGOO® - Mars 2 Pro							○		○						○	○	○						
ELEGOO® - Saturn 2 8K											●				●		●						●
ETEC - Pro XL												●	○	○									
GENERA® - G1										○		●	○	○		○							○
GENERA® - G2, G3		○		●	●	●			●	●	●	●	●	●	●	●		●			●	●	●
Intrepid® - EPIC													●										

# Printer Compatibility

## LEGEND

- Validated, available via Forward AM
- Validated, available via machine manufacturer
- Preliminary

	DM 2304	DM 2505	EL 60	EL 150	EL 4000	EL 4000 B	FL 60	FL 300	RG 35	RG 35 B	RG 1100	RG 1100 B	RG 3280	RG 9400 B FR	ST 45	ST 45 B	ST 45 M	ST 80	ST 80 B	ST 80 G	ST 80 W	ST 1400	ST 7500 G
MiiCraft - Ultra 125 Y (385 nm)	●	●	●		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
MiiCraft - Ultra 125 Y (405 nm)	●	●	●	●	●		●		●	●	●	●	●	●	●	●	●	●		●	●		●
MiiCraft - Prime 150 (405 nm)										●					●	●						●	●
Nexa3D® - NXE 200, NXE 400		●							●	●	○	●	●		●	●	●						
Nexa3D® - XiP										●		●	●	●	●		●						
Nexa3D® - XiP Pro												●	●	●									
Photocentric® - LC Opus		●			●		●		●		●		○			●	●	●				●	
Phrozen® - Sonic Mini 4K, Sonic Mini 8K		●				●	●					●	●	●									●
Phrozen® - Sonic 2022 XL									●	●						●	●		●	●	●		●
Phrozen® - Sonic Mega 8K	●	●			●							●	○										
Prusa® - Original Prusa SL1									●						●	●	●	●		●	●		
Prusa® - Original Prusa SL1S				○				○	○						○		○	○	○	○		○	

# Printer Compatibility

## LEGEND

- Validated, available via Forward AM
- Validated, available via machine manufacturer
- Preliminary

	DM 2304	DM 2505	EL 60	EL 150	EL 4000	EL 4000 B	FL 60	FL 300	RG 35	RG 35 B	RG 1100	RG 1100 B	RG 3280	RG 9400 B FR	ST 45	ST 45 B	ST 45 M	ST 80	ST 80 B	ST 80 G	ST 80 W	ST 1400	ST 7500 G	
Raise3D® - DF2												●	●											
RapidShape® - i30+		●	●	●	●		●		●		●	●	●		●				●			●	●	●
RapidShape® - i50+			●	●			○		●	●	●	●	●	●	●	●			●					●
RapidShape® - i100+				○							●	●	●	○	●	●								●
Rayshape® - Shape 1+													●	●										
Shining 3D® - AccuFab-L4K	●	●		●	●	●	●		●	●	●	●			●	●			●	●	●	●	●	●
Stratasys® - Origin® One		●	●	●	●		●	●	●	●	●	●	●	●	●	●			●				●	○
Tangible Engineering® - Solidator 8K V4				●		●		●			○	●	●	○		●								
UnionTech® - Cute 300	○	○	○	●	○		●	○		●		●	●		○	●			○				○	
UnionTech® - Pi 200		○																						
UnionTech® - Martrix 190						●						○												●
Zortrax® - Inkspire 2			●	●	●	○	●		●	●	●	●	●	○	●	●			●	●	●	○	●	●







# Ultracur3D® RG 35

Rigid Line

Technology:

LCD (incl. MSLA) & DLP

Color:

Clear & Black



Very high  
stiffness & high  
temperature  
resistance



High accuracy  
and low  
shrinkage



Low water  
uptake



Easy to polish

# Ultracur3D® RG 35

## Suited for:



Automotive  
housings



Jigs and  
fixtures



Molds and  
inserts



Electrical  
castings

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638 type IV	2600
Tensile Strength (MPa)	ASTM D638 type IV	80
Heat Deflection Temperature (°C)	ASTM D648	83
Hardness (Shore D)	ASTM D2240	85



Complete TDS

## Tests & Certifications

Flammability	Skin Contact	UV Stability	Sterilization	Chemical Resistance
UL 94 1.5mm	ISO 10993-5; ISO 10993-10; ISO 10993-11	ISO 4892-2A Cycle 1	Dataset available	Dataset available

## Complementary Products

### Ultracur3D® Cleaner




Cleaning solution for removal of any uncured photopolymer resin from printed parts

### Ultracur3D® Color Kit



Color kit solution enabling parts in a wide range of colors without the need for post-processing


### Ultracur3D® Coat F+



Flexible coating solution to improve part properties and appearance

# Ultracur3D® RG 1100

Rigid Line

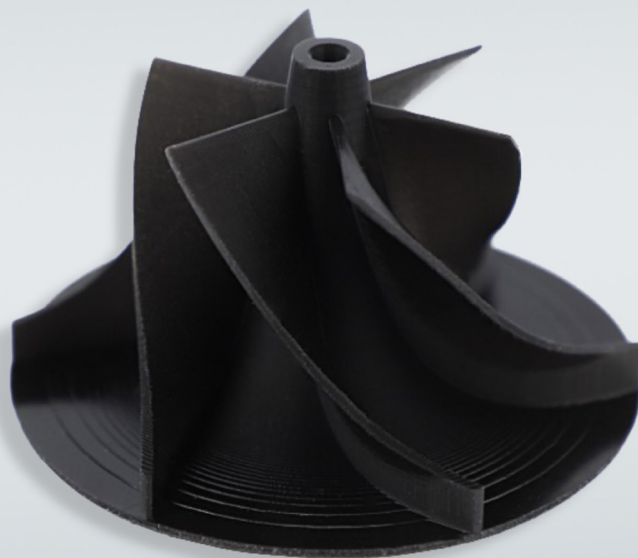

Technology:

LCD (incl. MSLA) & DLP

Color:

Clear & Black



Very high  
stiffness



Impressive  
all-round  
temperature  
resistance



Very high  
chemical  
resistance and  
low water uptake

# Ultracur3D® RG 1100

## Suited for:



Automotive  
connectors



Engineering  
parts



Brackets and  
housings

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

## Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638 type IV	3080
Tensile Strength (MPa)	ASTM D638 type IV	70
Heat Deflection Temperature (°C)	ASTM D648	116
Water Absorption, 24h (%)	ASTM D570	0.32



Complete TDS

## Tests & Certifications

Flammability	UV Stability	Sterilization	Chemical Resistance	Skin Contact
UL 94 1.5 mm	ISO 4892-2A Cycle 1	Dataset available	Dataset available	ISO 10993-5
Pressure & Temperature Resistance				
Dataset available				

## Complementary Products

### Ultracur3D® Cleaner



Cleaning solution  
for removal of  
any uncured  
photopolymer  
resin from printed  
parts


### Ultracur3D® Color Kit



Color kit solution  
enabling parts  
in a wide range  
of colors without  
the need for  
post-processing

# Ultracur3D® RG 3280

Rigid Line

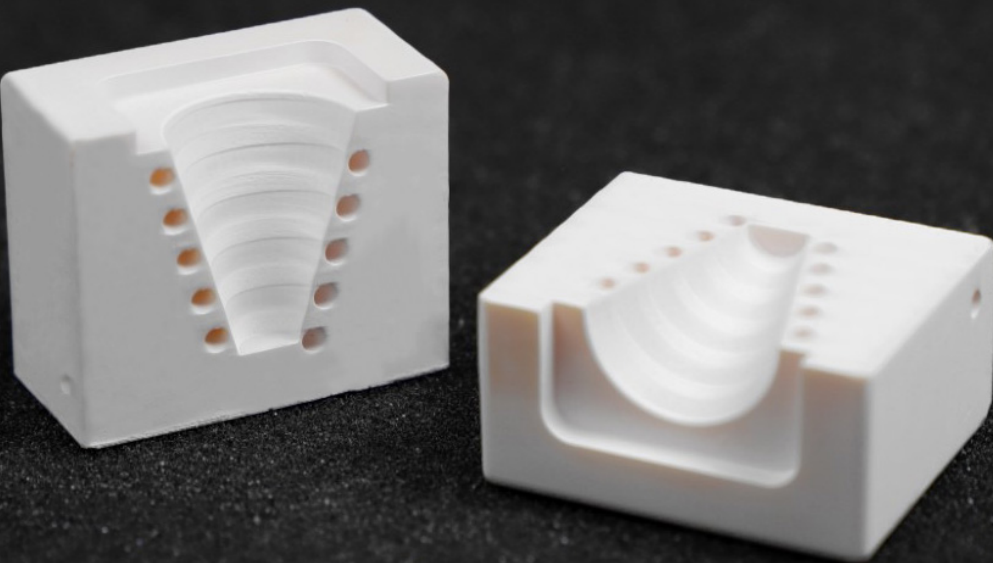

Technology:

LCD (incl. MSLA) & DLP

Color:

White, ceramic-like



Superior  
stiffness



Superior  
temperature  
performance



Fast and easy to  
print



High suspension  
stability

# Ultracur3D® RG 3280

## Suited for:



Tooling



Molding

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

## Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638 type IV	10 600
Tensile Strength (MPa)	ASTM D638 type IV	87
Heat Deflection Temperature (°C)	ASTM D648	284
Viscosity, 25°C (mPas)	Cone/Plate Rheometer	300



Complete TDS

## Tests & Certifications

Chemical Resistance	Skin Contact	Sterilization
Dataset available	ISO 10993-5	Dataset available

# Ultracur3D® RG 9400 B FR

Rigid Line



Technology:

LCD (incl. MSLA) & DLP

Color:

Black



UL 94 V0 flame  
retardancy



Superior  
temperature  
performance



Easy to print and  
process



Halogen Free



# Ultracur3D®

## RG 9400 B FR

Suited for:



Electronics



Housings

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

## Technical Specifications

Mechanical properties	Standard	Value
Flammability	UL 94 (2mm)	V-0
Heat Deflection Temperature (°C)	ASTM D648 type IV	255
Young's Modulus (MPa)	ASTM D638	3940
Viscosity, 25°C (mPa)	Cone/Plate Rheometer	830



Complete TDS

## Tests & Certifications

Flammability	Chemical Resistance	Skin Contact
UL 94 (V0 at 2mm)	Dataset available	ISO 10993-5

## Complementary Products

### Ultracur3D® Cleaner



Cleaning solution  
for removal of  
any uncured  
photopolymer  
resin from printed  
parts

# Ultracur3D® ST 45

Tough Line

Technology:

LCD (incl. MSLA) & DLP

Color:

Clear & Black



High strength,  
toughness  
and impact  
resistance



Very fast printing  
and great  
surface finishing



Lower curing  
depth for higher  
z-resolution (for  
ST 45 M)

# Ultracur3D® ST 45

## Suited for:



Housings



Prototyping



High detail & textured parts



Customized gadgets and tools

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638 type IV	2300
Tensile Strength (MPa)	ASTM D638 type IV	60
Heat Deflection Temperature (°C)	ASTM D648	73
Hardness (Shore D)	ASTM D2240	80



Complete TDS

## Tests & Certifications

Flammability	Skin Contact	UV Stability	Sterilization	Chemical Resistance
UL 94 1.5 mm	ISO 10993-5; ISO 10993-10	ISO 4892-2B Cycle 1	Dataset available	Dataset available

## Complementary Products

### Ultracur3D® Cleaner



Cleaning solution for removal of any uncured photopolymer resin from printed parts

### Ultracur3D® Color Kit



Color kit solution enabling parts in a wide range of colors without the need for post-processing

### Ultracur3D® Coat F+



Flexible coating solution to improve part properties and appearance

Tough Line



## Technology:

LCD (incl. MSLA) & DLP

## Color:

Clear, Black, White, &  
Grey



Well-balanced  
multi-purpose  
material



High toughness  
and impact  
resistance



Most cost-  
effective solution



UV stability

# Ultracur3D® ST 80

## Suited for:



Electrical  
castings



Orthopedics



High detail &  
textured parts



Consumer  
goods and  
tools

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638 type IV	1500
Impact Strength, Notched Izod, 23°C (J/m)	ASTM D256	24
Elongation at Break (%)	ASTM D638 type IV	20
Hardness (Shore D)	ASTM D2240	80



Complete TDS

## Tests & Certifications

Skin Contact	UV Stability	Sterilization	Chemical Resistance
ISO 10993-5; ISO 10993-10	ISO 4892-2A Cycle 1	Dataset available	Dataset available

## Complementary Products

### Ultracur3D® Cleaner



Cleaning solution  
for removal of  
any uncured  
photopolymer  
resin from printed  
parts

### Ultracur3D® Color Kit



Color kit solution  
enabling parts  
in a wide range  
of colors without  
the need for  
post-processing



# Ultracur3D® ST 1400

Tough Line

Technology:

LCD (incl. MSLA) & DLP

Color:

Clear



Outstanding  
toughness  
and impact  
resistance



Bridge between  
flexible and rigid  
materials



Low viscosity  
and fast printing

# Ultracur3D® ST 1400

Suited for:



Housings



Prototyping



Orthopedics



Medical  
applications

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value
Water Absorption, 24h (%)	ASTM D570	0.33
Impact Strength, Notched Izod, 23°C (J/m)	ASTM D256	43
Elongation at Break (%)	ASTM D638 type IV	43
Young's modulus (MPa)	ASTM D638 type IV	1900



Complete TDS

## Tests & Certifications

Skin Contact	UV Stability	Sterilization
ISO 10993-5 ISO 10993-10	ISO 4892-2A Cycle 1	Dataset available

## Complementary Products

### Ultracur3D® Cleaner



Cleaning solution  
for removal of  
any uncured  
photopolymer  
resin from printed  
parts

### Ultracur3D® Color Kit



Color kit solution  
enabling parts  
in a wide range  
of colors without  
the need for  
post-processing



# Ultracur3D® ST 7500 G

Tough Line

Technology:

LCD (incl. MSLA) & DLP

Color:

Grey



Surface quality  
and details



Durability and  
toughness



Fast and easy  
printing



# Ultracur3D® ST 7500 G

Suited for:



Figurines



Functional  
Prototypes

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

## Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638 type IV	2300
Elongation at Break (%)	ASTM D638 type IV	13
Water Absorption, 24h (%)	ASTM D570	0.9
Viscosity, 25°C (mPas)	Cone/Plate Rheometer	180



Complete TDS

## Tests & Certifications

UV Stability	Skin Contact	Chemical Resistance	Pressure & Temperature Resistance
ISO 4892-2A Cycle 1	ISO 10993-5 ISO 10993-10	Dataset available	Dataset available

## Complementary Products

### Ultracur3D® Cleaner



Cleaning solution  
for removal of  
any uncured  
photopolymer  
resin from printed  
parts

# Ultracur3D® FL 300

Flexible / Elastomeric Line

Technology:

LCD (incl. MSLA) & DLP

Color:

Clear



Very low  
hardness  
(Shore 40 A)



Superior  
elongation at  
break

# Ultracur3D® FL 300

## Suited for:



Footwear



Prototyping



Energy  
damping



Cushioning  
pads



Flexible grips

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value
Rebound Resilience (%)	ASTM D7121	16
Tear Strength, Graves (N/mm)	ASTM D624 type C	9
Elongation at Break (%)	ASTM D412 C	245
Hardness (Shore A)	ASTM D2240	40



Complete TDS

## Tests & Certifications

Rossifex	Skin Contact	Chemical Resistance	UV Stability
ASTM D1052	ISO 10993-10	Dataset available	ISO 4892-2A Cycle 1

## Complementary Products

### Ultracur3D® Cleaner



Cleaning solution for removal of any uncured photopolymer resin from printed parts

### Ultracur3D® Color Kit



Color kit solution enabling parts in a wide range of colors without the need for post-processing

### Ultracur3D® Coat F+



Flexible coating solution to improve part properties and appearance



# Ultracur3D® FL 60

Flexible / Elastomeric Line

Technology:

LCD (incl. MSLA) & DLP

Color:

Clear



Very low  
hardness  
(Shore 60 A)



Very good  
haptics



Very stable  
clear-white color



# Ultracur3D® FL 60

## Suited for:



Footwear



Functional  
prototyping



Flexible grips



Cushioning  
pads

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value
Rebound Resilience (%)	ASTM D7121	11
Tear Strength, Graves (N/mm)	ASTM D624 type C	9
Elongation at Break (%)	ASTM D412 C	90
Hardness (Shore A)	ASTM D2240	60



Complete TDS

## Tests & Certifications

Sterilization

UV Stability

Dataset available

ISO 4892-2A Cycle 1

## Complementary Products

### Ultracur3D® Cleaner




Cleaning solution for removal of any uncured photopolymer resin from printed parts

### Ultracur3D® Color Kit



Color kit solution enabling parts in a wide range of colors without the need for post-processing

### Ultracur3D® Coat F+



Flexible coating solution to improve part properties and appearance

# Ultracur3D® EL 60

Flexible / Elastomeric Line

Technology:

LCD (incl. MSLA) & DLP

Color:

Clear



Low hardness  
(Shore 75 A)



Quick elastic  
response



Easy to print





# Ultracur3D® EL 60

## Suited for:



Footwear



Functional  
prototyping



Flexible grips



Cushioning  
pads

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value
Rebound Resilience (%)	ASTM D7121	21
Elongation at Break (%)	ASTM D412 C	95
Water Absorption, 24h (%)	ASTM D570	1.12%
Hardness (Shore A)	ASTM D2240	75



Complete TDS

## Tests & Certifications

Sterilization	Skin Contact	Rosflex	Chemical Resistance
Dataset available	ISO 10993-5 ISO 10993-10	ASTM D1052	Dataset available

## Complementary Products

### Ultracur3D® Cleaner




Cleaning solution for removal of any uncured photopolymer resin from printed parts

### Ultracur3D® Color Kit



Color kit solution enabling parts in a wide range of colors without the need for post-processing

### Ultracur3D® Coat F+



Flexible coating solution to improve part properties and appearance



# Ultracur3D® EL 150

Flexible / Elastomeric Line

---

Technology:

LCD (incl. MSLA) & DLP

Color:

Clear

---



Medium  
Hardness  
(Shore 80 A)



Optimum  
combination of  
high strength,  
elongation  
at break and  
rebound

# Ultracur3D® EL 150

Suited for:



Footwear



Prototyping



Flexible grips



Cushioning  
pads

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value
Rebound Resilience (%)	ASTM D7121	28
Tear Strength, Graves (N/mm)	ASTM D624 type C	14
Elongation at Break (%)	ASTM D412 C	182
Hardness (Shore A)	ASTM D2240	80



Complete TDS

## Tests & Certifications

Rosflex	Skin Contact	UV Stability	Chemical Resistance
ASTM D1052	ISO 10993-10	ISO 4892-2A Cycle 1	Dataset available

## Complementary Products

### Ultracur3D® Cleaner




Cleaning solution for removal of any uncured photopolymer resin from printed parts

### Ultracur3D® Color Kit



Color kit solution enabling parts in a wide range of colors without the need for post-processing

### Ultracur3D® Coat F+



Flexible coating solution to improve part properties and appearance

# Ultracur3D® EL 4000

Flexible / Elastomeric Line

Technology:

LCD (incl. MSLA) & DLP

Color:

Clear & Black



High hardness  
(Shore 90 A)



Ideal for printing  
intricate flexible  
parts



Superior  
strength,  
rebound and  
tear resistance

# Ultracur3D® EL 4000

## Suited for:



Footwear



Bike saddle



Cushioning pads

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

## Technical Specifications

Mechanical properties	Standard	Value
Elongation at Break (%)	ASTM D412 C	170
Hardness (Shore A)	ASTM D2240	90
Rebound Resilience (%)	ASTM D7121	30
Tear Strength, Graves (N/mm)	ASTM D624 type C	37



Complete TDS

## Tests & Certifications

Rossflex	UV Stability	Chemical Resistance	Skin Contact
ASTM D1052	ISO 4892-2A Cycle 1	Dataset available	ISO 10993-5

## Complementary Products

### Ultracur3D® Cleaner



Cleaning solution for removal of any uncured photopolymer resin from printed parts

### Ultracur3D® Color Kit



Color kit solution enabling parts in a wide range of colors without the need for post-processing



# Ultracur3D® DM 2505

## Dental Line

---

### Technology:

LCD (incl. MSLA) & DLP

### Color:

Beige

---



Precise  
manufacturing  
of dental models  
and molds



Ideal for  
thermoforming



Parts can be  
washed with  
water



# Ultracur3D® DM 2505

Suited for:



Dental  
models and  
molds

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638 type IV	2200
Tensile Strength (MPa)	ASTM D638 type IV	48
Viscosity, 25°C (mPas)	Cone/Plate Rheometer	100
Hardness (Shore D)	ASTM D2240	73



Complete TDS

## Tests & Certifications

Accuracy

Pressure & Temperature Resistance

High printing and  
thermoforming accuracy

Dataset available

## Complementary Products

### Ultracur3D® Cleaner



Cleaning solution  
for removal of  
any uncured  
photopolymer  
resin from printed  
parts



# Ultracur3D® DM 2304

Dental Line

Technology:

LCD (incl. MSLA) & DLP

Color:

Pink



Optimized  
for producing  
gingiva masks



Highly flexible  
and very soft



# Ultracur3D® DM 2304

Suited for:



Non-Medical  
Gingiva Mask

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value
Elongation at Break (%)	ASTM D412 C	160
Tensile Strength (MPa)	ASTM D412 C	4
Viscosity, 25°C (mPas)	Cone/Plate Rheometer	200
Hardness (Shore A)	ASTM D2240	50



Complete TDS

## Tests & Certifications

### Accuracy

High printing and  
thermoforming accuracy

## Complementary Products

### Ultracur3D® Cleaner



Cleaning solution  
for removal of  
any uncured  
photopolymer  
resin from printed  
parts

# Ultracur3D® DMD 1005

Dental Line

Technology:

LCD Photo<sup>centric</sup>

Color:

Beige



Ideal for  
economic and  
large-scale  
production




Suitable for  
thermoforming



Good printing  
accuracy

# Ultracur3D® DMD 1005

Suited for:



Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638 type IV	2710
Tensile Strength (MPa)	ASTM D638 type IV	60
Heat Deflection Temperature (°C)	ASTM D648	93
Hardness (Shore D)	ASTM D2240	80



[Complete TDS](#)

## Tests & Certifications

### Accuracy

High printing and  
thermoforming accuracy

## Complementary Products

### Ultracur3D® Cleaner



Cleaning solution  
for removal of  
any uncured  
photopolymer  
resin from printed  
parts



# Ultracur3D® EPD 1006

Daylight Line

Technology:

LCD Photocentric

Color:

Black



Good toughness  
and impact  
resistance



Easy to print,  
nice surface  
finish & intricate  
geometries



Ideal for  
prototyping, jigs  
and fixtures

# Ultracur3D® EPD 1006

## Suited for:



Prototyping



Jigs and  
fixtures



Customized  
gadgets and  
tools



High detail  
and textured  
parts

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638 type IV	1500
Tensile Strength (MPa)	ASTM D638 type IV	40
Elongation at Break (%)	ASTM D638 type IV	25
Impact Strength, Notched Izod, 23°C (J/m)	ASTM D256	35



Complete TDS

## Tests & Certifications

Flammability	Skin Contact
UL 94 1.5 mm	ISO 10993-5

## Complementary Products

### Ultracur3D® Cleaner



Cleaning solution  
for removal of  
any uncured  
photopolymer  
resin from printed  
parts

# Ultracur3D® EPD 1086

Daylight Line



Technology:

LCD Photocentric

Color:

Black



Well-balanced  
mechanical  
properties



Cost-effective  
solution for a  
wide range of  
applications



# Ultracur3D® EPD 1086

## Suited for:



High detail  
and textured  
parts



Customized  
gadgets and  
tools

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

## Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638 type IV	1810
Tensile Strength (MPa)	ASTM D638 type IV	42
Elongation at Break (%)	ASTM D638 type IV	26
Hardness (Shore D)	ASTM D2240	81



Complete TDS

## Tests & Certifications

Flammability	UV Stability	Chemical Resistance
UL 94 1.5 mm	ISO 4892-2A Cycle 1	Dataset available

## Complementary Products

### Ultracur3D® Cleaner



Cleaning solution  
for removal of  
any uncured  
photopolymer  
resin from printed  
parts

# Ultracur3D® EPD 2006

Daylight Line

Technology:

LCD Photocentric

Color:

Black



Very high  
stiffness and  
temperature  
resistance



Ideal for large-  
scale objects



Printed parts  
exhibit intricate  
detail



# Ultracur3D® EPD 2006

## Suited for:



High detail  
and textured  
parts



Customized  
gadgets and  
tools

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638 type IV	2370
Tensile Strength (MPa)	ASTM D638 type IV	50
Elongation at Break (%)	ASTM D638 type IV	10.3
Heat Deflection Temperature (°C)	ASTM D648	81



Complete TDS

## Tests & Certifications

Flammability	Skin Contact	UV Stability	Chemical Resistance
UL 94 1.5 mm	ISO 10993-5; ISO 10993-10	ISO 4892-2A Cycle 1	Dataset available

## Complementary Products

### Ultracur3D® Cleaner



Cleaning solution  
for removal of  
any uncured  
photopolymer  
resin from printed  
parts

# Ultracur3D® EPD 3500

Daylight Line

Technology:  
LCD Photocentric

Color:  
Amber



High strength,  
high stiffness  
& good impact  
resistance



Low water  
uptake



Ideal for  
engineering  
prototypes

# Ultracur3D® EPD 3500

## Suited for:



High detail  
and textured  
parts



Customized  
gadgets and  
tools

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638 type IV	2500
Tensile Strength (MPa)	ASTM D638 type IV	60
Elongation at Break (%)	ASTM D638 type IV	18
Impact Strength, Notched Izod, 23°C (J/m)	ASTM D256	25



Complete TDS

## Tests & Certifications

UV Stability	Chemical Resistance
ISO 4892-2A Cycle 1	Dataset available

## Complementary Products

### Ultracur3D® Cleaner



Cleaning solution  
for removal of  
any uncured  
photopolymer  
resin from printed  
parts

# Ultracur3D® EPD 4006

Daylight Line

Technology:  
LCD Photocentric

Color:  
Black




Extremely  
tough & durable  
material



Superior impact  
resistance



Easy to print and  
smooth surface  
finish

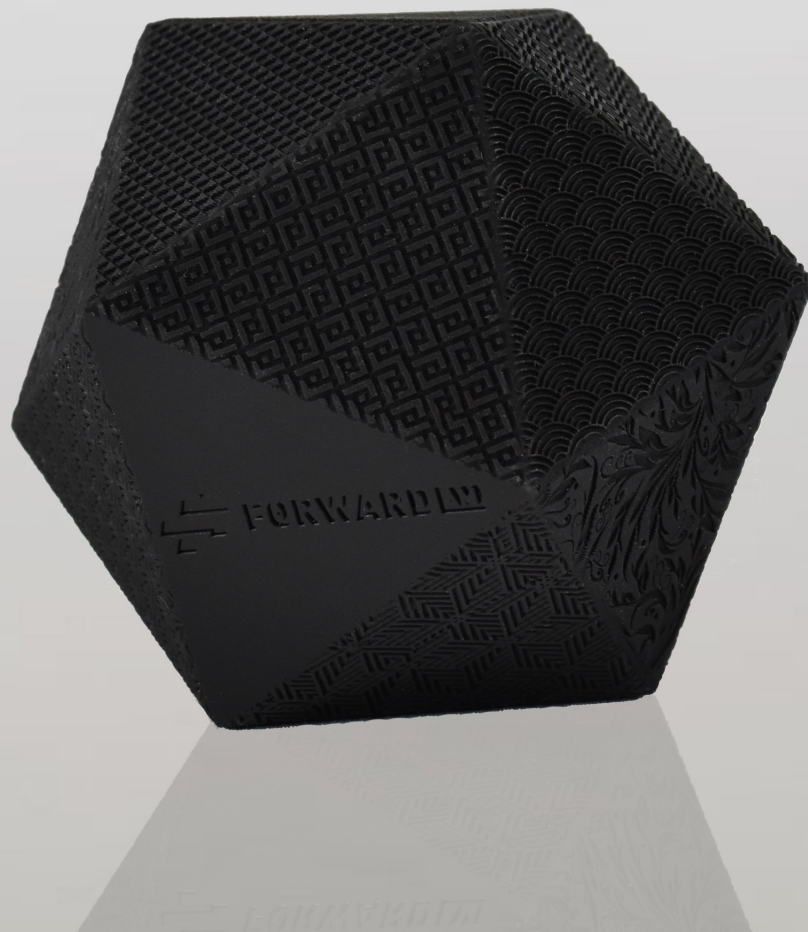

# Ultracur3D® EPD 4006

## Suited for:



High detail  
and textured  
parts



Customized  
gadgets and  
tools

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value
Young's Modulus (MPa)	ASTM D638 type IV	1800
Tensile Strength (MPa)	ASTM D638 type IV	45
Elongation at Break (%)	ASTM D638 type IV	45
Impact Strength, Notched Izod, 23°C (J/m)	ASTM D256	46



Complete TDS

## Tests & Certifications

Flammability	Skin Contact	UV Stability	Chemical Resistance
UL 94 3 mm	ISO 10993-5	ISO 4892-2A Cycle 1	Dataset available

## Complementary Products

### Ultracur3D® Cleaner



Cleaning solution  
for removal of  
any uncured  
photopolymer  
resin from printed  
parts





## **FUSED FILAMENT FABRICATION**

Explore one of the broadest portfolios for Fused Filament Fabrication. Our Ultrafuse® line comprises filaments ranging from engineering-grade materials, through reinforced and support materials, to advanced metal filaments for a variety of industrial applications.

# Mechanical Properties Comparison



Full Comparison Table

		Ultrafuse® Standard Filaments					Ultrafuse® Support Filaments	
		PLA	PET	ABS	PP	rPET	BVOH	HIPS
HDT (0.45 Mpa) [°C] ISO 75-2		65,0	63,0	96,0	54,0	71,0	-	91,0
Tensile Strength [MPa] ISO 527	XY	34,7	33,4	36,3	15,5	38,6	33,7	18,4
	ZX	21,2	17,2	21,3	9,0	14,7	8,7	13,7
Elongation at Break [%] ISO 527	XY	4,2	2,7	7,4	118,6	4,3	14,8	1,4
	ZX	1,2	1,1	1,8	5,4	1,2	0,6	1,3
Young's Modulus [MPa] ISO 527	XY	2308,0	1933,0	1958,0	541,0	1640,0	2339,0	1588,0
	XZ	2131,0	1665,0	1608,0	435,0	1334,0	1426,0	1603,0
Impact Strength Charpy (unnotched) [kJ/m²] ISO 179-2	XY	13,2	18,4	36,4	41,8	55,5	-	36,0
	XZ	14,3	9,7	42,2	62,3	33,7	-	57,6
	ZX	4,3	4,6	6,8	13,6	3,3	-	8,6
Impact Strength Izod (unnotched) [kJ/m²] ISO 180	XY	11,0	12,3	40,0	37,7	48,2	-	35,0
	XZ	9,6	7,7	35,7	37,6	21,9	-	57,1
	ZX	4,7	4,1	7,2	11,6	4,4	-	9,1

Ultrafuse® High Temp Filaments	Ultrafuse® Engineering Filaments					Ultrafuse® Reinforced Filaments				
PPSU	PLA Tough	ABS Fusion+	ASA	PA (Conditioned)	PC/ABS FR	PP GF30	PET CF15	PAHT CF15 (Conditioned)	PA6 GF30 (Conditioned)	PC GF30
215,0	55	91,0	101,0	135,0	86,0	127,0	108,0	128,0	114,0	134,0
74.5	40	29,5	34,6	33,2	50,1	41,7	63,2	62,9	46,4	36,1
49,0	28	17,9	12,0	17,6	17,3	15,9	12,5	19,1	12,2	11,2
7.3	7,4	10,9	4,5	143,3	10,7	4,4	3,7	2,9	3,2	2,4
2.9	2,2	2,1	1,0	12,8	0,8	0,8	0,5	0,8	1,9	1,1
2221,0	2672	1379,0	1828,0	395,0	2545,0	2628,0	6178,0	5052,0	2469,0	2664,0
2150,0	2576	1106,0	1400,0	334,0	2188,0	2242,0	2822,0	2455,0	1156,0	1231,0
224.8	33	71,9	42,7	No break	49,8	23,1	27,8	21,9	41,8	17,1
270.5	34	118,7	41,2	No break	65,4	25,8	32,0	20,4	48,8	18,9
16.3	10	6,9	5,1	13,4	2,9	2,5	1,3	2,8	3,1	3,7
No break	28	73,1	36,8	No break	57,0	20,5	25,1	16,3	36,9	13,9
No break	27	131,1	39,3	No break	87,9	2,4	22,6	15,1	41,4	17,8
21,0	10	6,6	6,8	17,4	3,0	2,6	2,4	4,1	3,8	3,4

		Ultrafuse® Flexible Filaments			
		TPU 85A	TPU 64D	TPU 95A	TPS 90A
Shore A Hardness (3 s) ISO 7619-1		85,0	58 (Shore D)	92,0	89,0
Abrasion Resistance [mm <sup>3</sup> ] ISO 4649		82,0	43,0	64,0	111,0
Compression Set at 23 °C, 72 h [%] ISO 815		26,0	25,0	38,0	75,0
Elongation at Break TPE [%] ISO 527	XY	600,0	399,0	611,0	-
	ZX	320,0	115,0	192,0	-
Stress at Break TPE [MPa] ISO 527	XY	34,0	37,0	44,2	7,0
	ZX	10,0	19,0	12,2	2,0
Tear Strength [kN/m] ISO 34-1	XY	80,0	66,0	90,0	10,0
	XZ	18,0	37,0	8,0	5,0
	ZX	30,0	79,0	14,0	4,0

		Ultrafuse® Metal Filaments	
		316L	17-4 PH
Sintered Part Density [kg/m <sup>3</sup> ] ISO 1183-1		7850,0	7600,0
Elongation at Break [%] ISO 6892-1 <sup>1</sup>	XY	53,0	4,0
	ZX	36,0	4,0
Yield Strength, R <sub>p0.2</sub> [MPa] ISO 6892-1 <sup>1</sup>	XY	251,0	756
	ZX	234,0	764
Vickers Hardness HV10 ISO 6507-1	XY	128	291
	ZX	128	309

# Print Profile Availability

- Available from Forward AM
- Available from machine manufacturer
- To be validated
- X Not compatible

See complete print  
profile availability



	Bambu Lab			Prusa		BCN3D				Ultimaker					Raise3D				Zortrax	
	P1P	P1S	X1-Carbon	Mk3	Mk3s	Sigma R19	Sigmax R19	Epsilon W27	Epsilon W50	2+ Connect	3	S3	S5	S7	E2	Pro2	Pro3	Pro3 hyper speed	M300 Dual	Endureal
rPET	■ HS	■ HS	■ HS	■	■	■	■	■	■	■	□	■	■	■	■	■	■	□	□	□
PLA Tough	■ HS	■ HS	■ HS	■	■	■	■	■	■	■	□	■	■	□	■	■	■	■ HS	□	□
PC/ABS FR	X	X	■ HS	■	■	■	■	■	■	■	□	■	■	■	■	■	■	■ HS	□	■
TPU 64D	□	□	□	■	■	■	■	■	■	■	■	□	■	■	■	■	■	□	□	□
17-4 PH	□	□	□	■	■	□	■	■	■	X	■	■	■	■	X	■	■	X	■	■

# Support Material Compatibility

- Compatible
- To be validated

	Standard					High Temp	Engineering					Reinforced					Flexible				Metal	
	PLA	PET	ABS	PP	rPET	PPSU	PLA Tough	ABS Fusion+	ASA	PA	PC/ABS FR	PP GF30	PET CF15	PAHT CF15	PA6 GF30	PC GF30	TPU 85A	TPU 64D	TPU 95A	TPS 90A	316L	17-4PH
Single Material Breakaway	Compatible	Compatible	Compatible	To be validated	Compatible		Compatible	To be validated	To be validated	To be validated	To be validated	To be validated	Compatible	To be validated	To be validated	To be validated	Compatible	To be validated	To be validated	To be validated		
Ultrafuse® BVOH	Compatible	Compatible		To be validated	Compatible		Compatible	To be validated		Compatible			Compatible	Compatible	Compatible		Compatible	Compatible	Compatible			
Ultrafuse® HiPS	To be validated	To be validated	Compatible	To be validated	To be validated			To be validated	Compatible	To be validated	Compatible	To be validated	Compatible	To be validated	To be validated		Compatible	To be validated	To be validated			
Ultrafuse® Support Layer																					Compatible	Compatible



# Ultrafuse® PLA

## Standard Filaments

### Technology:

Fused Filament Fabrication

### Color:

Natural, Black, White  
+ 22 others



High success  
rate



Repeatability



Relatively  
low printing  
temperatures



Non/extremely  
low warpage/  
shrinkage



# Ultrafuse® PLA

Suited for:



Prototyping

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZY
HDT (0.45 MPa) (°C)	ISO 75-2	65,0
Tensile Strength (MPa)	ISO 527	80
Elongation at Break (%)	ISO 527	4,2 / - / 1,2
Young's Modulus (MPa)	ISO 527	2308 / - / 2131
Impact Strength Izod (notched) (kJ/m²)	ISO 180	3,3 / 2,1 / 1,6
Impact Strength Izod (unnotched) (kJ/m²)	ISO 180	11 / 9,6 / 4,7



Complete TDS

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
210-230	-	50-70	glass	≥0,4	40-80

# Ultrafuse® PET

## Standard Filaments

### Technology:

Fused Filament Fabrication

### Color:

Black, White, Red, Blue  
+ 4 others



Watertight prints  
possible



Easy to print like  
PLA



High resolution  
prints



# Ultrafuse® PET

Suited for:



Food applications



Parts where watertightness is required

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZY
HDT (0.45 MPa) (°C)	ISO 75-2	63,0
Tensile Strength (MPa)	ISO 527	33,4 / - / 17,2
Elongation at Break (%)	ISO 527	2,7 / - / 1,1
Young's Modulus (MPa)	ISO 527	1933 / - / 1665
Impact Strength Izod (notched) (kJ/m²)	ISO 180	2,1 / 1,9 / 1,8
Impact Strength Izod (unnotched) (kJ/m²)	ISO 180	12,3 / 7,7 / 4,1



Complete TDS

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
210-230	-	60-80	glass	≥0,4	40-80



# Ultrafuse® ABS

## Standard Filaments

---

### Technology:

Fused Filament Fabrication

### Color:

White, Blue, Yellow  
+6 others

---



Chemical  
Resistance



Very tough



High wear and  
tear



Can be used for  
working parts

# Ultrafuse® ABS

## Suited for:



Functional  
prototypes



Chemical  
environment



Reasonable  
heat  
resistance

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value <i>XY / XZ / ZX</i>
HDT (0.45 MPa) (°C)	ISO 75-2	96,0
Tensile Strength (MPa)	ISO 527	36,3 / - / 21,3
Elongation at Break (%)	ISO 527	7,4 / - / 1,8
Young's Modulus (MPa)	ISO 527	1958 / - / 1608
Impact Strength Izod (notched) (kJ/m²)	ISO 180	18,8 / 18,9 / 3,5
Impact Strength Izod (unnotched) (kJ/m²)	ISO 180	40 / 35,7 / 7,2



Complete TDS

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
240-260	-	90-110	Tape, spray or glue	≥0,4	40-80

# Ultrafuse® PP

## Standard Filaments

Technology:

Fused Filament Fabrication

Color:

White



Tough and  
Strong



Fatigue  
Resistant



Chemical  
Resistant



Light weight  
(low density)

# Ultrafuse® PP

## Suited for:



Chemical  
contact



Prototyping

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZX
HDT (0.45 MPa) (°C)	ISO 75-2	54,0
Tensile Strength (MPa)	ISO 527	15,5 / - / 9
Elongation at Break (%)	ISO 527	118,6 / - / 5,4
Young's Modulus (MPa)	ISO 527	541 / - / 435
Impact Strength Izod (notched) (kJ/m²)	ISO 180	5,3 / 10,6 / 2,3
Impact Strength Izod (unnotched) (kJ/m²)	ISO 180	37,7 / 37,6 / 11,6



Complete TDS

## Advanced Testing

Skin Contact /  
Biocompatibility

ISO 10993-5; ISO  
10993-10

Passed

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
220-240	-	60-80	PP tape or PP adhesive	≥0,4	20-50





# Ultrafuse® rPET

## Standard Filaments

Technology:

Fused Filament Fabrication

Color:

Blue Transparent



> 99% recycled  
PETG



Easy to print



Great end results

# Ultrafuse® rPET

## Suited for:



Prototyping



Decorative parts



Automotive parts



Consumer Goods

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated July 2024.

## Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZX
HDT (0.45 MPa) (°C)	ISO 75-2	71
Tensile Strength (MPa)	ISO 527	38,6 / - / 14,7
Elongation at Break (%)	ISO 527	4,3 / - / 1,2
Young's Modulus (MPa)	ISO 527	1640 / - /1334
Impact Strength Izod (notched) (kJ/m²)	ISO 180	4,4 / 3,3 /1,5
Impact Strength Izod (unnotched) (kJ/m²)	ISO 180	48,2 / 21,9 /4,4



[Complete TDS](#)

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperture [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
225-245	-	65-85	glass + adhesive spray	≥0,4	30-60

# Ultrafuse® BVOH

## Support Filaments

---

Technology:

Fused Filament Fabrication

Color:

Natural Yellow

---




Water soluble



Dissolves 2  
times faster than  
other PVA



Support  
compatible  
with multiple  
materials

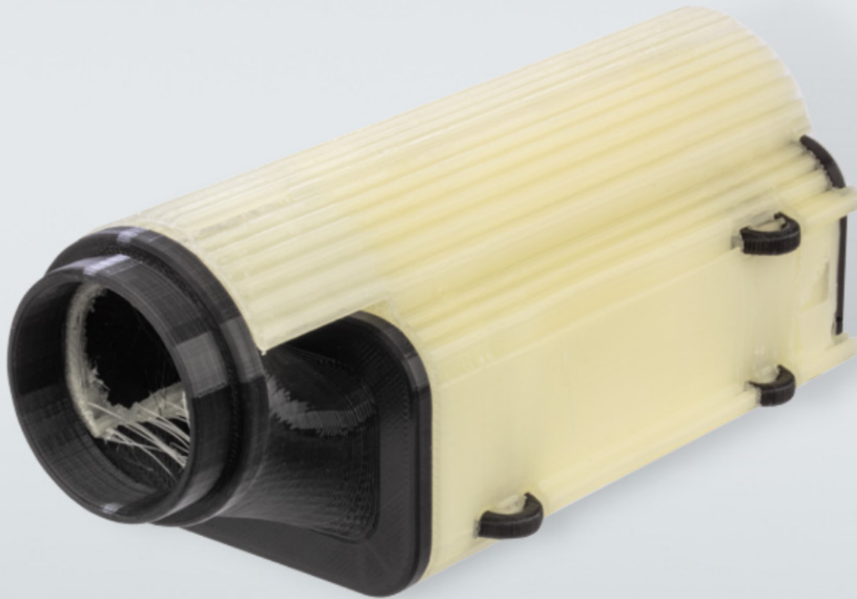

# Ultrafuse® BVOH

## Suited for:



Parts with  
overhang



Complex parts



Hollow parts

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZX
HDT (0.45 MPa) (°C)	ISO 75-2	-
Tensile Strength (MPa)	ISO 527	33,7 / - / 8,7
Elongation at Break (%)	ISO 527	14,8 / - / 0,6
Young's Modulus (MPa)	ISO 527	2339 / - / 1426



[Complete TDS](#)

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
190-210	-	60-100	glass	≥0,4	30-60

## Support Filaments

---

Technology:

Fused Filament Fabrication

Color:

White

---



Easy post  
processing  
(Glue and painting)



Good aesthetics



Compatible with  
many materials



# Ultrafuse® HiPS

Suited for:



Support  
material  
for printing  
applications  
with ABS

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZX
HDT (0.45 MPa) (°C)	ISO 75-2	91,0
Tensile Strength (MPa)	ISO 527	18,4 / - / 13,7
Elongation at Break (%)	ISO 527	1,4 / - / 1,3
Young's Modulus (MPa)	ISO 527	1588 / - / 1603
Impact Strength Izod (notched) (kJ/m²)	ISO 180	6,9 / 7,1 / 4,8
Impact Strength Izod (unnotched) (kJ/m²)	ISO 180	35 / 57,1 / 9,1



Complete TDS


## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
240-260	-	100-120	spray	≥0,4	40-80



# Ultrafuse® Support Layer

Support Filaments

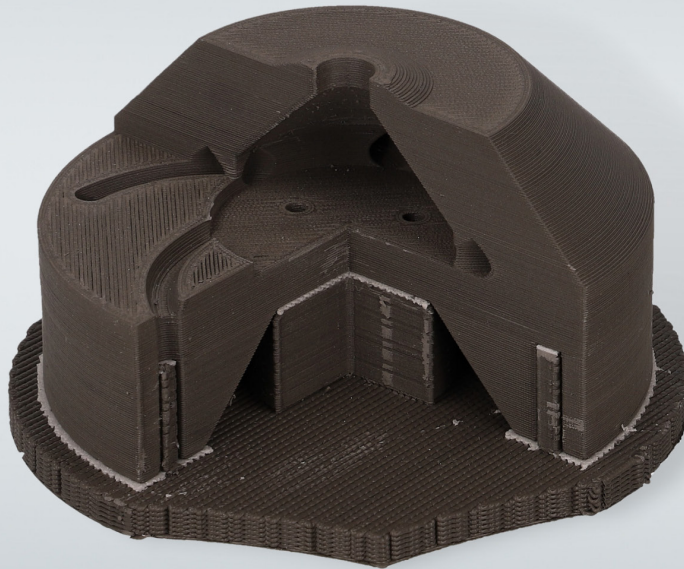

Technology:

Fused Filament Fabrication

Color:

Natural



Suitable for  
Ultrafuse® metal  
filaments



Allows a wider  
range of designs



Excellent  
surface quality  
of supported  
areas of the part



Minimizes  
distortion during  
debinding and  
sintering



# Ultrafuse® Support Layer

## Suited for:



Series production



Functional parts and prototypes



Tooling



Jigs and fixtures

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Additional Information

Ultrafuse® Support Layer is not developed to print stand-alone parts and should only be printed as a layer attached to the support structures in dual extrusion prints for Ultrafuse® metal filaments.

**\*\*This product is not intended for sale, distribution or use in the US and Canada and is not available to our customers in those countries.**



[Complete TDS](#)

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
245-260	passively heated, closed chamber	-	-	≥0,4	15-20



# Ultrafuse® PPSU

## High Temperature Filaments

Technology:

Fused Filament Fabrication

Color:

Natural



High  
dimensional  
stability



Resistant to  
hot water and  
coolants



Resistant  
to long-  
term service  
temperatures up  
to 180°C



Inherently flame  
retardant

# Ultrafuse® PPSU

## Suited for:



Suitable for autoclaving processes



Aerospace



High-temperature applications

## Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZX
HDT (0.45 MPa) (°C)	ISO 75-2	215,0
Tensile Strength (MPa)	ISO 527	74.5 / - / 49
Elongation at Break (%)	ISO 527	7.3 / - / 2.9
Young's Modulus (MPa)	ISO 527	2221 / - / 2150
Impact Strength Izod (notched) (kJ/m <sup>2</sup> )	ISO 180	13,7 / 15,8 / 5,3
Impact Strength Charpy (notched) (kJ/m <sup>2</sup> )	ISO 179-2	21,8 / 15,0 / 5,7



Complete TDS

## Advanced Testing

Volume resistivity [Ωcm]	Surface resistivity [Ωcm]	Dielectric strength (ortho) [kV/mm]	Vicat softening point (50 N) [°C]	Flame class rating	Glow wire test (GWEPT)	Coefficient of Thermal Expansion
IEC 62631-3-1	IEC 62631-3-2	IEC 62631-3-1	ISO 306	UL94	IEC 60695-2-11	ISO 11359-2
2,60E+15 / - / -	2,60E+15	18,5	217,0	V0 @ 1.5 mm and 3.0 mm thickness	960 °C @ 1.5 mm and 3.0 mm thickness	55 E-6/K
Flammability F1 60 sec. vertical	Flammability F2 12 sec. vertical	HR Total Heat Release [KW*min/m <sup>2</sup> ]	HRRmax [KW/m <sup>2</sup> ]	Optical Smoke Density	Smoke Toxicity	Railway
FAR 25.853 (a) (thickness 1.6 and 6.35 mm)	FAR 25.853 (a) (thickness 1.6 and 6.35 mm)	FAR 25.853 (d) (thickness 1.0 and 4.0 mm)	FAR 25.853 (d) (thickness 1.0mm)	FAR 25.853 (d) (thickness 1.0 and 4.5 mm)	AITM 3.0005 (thickness 1.5 and 4.5 mm)	EN 45545-2 (thickness 1.5 and 3.0 mm)
Passed	Passed	Passed	Passed	Passed	Passed	Classified HL1-3 R7*, R23, R24, R26 * HL1-2 1.5mm

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
390-410	170-210	190-220	glass	≥0,4	25-80

This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

# Ultrafuse® PLA Tough

## Engineering Filaments

Technology:

Fused Filament Fabrication

Color:

Natural, Black




Speed of  
printing



Strength



Consistency

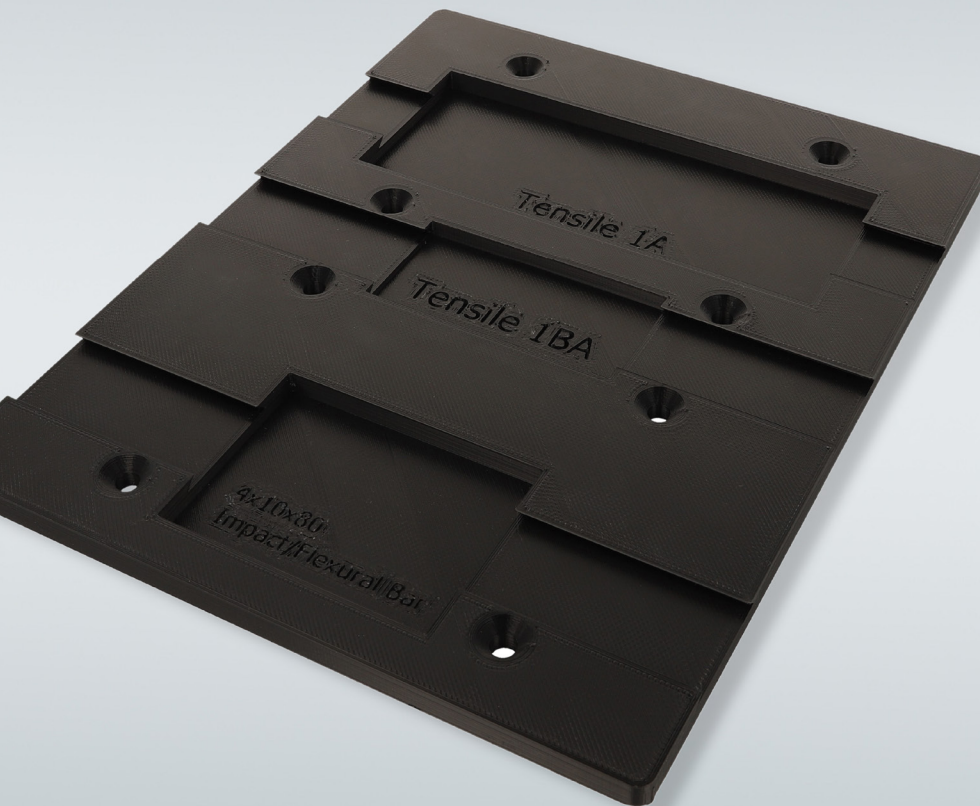

# Ultrafuse® PLA Tough

## Suited for:



Jigs & fixtures



Prototyping



Orthotics and Prostheses

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

## Technical Specifications

Mechanical properties	Standard	Value <i>XY / XZ / ZY</i>
Tensile Strength (MPa)	ISO 527	40 / - / 28
Elongation at Break (%)	ISO 527	7.4 / - / 2.2
Young's Modulus (MPa)	ISO 527	2672 / - / 2576
Impact Strength	ISO 179-2	33 / 34 / 10
Flexural Strength	ISO 178	73 / 75 / 51



Complete TDS

## Advanced Testing


Skin Contact /  
Biocompatibility

ISO 10993-5;  
ISO 10993-10

Passed

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
200-220	-	50-70	glass	≥0,4	40-300

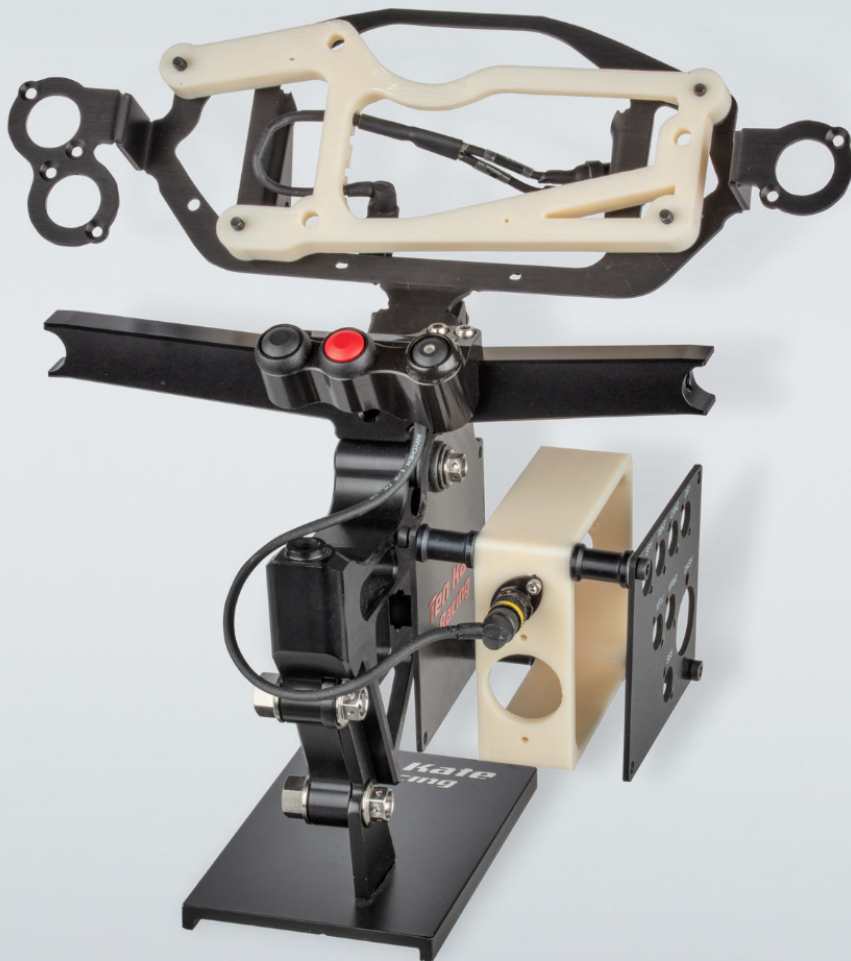

# Ultrafuse® ABS Fusion+

Engineering Filaments

Technology:

Fused Filament Fabrication

Color:

Natural, Black, Grey



Easy to print



Direct printing  
on heated glass  
or print bed  
surfaces



High heat  
resistance



Adheres to water  
soluble support

# Ultrafuse<sup>®</sup>

## ABS Fusion+

Suited for:



Jigs & fixtures



Automotive parts

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZX
HDT (0.45 MPa) (°C)	ISO 75-2	91,0
Tensile Strength (MPa)	ISO 527	29,5 / - / 17,9
Elongation at Break (%)	ISO 527	10,9 / - / 2,1
Young's Modulus (MPa)	ISO 527	1379 / - / 1106
Impact Strength Izod (notched) (kJ/m <sup>2</sup> )	ISO 180	26,4 / 38,4 / 2,2
Impact Strength Izod (unnotched) (kJ/m <sup>2</sup> )	ISO 180	73,1 / 131,1 / 6,6



Complete TDS

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
240-260	-	100-120	glass + spray glue	≥0,4	40-80





Technology:

Fused Filament Fabrication

Color:

Natural, Black



UV Stabilized



Weather  
resistance



Chemical  
resistance



Resistant to  
wear and tear

# Ultrafuse® ASA

## Suited for:



Outdoor use



Functional  
prototypes



Chemical  
environment



Reasonable  
heat  
resistance

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZX
HDT (0.45 MPa) (°C)	ISO 75-2	101,0
Tensile Strength (MPa)	ISO 527	34,6 / - / 12
Elongation at Break (%)	ISO 527	4,5 / - / 1
Young's Modulus (MPa)	ISO 527	1828 / - / 1400
Impact Strength Izod (notched) (kJ/m²)	ISO 180	8,7 / 11,4 / 1,9
Impact Strength Izod (unnotched) (kJ/m²)	ISO 180	36,8 / 39,3 / 6,8



Complete TDS

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
260-280	passively heated, closed chamber	100-120	spray or PC adhesive	≥0,4	30-60



# Ultrafuse® PA

## Engineering Filaments

Technology:

Fused Filament Fabrication

Color:

Natural & Black



Good fatigue  
resistance



Good wear  
resistance/  
lubricity



Good impact  
resistance at low  
temperatures



Low melting  
point makes  
it printable  
for many FFF  
printers

# Ultrafuse® PA

## Suited for:



Suitable for  
a wide range  
of different  
components  
and machine  
elements



Most  
engineering  
sectors

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZX
HDT (0.45 MPa) (°C)	ISO 75-2	135,0
Tensile Strength (MPa)	ISO 527	33,2 / - / 17,6
Elongation at Break (%)	ISO 527	143,3 / - / 12,8
Young's Modulus (MPa)	ISO 527	395,0 / - / 334,0
Impact Strength Izod (notched) (kJ/m²)	ISO 180	85,4 / 106,0 / 10,1
Impact Strength Charpy (notched) (kJ/m²)	ISO 179-2	- / 136,0 / 9,4



Complete TDS

## Advanced Testing


Vicat softening point (50  
N) [°C]

ISO 306

172,0

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
220-250	-	90-120	glass with PVA	≥0,4	30-60

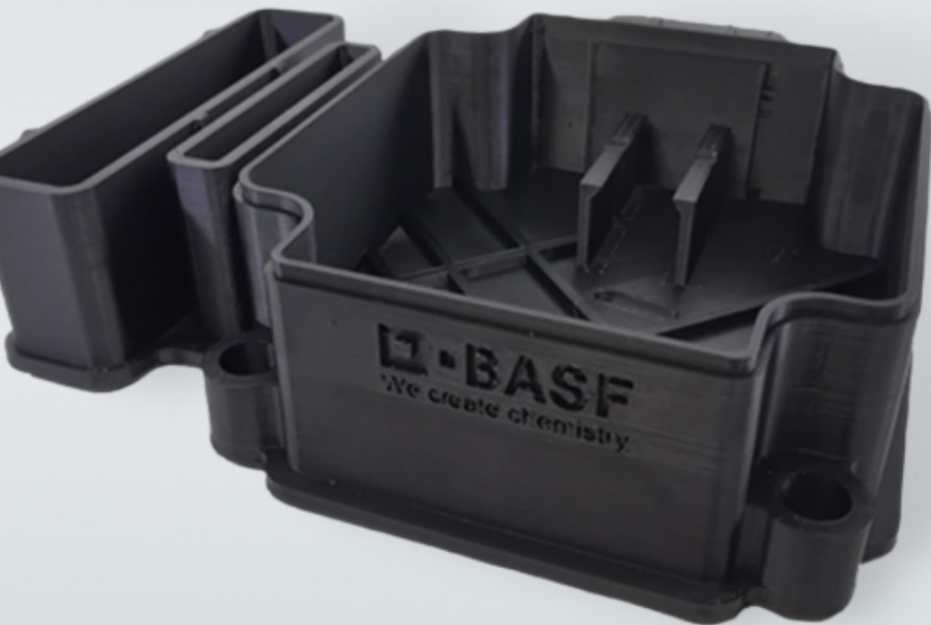

# Ultrafuse® PC/ABS FR

## Engineering Filaments

Technology:

Fused Filament Fabrication

Color:

Black



Outstanding  
aesthetics



Strong layer  
adhesion



High print  
speeds possible



UL94 V0 flame  
retardancy

# Ultrafuse® PC/ABS FR

## Suited for:



Housing for  
Raspberry pi



Sockets and  
plugs



Housing for  
handheld  
devices or  
powertools



Automotive  
components

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

## Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZX
HDT (0.45 MPa) (°C)	ISO 75-2	86,0
Tensile Strength (MPa)	ISO 527	50,1 / - / 17,3
Elongation at Break (%)	ISO 527	10,7 / - / 0,8
Young's Modulus (MPa)	ISO 527	2545 / - / 2188
Impact Strength Izod (notched) (kJ/m²)	ISO 180	16,8 / 30,3 / 1,8
Impact Strength Izod (unnotched) (kJ/m²)	ISO 180	16,8 / 30,3 / 1,8




Complete TDS

## Advanced Testing

Flame class rating	Glow wire test (GWEPT)	Railway
UL94	IEC 60695-2-11	EN 45545-2 (thickness 1.5 and 3.0 mm)
V0 @ 1.5 mm and 3.0 mm thickness	725 °C @ 1.5 mm thickness 960 °C @ 3.0 mm thickness	Classified HL1-3 R26

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
260-280	passively heated, closed chamber	90-110	glass	≥0,4	30-50

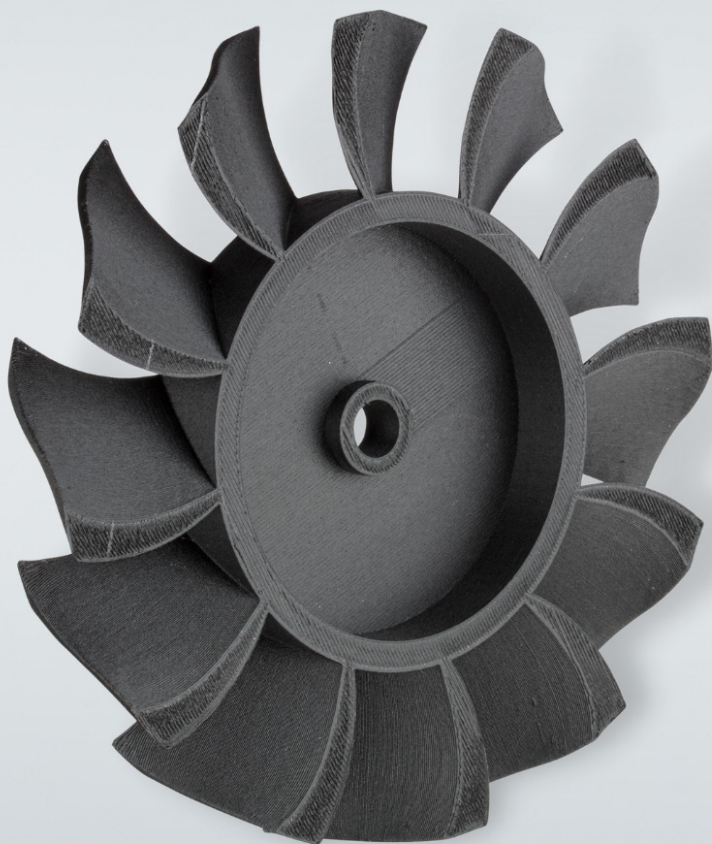

# Ultrafuse® PP GF30

## Reinforced Filaments

Technology:

Fused Filament Fabrication

Color:

Black



Excellent  
chemical  
resistance



High heat  
resistance



Improved UV  
resistance



Low moisture  
uptake



# Ultrafuse® PP GF30

## Suited for:



Functional  
prototyping



Automotive/  
transportation



Jigs and  
fixtures

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZY
HDT (0.45 MPa) (°C)	ISO 75-2	127,0
Tensile Strength (MPa)	ISO 527	41,7 / - / 15,9
Elongation at Break (%)	ISO 527	4,4 / - / 0,8
Young's Modulus (MPa)	ISO 527	2628 / - / 2242
Impact Strength Izod (notched) (kJ/m²)	ISO 180	5,6 / 6,2 / 1,4
Impact Strength Izod (unnotched) (kJ/m²)	ISO 180	20,5 / 2,4 / 2,6



Complete TDS

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
240-260	-	20-40 / 70-90	PP strapping tape / PPGF adhesive	≥0,6	30-80

# Ultrafuse® PET CF15

## Reinforced Filaments

Technology:

Fused Filament Fabrication

Color:

Black



Strong, rigid  
components



Very low  
moisture  
absorption



High  
dimensional  
stability



Heat resistant up  
to 108



# Ultrafuse® PET CF15

## Suited for:



Automotive



Jigs & fixtures



Applications  
for humid  
operating  
environments

## Technical Specifications

Mechanical properties	Standard	Value <i>XY / XZ / ZX</i>
HDT (0.45 MPa) (°C)	ISO 75-2	108,0
Tensile Strength (MPa)	ISO 527	63,2 / - / 12,5
Elongation at Break (%)	ISO 527	3,7 / - / 0,5
Young's Modulus (MPa)	ISO 527	6178 / - / 2822
Impact Strength Izod (notched) (kJ/m²)	ISO 180	5,7 / 5 / 2
Impact Strength Izod (unnotched) (kJ/m²)	ISO 180	25,1 / 22,6 / 2,4



Complete TDS

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
250-270	-	65-85	PEI or glass	≥0,6	30-80

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.



# Ultrafuse® PAHT CF15

## Reinforced Filaments

Technology:

Fused Filament Fabrication

Color:

Black



Higher chemical  
resistance than  
most PA grades



Strong, rigid  
components



High  
dimensional  
stability



Low moisture  
absorption

# Ultrafuse® PAHT CF15

## Suited for:



Automotive



Complex geometries in challenging environments

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZY
HDT (0.45 MPa) (°C)	ISO 75-2	128,0
Tensile Strength (MPa)	ISO 527	62,9 / - / 19,1
Elongation at Break (%)	ISO 527	2,9 / - / 0,8
Young's Modulus (MPa)	ISO 527	5052,0 / - / 2455,0
Impact Strength Izod (notched) (kJ/m²)	ISO 180	6,5 / 5,8 / -
Impact Strength Izod (unnotched) (kJ/m²)	ISO 180	16,3 / 15,1 / 4,1



Complete TDS

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
260-280	-	100-120	PEI or glass	≥0,6	30-80



# Ultrafuse® PA6 GF30

## Reinforced Filaments

Technology:

Fused Filament Fabrication

Color:

Black



Good chemical  
resistance



Very high  
stiffness and  
strength



Resistance  
to UV light  
exposure



Excellent layer  
adhesion

# Ultrafuse® PA6 GF30

## Suited for:



Industrial  
tooling



Automotive /  
transportation



Functional  
prototyping

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZY
HDT (0.45 MPa) (°C)	ISO 75-2	114,0
Tensile Strength (MPa)	ISO 527	46,4 / - / 12,2
Elongation at Break (%)	ISO 527	3,2 / - / 1,9
Young's Modulus (MPa)	ISO 527	2469,0 / - / 1156,0
Impact Strength Izod (notched) (kJ/m²)	ISO 180	20,9 / 19,0 / 2,7
Impact Strength Izod (unnotched) (kJ/m²)	ISO 180	36,9 / 41,4 / 3,8



Complete TDS

## Advanced Testing

Vicat softening  
point (50 N) [°C]

ISO 306

192,0

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
240-280	-	70-100	glass	≥0,6	30-80



# Ultrafuse® PC GF30

## Reinforced Filaments

Technology:

Fused Filament Fabrication

Color:

Black



UL94 V0 flame  
retardancy



Very low  
moisture  
absorption



Good  
temperature  
resistance



Good heat  
deflection  
temperature



# Ultrafuse® PC GF30

## Suited for:



Electronics



Automotive /  
transportation



Functional  
prototyping

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZY
HDT (0.45 MPa) (°C)	ISO 75-2	134,0
Tensile Strength (MPa)	ISO 527	36,1 / - / 11,2
Elongation at Break (%)	ISO 527	2,4 / - / 1,1
Young's Modulus (MPa)	ISO 527	2664,0 / - / 1231,0
Impact Strength Izod (notched) (kJ/m²)	ISO 180	5,6 / 5,4 / 2,1
Impact Strength Izod (unnotched) (kJ/m²)	ISO 180	13,9 / 17,8 / 3,4



Complete TDS

## Advanced Testing

Flame class rating	Railway
UL94	EN 45545-2 (thickness 1.5 and 3.0 mm)
V0 @ 1.5 mm and 3.0 mm thickness	Classified HL1-3 R22, R23, R24, R26

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
280-330	-	80-100	PC adhesive	≥0,6	30-60



# Ultrafuse® TPU 85A

## Flexible Filaments

Technology:

Fused Filament Fabrication

Color:

Natural



High tensile strength and outstanding resistance to tear propagation



Excellent damping characteristics



High resistance to oils, greases, oxygen and ozone



Very good low-temperature flexibility

# Ultrafuse® TPU 85A

## Suited for:



Automotive,  
industrial  
manufacturing  
agriculture and  
construction



Footwear,  
sports and  
leisure



Functional  
flexible parts

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZK
Compression Set at 23 °C, 72 h (%)	ISO 815	26,0
Abrasion Resistance (mm <sup>3</sup> )	ISO 4649	82,0
Shore A Hardness (3 s)	ISO 7619-1	85,0
Elongation at Break TPE (%)	ISO 527	600 / - / 320
Stress at Break TPE (MPa)	ISO 527	34 / - / 10
Tear Strength (kN/m)	ISO 34-1	80 / 18 / 30



Complete TDS

## Advanced Testing

Volume resistivity [Ωcm]	Dielectric strength (orthogonal) [kV/mm]	Skin Contact / Biocompatibility
IEC 62631-3-1	IEC 62631-3-1	ISO 10993-5; ISO 10993-10
2,60E+11 / - / 2,10E+11	21,0	Passed

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
200-220	-	40	glass	≥0,4	15-40

# Ultrafuse® TPU 64D

Flexible Filaments

Technology:

Fused Filament Fabrication

Color:

White, Black



High resistance  
to oils, greases,  
oxygen and  
ozone



Compatible with  
water soluble  
support



High impact  
resistance



High wear  
and abrasion  
resistance



# Ultrafuse® TPU 64D

## Suited for:



Tooling, jigs  
and fixtures



Functional  
flexible parts



Wear and tear  
application

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

## Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZX
Compression Set at 23 °C, 72 h (%)	ISO 815	25,0
Abrasion Resistance (mm <sup>3</sup> )	ISO 4649	43,0
Elongation at Break TPE (%)	ISO 527	399 / - / 115
Stress at Break TPE (MPa)	ISO 527	37 / - / 19
Tear Strength (kN/m)	ISO 34-1	66 / 37 / 79



[Complete TDS](#)

## Advanced Testing

Skin Contact /  
Biocompatibility

ISO 10993-5; ISO  
10993-10

Passed

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
230-255	-	55	glass	≥0,4	30-60



# Ultrafuse® TPU 95A

Flexible Filaments

Technology:

Fused Filament Fabrication

Color:

White, Black



Perfect for fast  
printing



High abrasion  
resistance



Good resistance  
to oils and  
common  
industrially used  
chemicals



Printable on  
direct drive and  
bowden style  
printers



# Ultrafuse® TPU 95A

## Suited for:



Wear and tear application



Functional flexible parts

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZY
Compression Set at 23 °C, 72 h (%)	ISO 815	38,0
Abrasion Resistance (mm <sup>3</sup> )	ISO 4649	64,0
Shore A Hardness (3 s)	ISO 7619-1	92,0
Elongation at Break TPE (%)	ISO 527	611 / - / 192
Stress at Break TPE (MPa)	ISO 527	44,2 / - / 12,2
Tear Strength (kN/m)	ISO 34-1	90 / 8 / 14



Complete TDS

## Advanced Testing

Skin Contact /  
Biocompatibility

ISO 10993-5; ISO  
10993-10

Passed

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
210-230	-	40	glass	≥0,4	15-40

# Ultrafuse® TPS 90A

## Flexible Filaments

Technology:

Fused Filament Fabrication

Color:

Natural White



Non-slip  
properties



Reduced  
moisture uptake



Excellent layer  
adhesion



Very good low-  
temperature  
flexibility



# Ultrafuse® TPS 90A

## Suited for:



Functional flexible parts



Handles of appliances



Seals and gaskets



Tooling, jigs and fixtures

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value XY / XZ / ZY
Compression Set at 23 °C, 72 h (%)	ISO 815	75,0
Abrasion Resistance (mm <sup>3</sup> )	ISO 4649	111,0
Shore A Hardness (3 s)	ISO 7619-1	89,0
Strain at Break TPE (%)	ISO 527	280 / - / 9
Stress at Break TPE (MPa)	ISO 527	7 / - / 2
Tear Strength (kN/m)	ISO 34-1	10 / 5 / 4



Complete TDS

## Advanced Testing

Skin Contact /  
Biocompatibility

ISO 10993-5; ISO  
10993-10

Passed

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
260-280	-	70-90	PEI, PI or glue	≥0,4	10-30

# Ultrafuse® 316L

## Metal Filaments

Technology:

Fused Filament Fabrication

Color:

Steel



Attractive  
Total Cost of  
Ownership



Fast material  
exchange



Easily applicable  
filament for FFF



Easy and  
affordable metal  
3D printing



# Ultrafuse® 316L

## Suited for:



Tooling



Jigs & fixtures



Functional  
prototypes



Suitable  
for serial  
production

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated June 2024.

## Technical Specifications

Mechanical properties	Standard	Value XY / ZY
Impact Strength Charpy (notched) (kJ/m2)	ISO 148-12	111,0
Tensile Strength (MPa)	ISO 6892-11	561 / 521
Elongation at Break (%)	ISO 6892-11	53 / 36
Yield Strength, Rp 0.2 (MPa)	ISO 6892-11	251 / 234
Vickers Hardness	ISO 6507-1	128 HV10 / 128HV10



Complete TDS

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
230-250	-	90-120	glass + tape or glue	≥0,4	15-50



# Ultrafuse® 17-4 PH

## Metal Filaments

Technology:

Fused Filament Fabrication

Color:

Steel



Easy and  
affordable way  
of metal 3D  
printing



Fully hardened  
enables highest  
strength



Wide range of  
post-processing  
options for green  
parts



High mechanical  
strength and  
hardness

# Ultrafuse® 17-4PH

## Suited for:



Tooling



Jigs & fixtures



Functional parts & prototypes



Series production

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

## Technical Specifications

Mechanical properties	Standard	Value XY / ZX
Tensile Strength (MPa)	ISO 6892-11	990 / 1004
Elongation at Break (%)	ISO 6892-11	4 / 4
Yield Strength, Rp 0.2 (MPa)	ISO 6892-11	756 / 764
Vickers Hardness HV10	ISO 6507-1	291 / 309



Complete TDS

## Print Settings

Nozzle Temperature [°C]	Build Chamber Temperature [°C]	Bed Temperature [°C]	Bed Material	Nozzle Diameter [mm]	Print Speed [mm/s]
230-250	-	90-120	glass + tape or glue	≥0,4	15-50





# FUSED GRANULATE FABRICATION

Engineering-Grade Materials in  
Pellet Form for Large Scale 3D  
Printing

Extending the excellence of our  
premium filaments, Ultrafuse® Pellets  
provide engineering-grade Fused  
Granulate Fabrication (FGF) materials  
for cost-effective, large-scale 3D  
printing.

# Ultrafuse® Pellets

Suited for:



Decorative parts



Automotive



Prototyping



Chemical Resistance



Jigs & Fixtures

Access all resources by scanning the QR Code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied.

## Material Details


		
<b>Ultrafuse® Pellets rPETG</b>	<b>Ultrafuse® Pellets PC GF30</b>	<b>Ultrafuse® Pellets PP GF30</b>
Standard Pellet Line	Reinforced Pellet Line	Reinforced Pellet Line
Recycled, glycol-modified PET pellets for sustainable, cost-effective, and time-saving large scale 3D printing with excellent surface quality, and high transparency.	Advanced polycarbonate (PC) micro pellets reinforced with 30% glass fiber, providing extreme stiffness, temperature stability, and flame retardancy.	High-performance polypropylene (PP) micro pellets, reinforced with 30% glass fiber, ensuring high stiffness, high heat resistance, and enhanced UV stabilization.
<p>Key Benefits:</p> <ul style="list-style-type: none"><li>• Recycled, traceable industrial waste source</li><li>• Superior Optical Appearance</li><li>• Easy to print</li><li>• Great low warping end results</li></ul>	<p>Key Benefits:</p> <ul style="list-style-type: none"><li>• Fulfills flame retardancy according to UL 94 V-0</li><li>• High Stiffness, Glass Fiber Reinforced</li><li>• Temperature Stability</li><li>• UV Resistance</li></ul>	<p>Key Benefits:</p> <ul style="list-style-type: none"><li>• Excellent chemical resistance</li><li>• Low density &amp; moisture uptake</li><li>• High heat resistance</li><li>• Excellent for demanding applications</li></ul>
<p>Example Applications</p> <ul style="list-style-type: none"><li>• Decorative Parts</li><li>• Automotive Parts</li><li>• Prototyping</li><li>• Architectural Parts</li></ul>	<p>Example Applications</p> <ul style="list-style-type: none"><li>• Spare parts in railway and automotive sectors</li><li>• High-temperature tooling</li><li>• Industrial installations</li><li>• Environments requiring high temperature and moisture stability</li></ul>	<p>Example Applications</p> <ul style="list-style-type: none"><li>• Automotive / transportation</li><li>• Functional prototyping</li><li>• Tooling, jigs and fixtures</li></ul>



## SOLUTIONS & SERVICES

More than just material – From design to the finished product:

Discover the full range of Ultrasim® 3D Services to support customers, from design for AM and simulation of part behavior to post-processing the final part.

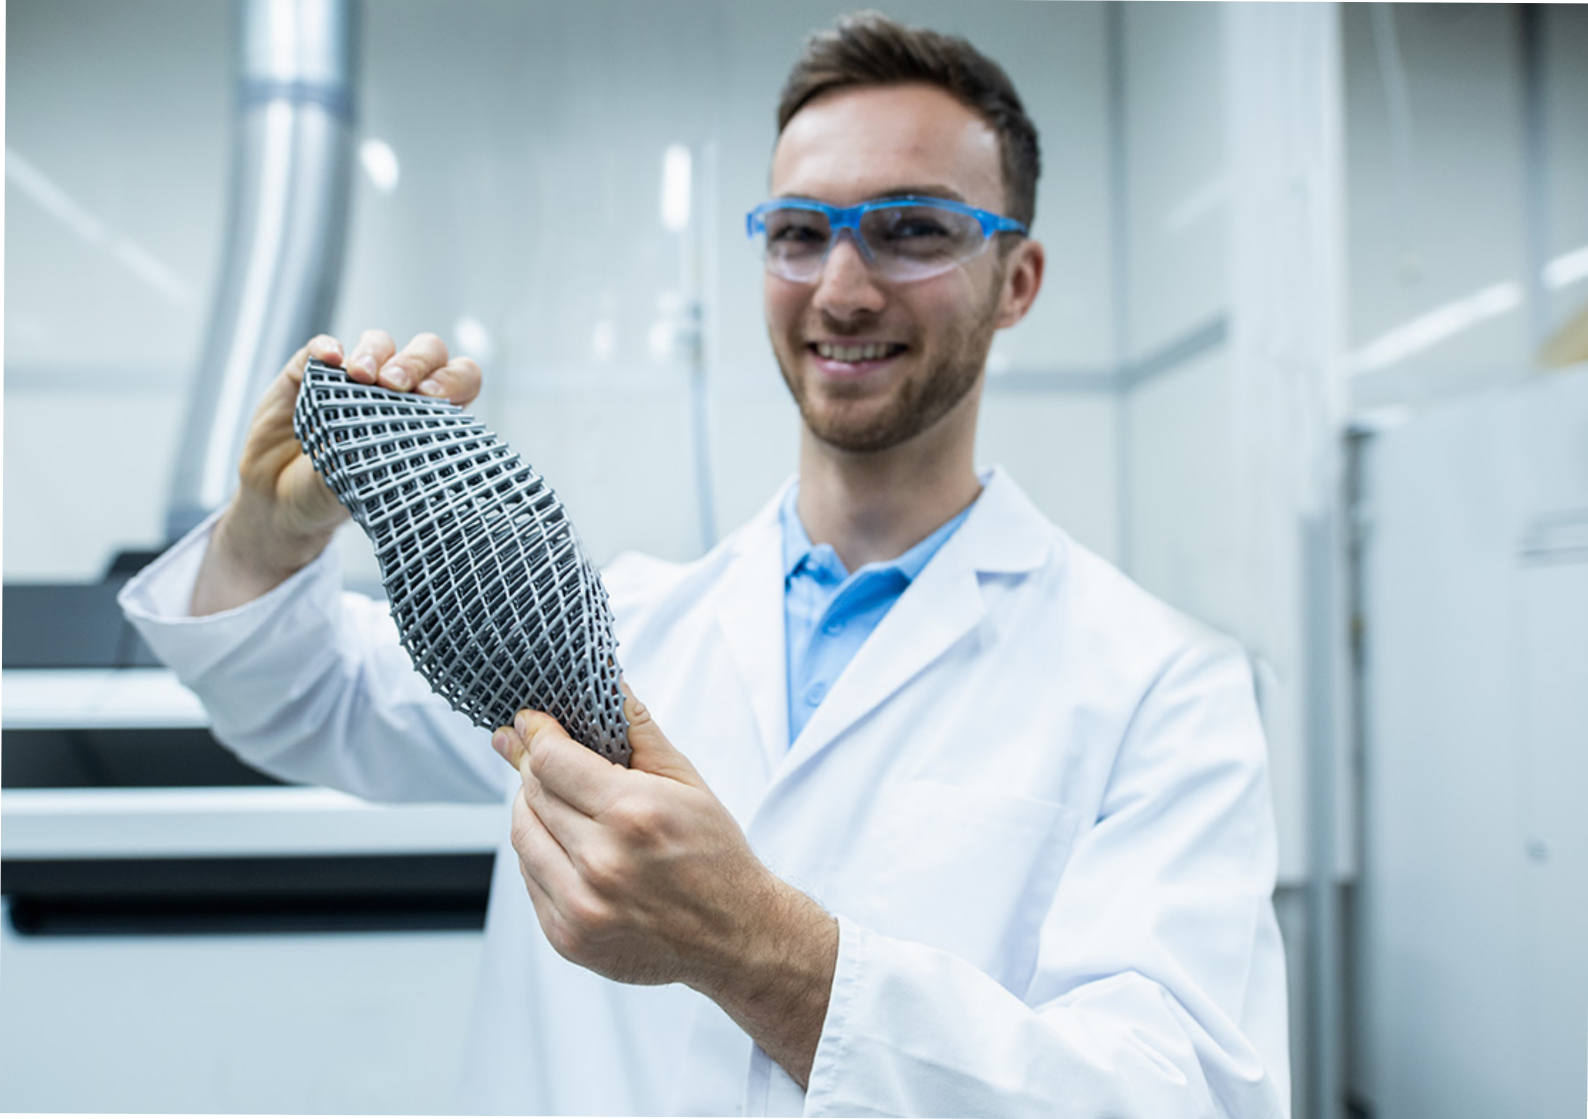



# Ultrasim® 3D Lattice Design

---

## Technologies:

HP MJF Technologies

SLS Technologies

---

- Increased Comfort
- Aeration
- Weight Reduction
- Optimized Material Performance

# Ultrasim® 3D Lattice Design

## Suited for:



Footwear



Industrial



Sports



Automotive



Medical Applications



Consumer Goods

Access all resources by scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

## Offers

	Lattice Design Service	Foam Replacement	Full Engineering Support
Description	Custom designed lattice including partial and multi-zone lattices	Custom foam replacement lattice design using proprietary FEA and lattice library	Complete product design development lattice engineering
STL file of digital lattice part	■	■	■
Digital Stress-Strain Curves of all lattices	■	■	■
Customized 3D Printed Lattice sample		■	■
Digital Stress-Strain Curves of tested foam		■	■
Full Engineering			■
Material Compatibility	Full Ultrasim® Powders line	Ultrasim® TPU01	Full Ultrasim® Powders line Full Ultracur3D® Photopolymers line Full Ultrafuse® Filaments line

# Lattice Design in HyDesign

Material Compatibility:  
Ultrasint® Powders

- Effortless Lattice Design,  
Simplified Access
- Design Anywhere, Anytime  
with HyDesign
- Free 30-Day Trial



# Lattice Design in HyDesign

Suited for:



Footwear



Seating







Protection

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied.

## Workflow



### 1. Upload STL

Upload your solid STL file and choose the material the part will be produced in.

### 2. Select Lattice

Choose from pre-engineered lattices designed specifically for different applications by using either:

a) The Ultrasim® 3D Lattice Test Pad to select the desired lattice by feel.

b) The Ultrasim® 3D Lattice Library to select by mechanical data of stress-strain curves and specifying different mechanical properties.

### 3. Generate and Download Lattice File

The selected lattice is automatically generated into the part. You can download the ready-to-print STL and print your part.

# Ultrasim® 3D Simulation (FEA)



## Material Compatibility:

Ultrasint® Powders

Ultracur3D® Photopolymers

- Ensure your design works
- Material data & modeling
- Quicker development cycles
- 3D design optimization

# Ultrasim® 3D Simulation (FEA)

## Suited for:



Footwear



Industrial



Sports



Automotive



Medical  
Applications



Consumer  
Goods

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

## Offers

	Starter	Premium	Enterprise
Description	Get the curves behind our TDS data to start basic simulation work. Add additional temperatures or strain-rates to the starter solution.	We run the simulation for you. We help you to speed up your engineering process and increases confidence in part performance using a digital twin of your part.	Use our in-house developed material models for 3D-Printing including anisotropy of the process and our experience in virtual Engineering.
Material Data at room temperature	■	■	■
3D Simulation (FEA) support		■	■
Ultrasim 3D material model as a service (incl. installation)			■
Material Compatibility (Preliminary Compatibility)	Ultrasint® TPU01 Ultrasint® PA6 MF  Ultracur3D® RG 35 Ultracur3D® RG 1100 Ultracur3D® ST 45 Ultracur3D® ST 80 Ultracur3D® EPD 2006  --- Ultrasint® PA11 Ultrasint® PA11 ESD Ultrasint® PA11 CF	Ultrasint® TPU01 Ultrasint® PA6 MF  Ultracur3D® RG 35 Ultracur3D® RG 1100 Ultracur3D® ST 45 Ultracur3D® ST 80 Ultracur3D® EPD 2006  --- Ultrasint® PA11 Ultrasint® PA11 ESD Ultrasint® PA11 CF	Ultrasint® TPU01 Ultrasint® PA6 MF Ultracur3D® RG 35  --- Ultrasint® PA11 Ultrasint® PA11 ESD Ultrasint® PA11 CF



## Ultracur3D® Coat F+

---

### Material Compatibility:

Ultracur3D® Powders

Ultracur3D® Photopolymers

Ultrafuse® Filaments

### Colors:

10+ Standard Colors

Custom Color services available

### Application Method:

Spraying

---



Highly Flexible



Waterbased  
Low VOC content



Broad Color  
Portfolio



# Ultracur3D® Coat F+

## Suited for:



Footwear



Industrial



Sports



Automotive



Medical  
Applications



Consumer  
Goods

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document was updated September 2023.

## Technical Specifications

Mechanical properties	Standard	Typical Value
Ph Value	DIN EN ISO 3251	7.0 – 8.0
Viscosity at 23°C, 1000 1/s	Spindle Viscometer	100 – 300 mPas
Density at 23°C	DIN EN ISO 2811-3	1.0 – 1.3 g/cm³
Solid content	DIN EN ISO 3251	34 – 48%
Flashpoint	ISO 3679	> 95°C



Complete TDS

## Tests & Certifications


Skin Contact	UV Stability	Hydrolysis Resistance
ISO 10993-5	ISO 4892-2A ISO 4892-2B Cycle 3	70°C / 95% rH / 168h

## User Guidelines

Mixing Ratio	Hardener	Reducer	Potlife at 20°C	Shelf life (5-35°C)	
100 : 4 by weight	Ultracur3D® Hardener F+	DI-Water	2 h	6 months	
Nozzle pressure	Nozzle size	Spray passes	Flash off at 23°C	Dry film thickness	Drying conditions
2 – 2.5 bar	1.3 mm	1.5 - 2	5 min	25 ± 5 µm	30 minutes at 80°C

## Material Compatibility

Ultrasint® TPU01	Ultracur3D® RG 35	Ultracur3D® EL 60	Ultrafuse® ASA
Ultrasint® TPU 88A	Ultracur3D® ST 45	Ultracur3D® EL 4000	Ultrafuse® TPU 85A
Ultrasint® PA11	Ultracur3D® FL 300	Ultracur3D® EPD 1086	Ultrafuse® TPU 90A
Ultrasint® PA11 Black CF	Ultracur3D® FL 60		Ultrafuse® TPU 64D
			Ultrafuse® TPS 90A

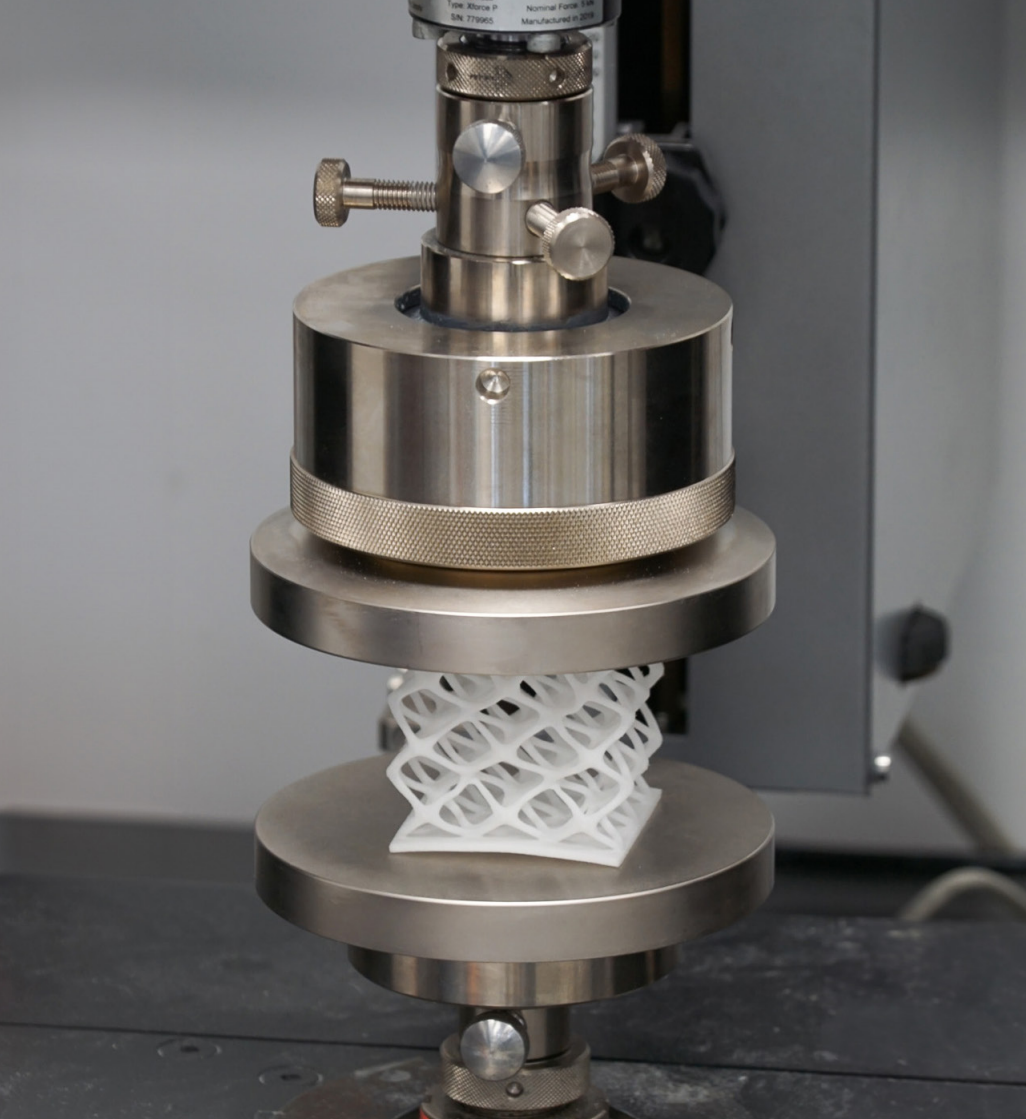

# Ultrasim® 3D Testing for AM (TfAM)

---

## Material Compatibility:

Ultrasint® Powders

Ultracur3D® Photopolymers

Ultrafuse® Filaments

Third Party Materials

---

- 150+ Test Methods
- Tests Beyond Standard
- Industry-Specific Tests for +9 Industries
- 150+ Years of Material Excellence

# Ultrasim® 3D Testing for AM (TfAM)

## Suited for:



Footwear



Industrial



Sports



Automotive



Medical  
Applications



Consumer  
Goods

Access all resources by scanning the  
QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied. This document .

## Offers

	Starter	Premium	Enterprise
	Testing On Demand	Monthly Subscription	Full-Service Testing
Description	Ideal for customers needing to understand material properties or verify that their 3D printed application meets testing requirements on demand.	Ideal for customers wanting to consistently track their quality in each print job and build up trust in their quality measures.	Ideal for customers wanting or already onboarded to our material with full support from our Product Teams.
Mechanical & Thermal Properties / Industry-Specific Properties / Test report as PDF	■	■	■
Priority Testing		■	■
Testing Consultancy & Print Parameter Optimization			■
Optional Add-on: Customized Parts Testing	■	■	■
Testable AM Materials (MJF/ SLS/ LCD/ DLP/ FFF)	Forward AM materials + 3rd party materials	Forward AM materials + 3rd party materials	Forward AM materials + Testing service to validate customer machines with Forward AM materials



# Ultrasim® 3D NextMold

## Fast-Track Prototyping with 3D Printed Mold Inserts

Specializing in injection molding inserts, Ultrasim® 3D NextMold leverages the advanced photopolymer material Ultracur3D® RG 3280 to help you accelerate your product development cycles and streamline the production of prototypes and small series.

- Clear Time Advantage
- Substantial Cost Advantage
- Material Authenticity

# Ultrasim® 3D NextMold

Suited for:



Automotive



Industrial



Consumer  
Goods

Access all resources by  
scanning the QR code



This information and values are presented as guidance only and based on Forward AM's knowledge and experience. It is believed to be accurate, however all guarantees are explicitly denied.

## Discover our Ultrasim® 3D NextMold Packages

	Ready to Print	Ready to Use	Enterprise
Design of 3D Printable Insert	■	■	■ Fast-Track
Printing Parameter Guidelines	■	■	■
Access to Learning Assets	■	■	■
3-Hour Expert Consulting	■	■	■
3D Printing Service	—	■	■ Service-Bureau Network
Software Partner for AM Design	—	—	■
Printer-on-Premise Solution	—	—	■
Workshops & Support	—	—	■



# am.

Our mission is to empower everyone  
to use AM in their manufacturing  
processes, simply and sustainably.



**forwardam.**

[www.forward-am.com](http://www.forward-am.com)