


Ultrasim® 3D Cost Analysis (TCO)


Do you meet your target costs with the material-technology-solution?

Using FFF, MJF, SLS, DLP, LCD

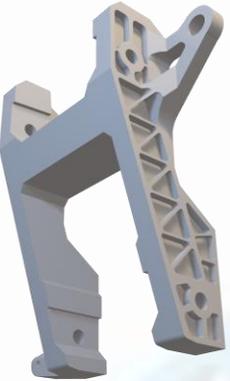


Your part

FFF:




MJF/SLS:





Benchmarking with 3D printing technologies

LCD/DLP:



Validated TCO tool with years of experience

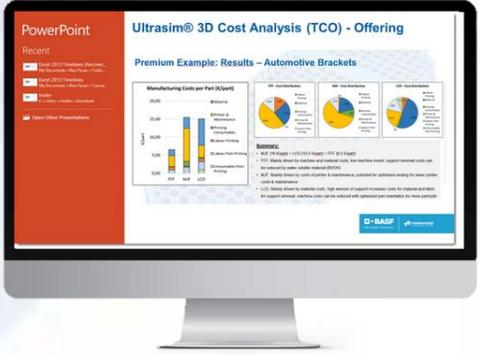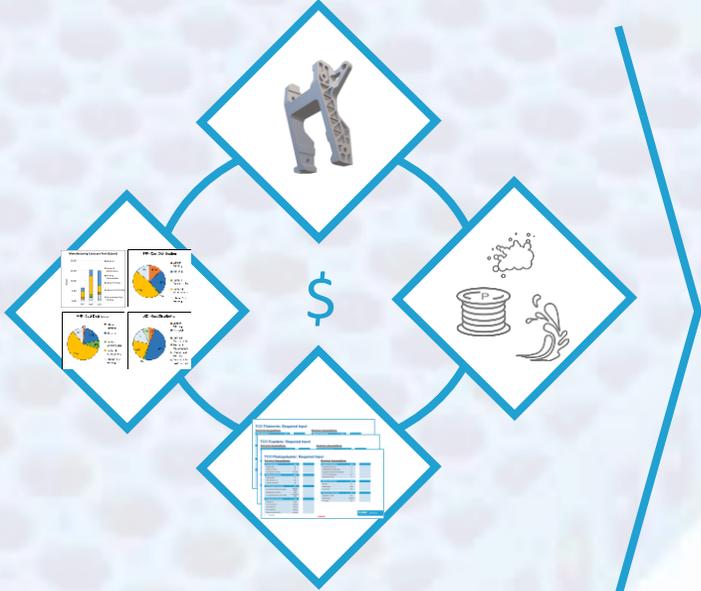

Cheapest 3DP solution

We only estimate manufacturing costs using industrial or customized production settings. If an offer from a service bureau is needed, please contact Sculpteo or the service bureau of your choice.


We support you in every stage – from starter to expert

➤ In the end, the 3D printed part has to meet your target costs. We offer quick feedback about cost per part, insights into cost structures and help to unlock the full potential for series applications:

Single Cost per Part

Starter:


- Understanding the cost structure of your 3D printed part and what drives the costs.

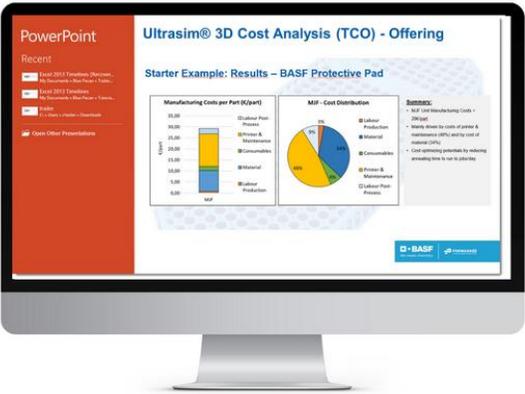

Cost Benchmarking

Premium:

- Compare the costs of several AM technologies and understand what technology might be most suitable for you.

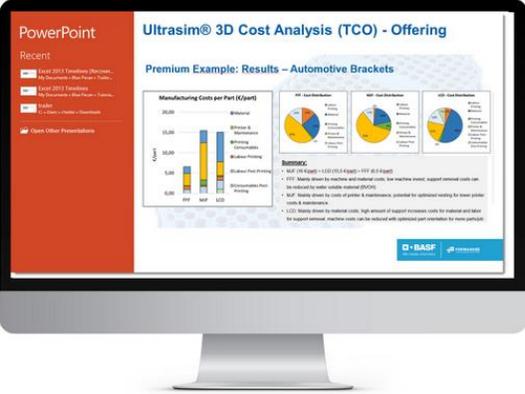

AM Cost Tool

Enterprise:

- Use our in-house developed AM Cost Tool for your own calculations.

Coming Soon

Ultrasim® 3D Cost Analysis (TCO) - Offering

	Single Cost per Part <u>Starter</u>	Cost Benchmarking <u>Premium</u>	AM Cost Tool <u>Enterprise</u>
	Understanding the cost structure of your 3D printed part and what drives the costs.	Compare the costs of several AM technologies and understand what technology might be most suitable for you.	Use our in-house developed AM Cost Tool for your own calculations.
What you get:	✓	✓	✓
• Cost report as PDF		✓	✓
• Cost comparison of two AM technologies/materials		✓	✓
• Sensitivity analysis (what-if-analysis of cost parameters)		✓	✓
• AM cost tool			✓
What AM technologies:	• MJF/ SLS/ LCD/ DLP/ FFF	• MJF/ SLS/ LCD/ DLP/ FFF	• MJF/ SLS/ LCD/ DLP/ FFF
What AM materials:	• BASF material portfolio	• BASF material portfolio • External materials	• BASF material portfolio
What we need from you:	• STEP/STL • TCO input data (PPT onepager)	• STEP/STL • TCO input data (PPT onepager)	• 1 hour of your time to understand your problem and derive a solution concept.
Get your Add-on:	-	• Add AM technology or material (+ 250€) • Add cost iterations (+ 250€)	
Price:	Starting at 290 €	Starting at 500 €	Coming Soon
Lead time:	14 days	On request	

How it Works

Heidelberg, 13.06.22



Starter Workflow: Single Cost per Part


1. Input data

You will receive a PDF including all necessary input data. Please return us the needed information to start your calculation.




2. Cost per Part analysis

We use our internal TCO tool developed over years to calculate the cost per part for your application.

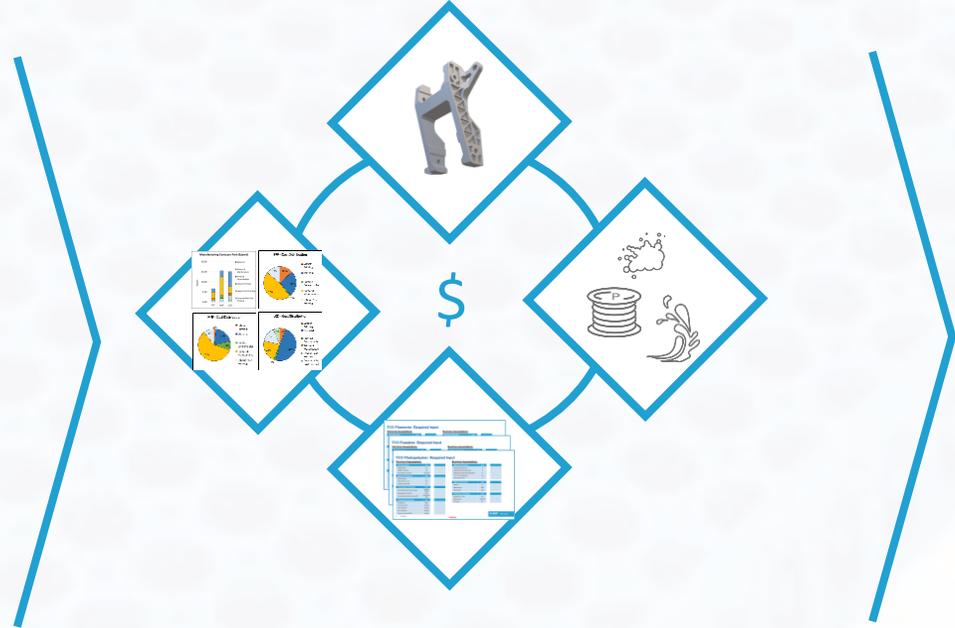

3. Cost Report

You receive the material deck including a PPT and the raw data of the materials requested.

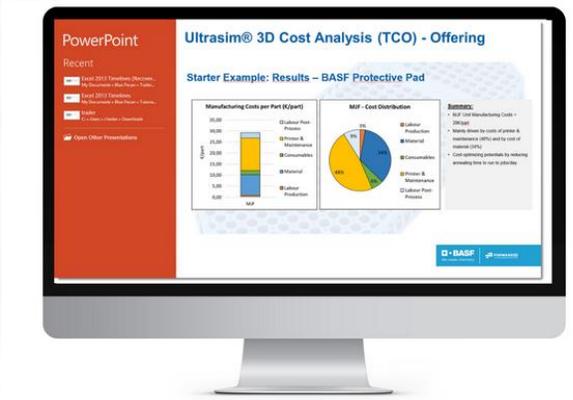


Starter Example: Ultrasint TPU01

Scenario Context:

- 1.000 3D-printed BASF-ProtectivPad Demonstrator
- Cost per part analysis for Ultrasint TPU01 with MJF
- Dimensions: 145 x 160 x 25 mm
- Volume: 121 cm³



Print Scenes:


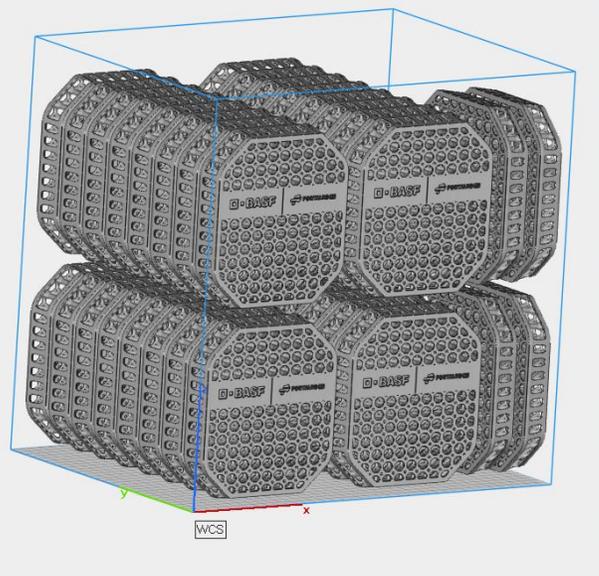


Material Information	Unit	MJF
Material name	[.]	Ultrasint TPU01
Material price	€/kg	List price
Refresh-rate	old/new	80:20
Part density	g/cm ³	1,1

Machine Information	Unit	MJF
Machine name	[.]	HP 5210 Pro
Build volume	mm	380 x 284 x 380
Assumed machine price/printer plus PPE and services	€	List price
Depreciation period	y	5

Production Information	Unit	MJF
Production volume	parts/year	1.000
Parts per build	parts/build	36
Workdays per week	d/y	5
Production days	h/y	250
Shifts per day	shift(s)/d	1
Total production time (print+setup)	h/job	16
Depowdering removal	min/part	2
FTE salary, operator	€/h	EU
Overhead (POH, IPOH & SGA)	%	Not taken into account

Starter Example: Results – BASF Protective Pad

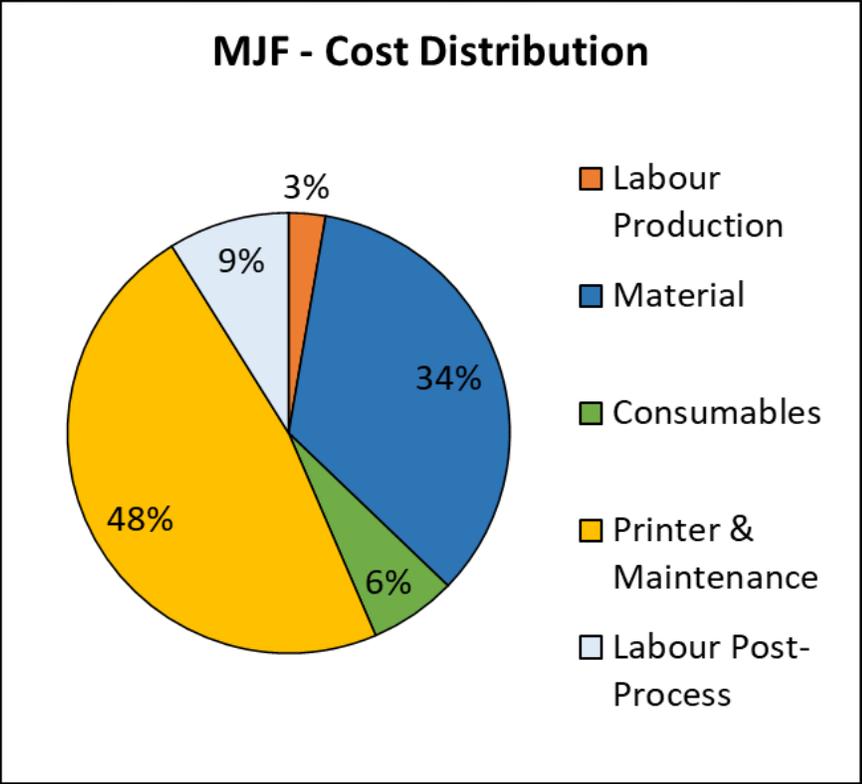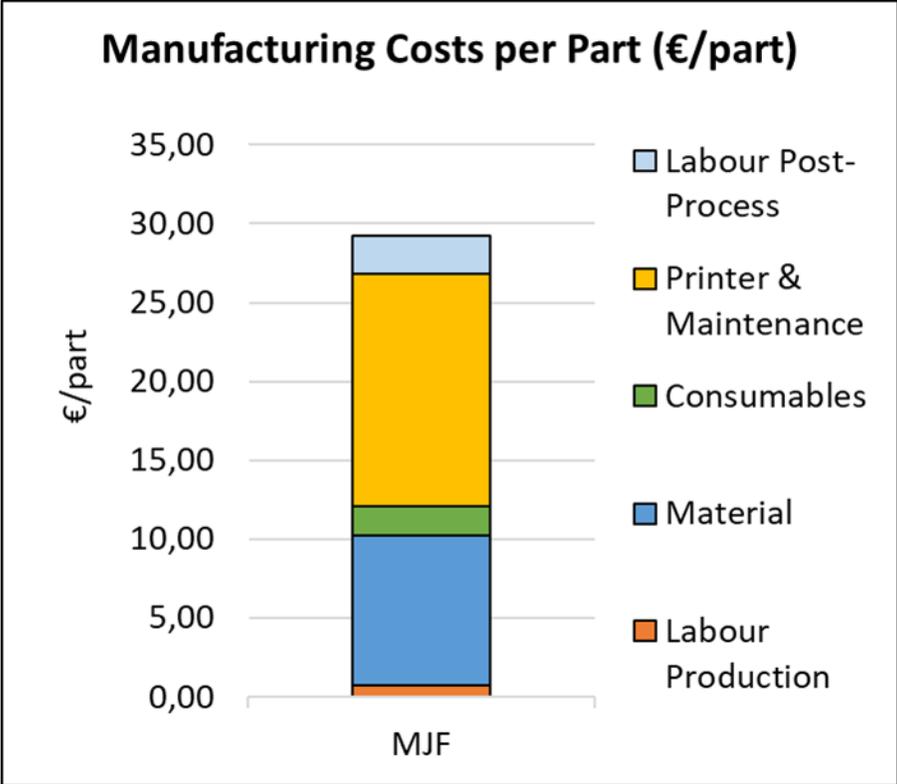

Summary:

- MJF Unit Manufacturing Costs = 28€/part
- Mainly driven by costs of printer & maintenance (48%) and by cost of material (34%)
- Cost optimizing potentials by reducing annealing time to run to jobs/day

Premium - Workflow: Cost Benchmarking

1. Schedule a 30min call

2. You provide input data

3. Cost per part analysis



4. Cost Report and TCO Presentation

Set up the customized production setting of your 3D printed part.

Technical and business assumptions needed for TCO.

We perform the cost per part analysis, and additional what-if-analyses.

Deep dive into cost structure and how to unlock the full potential for series applications

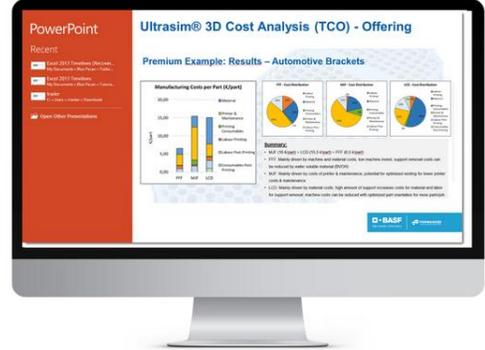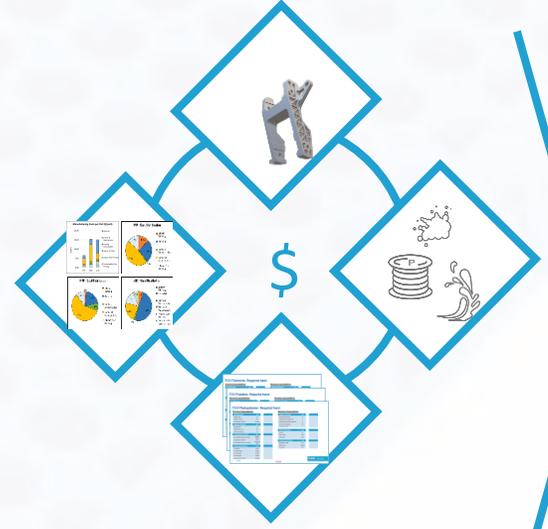

Premium Example: 3 Technologies


Scenario Context:

- 1.000 3D-printed automotive brackets per year
- Cost per part analysis for 3 different materials/technologies
 - LCD: Ultracur3D EPD 2006
 - MJF: HP PP
 - FFF: Ultrafuse ABS




Print Scenes:


LCD: Ultracur3D EPD 2006:

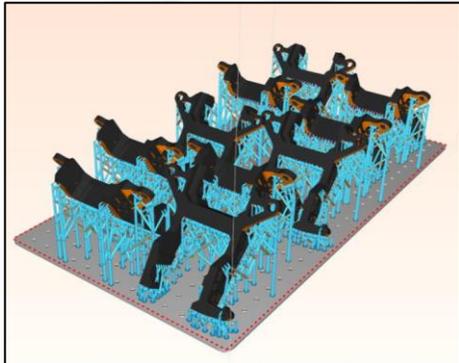

MJF: HP PP

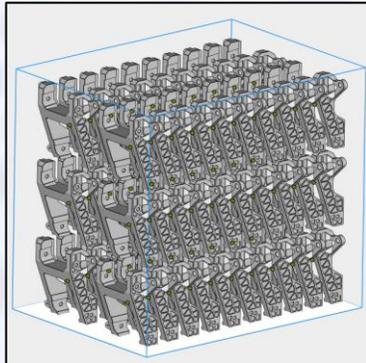

FFF: Ultrafuse ABS

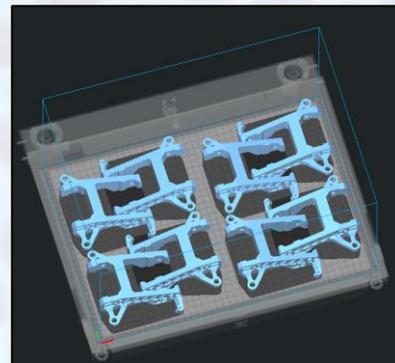

Material Information	Unit	FFF	MJF	LCD
Material name	[.]	ABS	PP	EPD 2006
Material price	€/kg			
Refresh-rate	old/new	-	80:20	-
Part density	g/cm ³	1,04	0,89	1,2


Machine Information	Unit	FFF	MJF	LCD
Machine name	[.]	Ultimaker S5	HP 5210 Pro	LC Magna
Build volume	mm	330 x 240 x 300	380 x 284 x 380	510 x 280 x 350
Assumed machine price/printer plus PPE and services	€			
Depreciation period	y	5		

Production Information	Unit	FFF	MJF	LCD
Production volume	parts/year	1.000		
Parts per build	parts/build	8	60	10
Workdays per week	d/y	5		
Production days	h/y	250		
Shifts per day	shift(s)/d	1		
Total production time (print+setup)	h/job	48	12	11
Manual support removal/Depowdering	min/part	1	2	5
FTE salary, operator	€/h	25		
Overhead (POH, IPOH & SGA)	%	Not taken into account		


Premium Example: Results – Automotive Brackets

Price:
 $500\text{€} + 1 \cdot 250\text{€}$
 $= 750\text{€}$


Manufacturing Costs per Part (€/part)

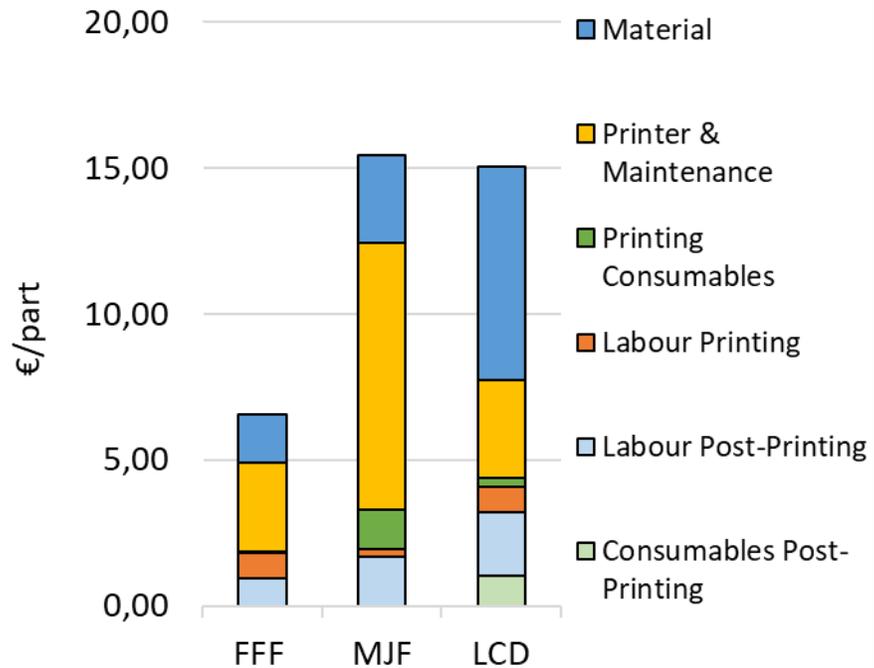


FFF - Cost Distribution

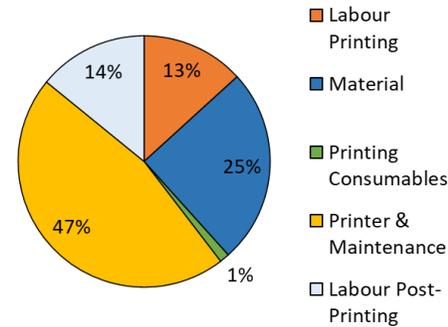

MJF - Cost Distribution

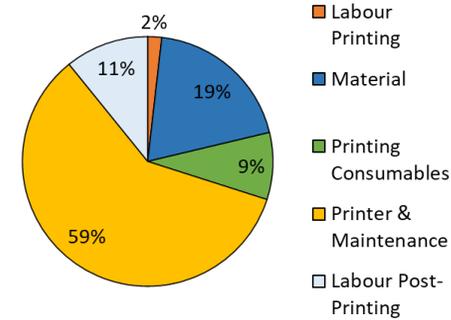

LCD - Cost Distribution

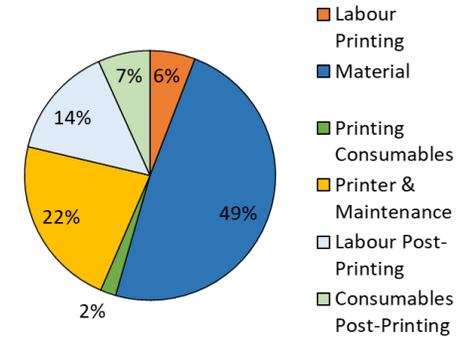

Summary:

- MJF (16 €/part) > LCD (15,5 €/part) > FFF (6,5 €/part)
- FFF: Mainly driven by machine and material costs; low machine invest; support removal costs can be reduced by water soluble material (BVOH)
- MJF: Mainly driven by costs of printer & maintenance; potential for optimized nesting for lower printer costs & maintenance
- LCD: Mainly driven by material costs; high amount of support increases costs for material and labor for support removal; machine costs can be reduced with optimized part orientation for more parts/job

Any Questions? Contact Us!

Dr. Florian Fischer
Head of Service and Solutions

Marius Haefele
Product Manager Services

Robin Adler
Product Manager Coatings

AMS@basf-3dps.com

 **BASF**

We create chemistry



FORWARD AM

Innovating Additive Manufacturing